

FALKEN

◆ SUMITOMO RUBBER INDUSTRIES, LTD.

FALKEN
ON THE PULSE

PATTERN DIGEST 2018

PASSENGER CAR TIRES
4WD AND RV TIRES
LIGHT TRUCK TIRES
TRUCK AND BUS TIRES

◆ SUMITOMO RUBBER INDUSTRIES, LTD.

Toyosu Center Building, 3-3, 3-chome,
Toyosu, Koto-ku, Tokyo 135-6005, Japan
TEL: +81-3-5546-0126 FAX: +81-3-5546-0146

12.2A18.1.TI広2(OS-303) Printed in Japan



FALKEN

True engineering that drives us forward
and moves us ahead of the times.

A youthful rhythm, full of passion
that turns people's heads.

The need to keep inspiring ourselves
—that's our heartbeat

Together we are FALKEN.

Forever we will be FALKEN.

We evoke this spirit in our
brand statement: On the pulse.

PATTERN DIGEST 2018


CONTENTS

INTRODUCTION	3 - 6
PASSENGER CAR TIRES	7 - 27
4x4[4WD] TIRES	28 - 39
LIGHT TRUCK TIRES	40 - 44
TRUCK AND BUS TIRES	45 - 67
CORPORATE DATA	69 - 70

INTRODUCTION

FALKEN offers a wide range of tires. This Pattern Digest is designed to help users apply these tires correctly. Inquiries and requests for additional information should be directed to the nearest FALKEN office or representatives. FALKEN tires conform to the following standards.
THE Japan Automobile Tyre Manufacturers Association, Inc. (JATMA)
The Tire and Rim Association, Inc. (TRA)
The European Tyre and Rim Technical Organisation (ETRTO)

NEW TIRE DIMENSIONS

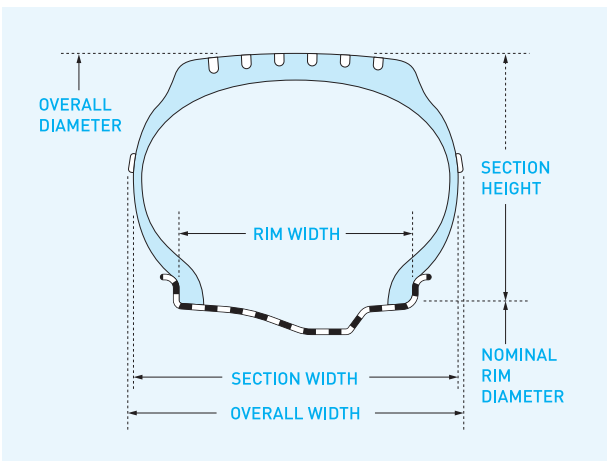

TIRE MEASUREMENT

Measurements should be taken for the mounted tire on its measuring rim at the recommended inflation pressure, with the tire allowed to stand for a minimum of 24 hours at normal temperature before readjustment of the pressure back to its original level.

SECTION WIDTH

Section width is the maximum width of the cross-section of inflated tires, excluding sidewall labeling (marking), decoration and protective bands or ribs.

SECTION HEIGHT

Section height is half the difference between the overall diameter and the nominal rim diameter.

OVERALL DIAMETER

Overall diameter is the diameter of the inflated new tire.

ASPECT RATIO

The aspect ratio is the percentage ratio of the section height to the section width of the tire on its theoretical rim.

PLY RATING

Ply Rating is the strength factor used to identify the load carrying capacity of a particular size of tire.

LOAD AND INFLATION PRESSURES

Tires are designed to carry a specific load which is related to inflation pressure. In the interest of optimum performance, the correct load, and inflation pressure relativity should be maintained. The maximum load and inflation pressure specified for each tire should not be exceeded.

LOAD INDEX

The LOAD INDEX is a numerical code associated with the maximum load a tire can carry at the speed indicated by its Speed Symbol under service conditions specified by the tire manufacturer.

SPEED SYMBOL

The SPEED SYMBOL indicates the maximum speed at which the tire can carry a load corresponding to its Load Index under service conditions specified by the tire manufacturer.

TIRE SIZE DESIGNATION

- (Example)
- (1) 6.95-14 4PR
6.95: Nominal section width in inches
14: Rim diameter code
4PR: Ply Rating
- (2) 175/70R13 82S
175: Nominal section width in mm
70: Aspect Ratio
R: Radial construction
13: Rim diameter code
82: Load Index
S: Speed Symbol
- (3) 31X10.50R15 6PR
31: Nominal overall diameter in inches
10.50: Nominal section width in inches
R: Radial construction
15: Rim diameter code
6: Ply Rating
- (4) 315/80R22.5 154/149L
315: Nominal section width in mm
80: Aspect Ratio
22.5: Rim diameter code
154: Load index in single use
149: Load index in dual use
L: Speed Symbol

SPEED SYMBOL

Speed Symbol	Speed (km/h)
A1	5
A2	10
A3	15
A4	20
A5	25
A6	30
A7	35
A8	40
B	50
C	60
D	65
E	70
F	80
G	90
J	100
K	110
L	120
M	130
N	140
P	150
Q	160
R	170
S	180
T	190
U	200
H	210
V	240
W	270
Y	300
(Y)	above 300
Speed Category Marking	
ZR	above 240

LOAD INDEX

LI	kg	LI	kg	LI	kg	LI	kg	LI	kg	LI	kg	LI	kg
0	45	40	140	80	450	120	1,400	160	4,500	200	14,000	240	45,000
1	46.2	41	145	81	462	121	1,450	161	4,625	201	14,500	241	46,250
2	47.5	42	150	82	475	122	1,500	162	4,750	202	15,000	242	47,500
3	48.7	43	155	83	487	123	1,550	163	4,875	203	15,500	243	48,750
4	50	44	160	84	500	124	1,600	164	5,000	204	16,000	244	50,000
5	51.5	45	165	85	515	125	1,650	165	5,150	205	16,500	245	51,500
6	53	46	170	86	530	126	1,700	166	5,300	206	17,000	246	53,000
7	54.5	47	175	87	545	127	1,750	167	5,450	207	17,500	247	54,500
8	56	48	180	88	560	128	1,800	168	5,600	208	18,000	248	56,000
9	58	49	185	89	580	129	1,850	169	5,800	209	18,500	249	58,000
10	60	50	190	90	600	130	1,900	170	6,000	210	19,000	250	60,000
11	61.5	51	195	91	615	131	1,950	171	6,150	211	19,500	251	61,500
12	63	52	200	92	630	132	2,000	172	6,300	212	20,000	252	63,000
13	65	53	206	93	650	133	2,060	173	6,500	213	20,600	253	65,000
14	67	54	212	94	670	134	2,120	174	6,700	214	21,200	254	67,000
15	69	55	218	95	690	135	2,180	175	6,900	215	21,800	255	69,000
16	71	56	224	96	710	136	2,240	176	7,100	216	22,400	256	71,000
17	73	57	230	97	730	137	2,300	177	7,300	217	23,000	257	73,000
18	75	58	236	98	750	138	2,360	178	7,500	218	23,600	258	75,000
19	77.5	59	243	99	775	139	2,430	179	7,750	219	24,300	259	77,500
20	80	60	250	100	800	140	2,500	180	8,000	220	25,000	260	80,000
21	82.5	61	257	101	825	141	2,575	181	8,250	221	25,750	261	82,500
22	85	62	265	102	850	142	2,650	182	8,500	222	26,500	262	85,000
23	87.5	63	272	103	875	143	2,725	183	8,750	223	27,250	263	87,500
24	90	64	280	104	900	144	2,800	184	9,000	224	28,000	264	90,000
25	92.5	65	290	105	925	145	2,900	185	9,250	225	29,000	265	92,500
26	95	66	300	106	950	146	3,000	186	9,500	226	30,000	266	95,000
27	97.5	67	307	107	975	147	3,075	187	9,750	227	30,750	267	97,500
28	100	68	315	108	1,000	148	3,150	188	10,000	228	31,500	268	100,000
29	103	69	325	109	1,030	149	3,250	189	10,300	229	32,500	269	103,000
30	106	70	335	110	1,060	150	3,350	190	10,600	230	33,500	270	106,000
31	109	71	345	111	1,090	151	3,450	191	10,900	231	34,500	271	109,000
32	112	72	355	112	1,120	152	3,550	192	11,200	232	35,500	272	112,000
33	115	73	365	113	1,150	153	3,650	193	11,500	233	36,500	273	115,000
34	118	74	375	114	1,180	154	3,750	194	11,800	234	37,500	274	118,000
35	121	75	387	115	1,215	155	3,875	195	12,150	235	38,750	275	121,500
36	125	76	400	116	1,250	156	4,000	196	12,500	236	40,000	276	125,000
37	128	77	412	117	1,285	157	4,125	197	12,850	237	41,250	277	128,500
38	132	78	425	118	1,320	158	4,250	198	13,200	238	42,500	278	132,000
39	136	79	437	119	1,360	159	4,375	199	13,600	239	43,750	279	136,000

SEARCHING CLUE

Please refer to the following guidelines to find the tires you are looking for. For more details, separate guidelines are available in each category.

TT	Tube Type	WLT	Raised White Letter	XL	Extra Load
TL	Tubeless	BLT	Raised Black Letter	PR	Ply Rating
MFS	Maximum Flange Shield	OWL	Outlined White Letter		
E-No.	E Number	SL	White Slim Line		
RF	Reinforced	BLK	Black Sidewall		

NOTICE: All the information in this booklet is subject to change with or without notice.

PASSENGER CAR TIRE CONVERSION CHART

(THIS CHART DOES NOT IMPLY COMPLETE INTERCHANGEABILITY)

70 SERIES		65-60-55-50-45-40-35 SERIES						
Standard equipment size		Corresponding size						
		65SERIES	60SERIES	55SERIES	50SERIES	45SERIES	40SERIES	35SERIES
145/70R12	155/65R12	165/60R12	155/55R14					
	145/65R13	155/60R13						
155/70R12	155/65R13	165/60R13						
		165/60R13						
165/70R12	165/65R13	175/60R13	185/55R14					
		185/60R13						
175/70R12		185/60R13	185/55R14					
		195/60R13						
145/70R13	155/65R13	165/60R13	165/55R14	165/50R15				
	165/65R13	175/60R13						
155/70R13	165/65R13	175/60R13	185/55R14					
	155/65R14	195/60R13	165/55R15					
165/70R13	195/65R13	185/60R13	185/55R14	195/50R15	195/45R16			
	165/65R14	205/60R13	185/55R15					
175/70R13	195/65R13	195/60R13	195/55R14	195/50R15	205/45R16			
	175/65R14	205/60R13	205/50R15					
185/70R13	185/65R14	205/60R13	205/50R15					
	195/65R14	215/60R13	215/50R15					
165/70R14	195/65R13	185/60R13	185/55R14	195/50R15				
	165/65R14	205/60R13	185/55R15					
175/70R14	195/65R13	195/60R13	195/55R14	195/50R15	205/45R16			
	175/65R14	205/60R13	205/50R15					
185/70R14	185/65R14	205/60R13	205/50R15					
	195/65R14	215/60R13	215/50R15					
195/70R14	205/65R14	215/60R13	215/50R15					
	175/65R15	185/60R13	185/55R14	195/50R15				
185/70R14	185/65R15	205/60R13	205/50R15					
		215/60R13	215/50R15					
195/70R14	205/65R14	215/60R13	215/50R15					
	195/65R15	225/60R13	225/50R15					
205/70R14	215/65R14	225/60R13	225/50R15					
	205/65R15	235/60R13	235/50R15					
215/70R14	225/65R14	245/60R13	245/50R15					
	205/65R16	255/60R13	255/50R15					
225/70R14	215/65R15	225/60R13	225/50R15					
	225/65R16	235/60R13	235/50R15					
235/70R14	235/65R16	245/60R13	245/50R15					
	245/65R16	255/60R13	255/50R15					
245/70R14	255/65R16	265/60R13	265/50R15					
	265/65R16	275/60R13	275/50R15					
255/70R14	275/65R16	285/60R13	285/50R15					
	285/65R16	295/60R13	295/50R15					
265/70R14	295/65R16	305/60R13	305/50R15					
	305/65R16	315/60R13	315/50R15					
275/70R14	315/65R16	325/60R13	325/50R15					
	325/65R16	335/60R13	335/50R15					
285/70R14	335/65R16	345/60R13	345/50R15					
	345/65R16	355/60R13	355/50R15					
295/70R14	355/65R16	365/60R13	365/50R15					
	365/65R16	375/60R13	375/50R15					
305/70R14	375/65R16	385/60R13	385/50R15					
	385/65R16	395/60R13	395/50R15					
315/70R14	395/65R16	405/60R13	405/50R15					
	405/65R16	415/60R13	415/50R15					
325/70R14	415/65R16	425/60R13	425/50R15					
	425/65R16	435/60R13	435/50R15					
335/70R14	435/65R16	445/60R13	445/50R15					
	445/65R16	455/60R13	455/50R15					
345/70R14	455/65R16	465/60R13	465/50R15					
	465/65R16	475/60R13	475/50R15					
355/70R14	475/65R16	485/60R13	485/50R15					
	485/65R16	495/60R13	495/50R15					
365/70R14	495/65R16	505/60R13	505/50R15					
	505/65R16	515/60R13	515/50R15					
375/70R14	515/65R16	525/60R13	525/50R15					
	525/65R16	535/60R13	535/50R15					
385/70R14	535/65R16	545/60R13	545/50R15					
	545/65R16	555/60R13	555/50R15					
395/70R14	555/65R16	565/60R13	565/50R15					
	565/65R16	575/60R13	575/50R15					
405/70R14	575/65R16	585/60R13	585/50R15					
	585/65R16	595/60R13	595/50R15					
415/70R14	595/65R16	605/60R13	605/50R15					
	605/65R16	615/60R13	615/50R15					
425/70R14	615/65R16	625/60R13	625/50R15					
	625/65R16	635/60R13	635/50R15					
435/70R14	635/65R16	645/60R13	645/50R15					
	645/65R16	655/60R13	655/50R15					
445/70R14	655/65R16	665/60R13	665/50R15					
	665/65R16	675/60R13	675/50R15					
455/70R14	675/65R16	685/60R13	685/50R15					
	685/65R16	695/60R13	695/50R15					
465/70R14	695/65R16	705/60R13	705/50R15					
	705/65R16	715/60R13	715/50R15					
475/70R14	715/65R16	725/60R13	725/50R15					
	725/65R16	735/60R13	735/50R15					
485/70R14	735/65R16	745/60R13	745/50R15					
	745/65R16	755/60R13	755/50R15					
495/70R14	755/65R16	765/60R13	765/50R15					
	765/65R16	775/60R13	775/50R15					
505/70R14	775/65R16	785/60R13	785/50R15					
	785/65R16	795/60R13	795/50R15					
515/70R14	795/65R16	805/60R13	805/50R15					
	805/65R16	815/60R13	815/50R15					
525/70R14	815/65R16	825/60R13	825/50R15					
	825/65R16	835/60R13	835/50R15					
535/70R14	835/65R16	845/60R13	845/50R15					
	845/65R16	855/60R13	855/50R15					
545/70R14	855/65R16	865/60R13	865/50R15					
	865/65R16	875/60R13	875/50R15					
555/70R14	875/65R16	885/60R13	885/50R15					
	885/65R16	895/60R13	895/50R15					
565/70R14	895/65R16	905/60R13	905/50R15					
	905/65R16	915/60R13	915/50R15					
575/70R14	915/65R16	925/60R13	925/50R15					
	925/65R16	935/60R13	935/50R15					
585/70R14	935/65R16	945/60R13	945/50R15					
	945/65R16	955/60R13	955/50R15					
595/70R14	955/65R16	965/60R13	965/50R15					
	965/65R16	975/60R13	975/50R15					
605/70R14	975/65R16	985/60R13	985/50R15					
	985/65R16	995/60R13	995/50R15					
615/70R14	995/65R16	1005/60R13	1005/50R15					
	1005/65R16	1015/60R13	1015/50R15					
625/70R14	1015/65R16	1025/60R13	1025/50R15					
	1025/65R16	1035/60R13	1035/50R15					
635/70R14	1035/65R16	1045/60R13	1045/50R15					
	1045/65R16	1055/60R13	1055/50R15					
645/70R14	1055/65R16	1065/60R13	1065/50R15					
	1065/65R16	1075/60R13	1075/50R15					
655/70R14	1075/65R16	1085/60R13	1085/50R15					
	1085/65R16	1095/60R13	1095/50R15					
665/70R14	1095/65R16	1105/60R13	1105/50R15					
	1105/65R16	1115/60R13	1115/50R15					
675/70R14	1115/65R16	1125/60R13	1125/50R15					
	1125/65R16	1135/60R13	1135/50R15					
685/70R14	1135/65R16	1145/60R13	1145/50R15					
	1145/65R16	1155/60R13	1155/50R15					
695/70R14	1155/65R16	1165/60R13	1165/50R15					
	1165/65R16	1175/60R13	1175/50R15					
705/70R14	1175/65R16	1185/60R13	1185/50R15					
	1185/65R16	1195/60R13	1195/50R15					
715/70R14	1195/65R16	1205/60R13	1205/50R15					
	1205/65R16	1215/60R13	1215/50R15					
725/70R14	1215/65R16	1225/60R13	1225/50R15					
	1225/65R16	1235/60R13	1235/50R15					
735/70R14	1235/65R16	1245/60R13	1245/50R15					
	1245/65R16	1255/60R13	1255/50R15					
745/70R14	1255/65R16	1265/60R13	1265/50R15					
	1265/65R16	1275/60R13	1275/50R15					
755/70R14	1275/65R16	1285/60R13	1285/50R15					
	1285/65R16	1295/60R13	1295/50R15					
765/70R14	1295/65R16	1305/60R13	1305/50R15					
	1305/65R16	1315/60R13	1315/50R15					
775/70R14	1315/65R16	1325/60R13	1325/50R15					
	1325/65R16	1335/60R13						

FALKEN

PASSENGER CAR TIRES



This is just a sample image.

PASSENGER CAR TIRES

SAFETY WARNING

SERIOUS INJURY OR DEATH MAY RESULT FROM EXPLOSION OF TIRE/RIM ASSEMBLY IF PROPER MOUNTING INSTRUCTIONS ARE NOT FOLLOWED.

- ***ONLY** specially trained persons should mount tires.
- ***ALWAYS** match rim diameter with appropriate tire size.
- ***NEVER** mount a tire on a cracked, bent, rusted or otherwise damaged rim or a rim which has been repaired.
- ***NEVER** put a flammable substance into a tire.
- ***ALWAYS** clean and lubricate the rim and tire beads.
- ***ALWAYS** use an extension air hose with gauge and clip-on air chuck.
- ***ALWAYS** lock the wheel on the tire mounting machine, or place it in a safety cage when inflating.
- ***ALWAYS** stand clear, and **NEVER** lean or reach over the tire/rim assembly when inflating.
- ***NEVER** inflate over 40 psi (275 kPa) to seat beads.
- ***ALWAYS** adjust tire pressure to the vehicle manufacturer's recommendations after beads are fully seated.

CHARACTERISTICS OF PATTERNS

Sporty, High Speed	FK510	FK453	FK452	RT615K+		
Sporty and Comfort	ZE912	ZE914 ECORUN		FK07E	FK07U	
Comfort	SN828	SN816	SN807	SN832i	SN832 ECORUN	FK07J



 50/55/60/65/70/80 Series

SERIES	SIZE		LI		FK510	FK453	PT722 A/S	FK452	ZE912	ZE914EC	SN828	SN814	SN807	SN832i	SN832EC	RT415K+	FK07J	FK07E	FK07U
			St'd	Reinf															
50	165/50	R15	72	76															
	175/50	R15	75							75H					72H				
	195/50	R15	82	86					82H,V	82V					75H				
	205/50	R15	86	89					86H,V	86V						89W			
	225/50	R15	91	95					91V										
	185/50	R16	81	-						81V									
	195/50	R16	84	88					84V	88V					84H				
	205/50	R16	87	91				ZR 87W	87V	87V					87H				
	215/50	R16	90	94					90V										
	225/50	R16	92	96			92V	ZR 92W	96V	96W						92W			
	245/50	R16	97	-					97H										
	205/50	R17	89	93					ZR 93Y	93V	ZR 93W	93W							
	215/50	R17	91	95					ZR 91W	95V	91V	91W							
	225/50	R17	94	98					RF 94W,ZR 94W	94V	94V,W	94W,RF 94W							
	235/50	R17	96	100					ZR 100W	96V	ZR 96W	96W							
	225/50	R18	95	99					ZR 95W	95V	95W								
	235/50	R18	97	101					ZR 101W	101V	ZR 101W	101W							
	245/50	R18	100	104				ZR 104Y	RF 100Y	100V									
	255/50	R19	103	107															
	265/50	R19	106	110															
245/50	R20	-																	
255/50	R20	105	109																
55	165/55	R14	72	-					72V						72T				
	185/55	R14	80	-					80H	80H									
	165/55	R15	75	-					75V										
	175/55	R15	77	-															
	185/55	R15	82	86					82V	82H,86V					82H				
	195/55	R15	85	89					85V	85H,V					85H				
	205/55	R15	88						88V	88V									
	185/55	R16	83	87					83V	83V									
	195/55	R16	87	91					87V	87V,RF 87W						87H			
	205/55	R16	91	94				91V	91V	91V,RF 91W					91H				
	215/55	R16	93	97			91V	97V	ZR 93W	97V	93V,W,77V								
	225/55	R16	95	99				95V	ZR 95W	95V	95V,99W								
	205/55	R17	91	95						91V,RF 91W									
	215/55	R17	94	98						ZR 94W	94W								
	225/55	R17	97	101				101W	97V	ZR 101W	101W								
	235/55	R17	99	103				ZR 103W	99V	ZR 99W	99W								
	245/55	R17	102	106															
	215/55	R18	95	99					95V	95H	95H								
	225/55	R18	98	102						98H	98H								
	235/55	R18								100V	100V								
245/55	ZR18	100	104					ZR 103W											
255/55	R18	105	109						109V	109V									
225/55	R19	99	103					99V											
235/55	R19	101	105						105W										
245/55	R19	-							103H										
255/55	R19	107	111																
60	165/60	R12	71	-					71H	71H					73T				
	165/60	R13	73	-															
	175/60	R13	77	-					77H										
	185/60	R13	80	-					80H	80H									
	205/60	R13	86	-					86H										
	165/60	R14	75	79					75H	75H					75T	79T			
	175/60	R14	79	83					79H	79H									
	185/60	R14	82	86					82H	82H					82H	82T			
	195/60	R14	86	-					86H								86H		
	205/60	R14	88	-					88H										
	155/60	R15	74	-												74T			
	165/60	R15	77	81												77T			
	175/60	R15	81	-					81H	81H									
	185/60	R15	84	88					84H,88H	84H,88H									
	195/60	R15	88	92					88H,V	88H,V					84H				
	205/60	R15	91	95					91H,V	91H,V					88H				
	215/60	R15	94	98					94H						91H				
	225/60	R15	96	-					96H,W	96W									
	195/60	R16	89	93						89V									
	205/60	R16	92	96					92H	92H,96V					92H				
215/60	R16	95	99					99H	99H,95V					95H					
225/60	R16	98	102				98W	98H,W	98W										
235/60	R16	100	104					ZR 100W	100W										
215/60	R17	96	100					96H	96H										
225/60	R17	99	103			96V		99H	99H,V										
235/60	R17	102	106			99V		102H	102H										
255/60	R17	106	110					106H											
225/60	R18	100	104					100H	100H										
235/60	R18	103	107					107V	107V										
245/60	R18	105	109					105H											
255/60	R18	108	112					112V											
265/60	R18	110	114					110V											
255/60	R19	109	113					108H	110V										
65	155/65	R13	73	-						73T					77T				
	165/65	R13	77	-						77T									
	175/65	R13	80	-						80T									
	155/65	R14	75	79						75T									
	165/65	R14	79	83						79T									
	175/65	R14	82	86					82H	82H	82T,86T								
	185/65	R14	86	90					86H	86H	86T								
	195/65	R14	89	93					89H		89 T								
	145/65	R15	72	-															
	165/65	R15	81	-						81H									
	175/65	R15	84	88					84H	84H									
	185/65	R15	88	92					88H	88H	88T								
	195/65	R15	91	95					91H,V	91H,V	91T,95T								
	205/65	R15	94	99					94H,V	94H	94T								
	215/65	R15	96	100					96H	96H	96T								
	205/65	R16	95	99					95V	95V									
	215/65	R16	98	102					98H	98H									
	225/65	R16	100	104					100H										
	235/65	R16	103	107					103H										
	225/65	R17	102	106					102H		102V								
235/65	R17	104	108					108V	108V										
235/65	R18	106	110					106H	106H										
255/65	R18	111	115					109H											
70	165/70	R10	-																
	145/70	R12	69	-							69S								
	155/70	R12	73	-							73S				73T				
	165/70	R12	77	-															
	145/70	R13	71	-							71T								
	155/70	R13	75	-							75T								
	165/70	R13	79	83							79T				75T	79T			
	175/70	R13	82	86							82T				82T	82T			
	185/70	R13	86	91							86T								
	165/70	R14	81	85							81T,85T				81T				
	175/70	R14	84	88															



AZENIS FK510

- Falken's latest generation most high performance summer tire, the AZENIS FK510 is designed for drivers of premium vehicles looking for excellent grip and outstanding performance.
- 4D Nano Design enables Falken engineers to optimize new high-performance compounds at the molecular level, enhancing both wear and wet weather traction.
- Featuring hybrid undertread materials, the FK510 delivers inspire confidence handling and stability.



AZENIS FK453

- FALKEN flagship tire for more grip and driving pleasure without compromising driving comfort.
- To achieve high speed handling and stability,new Falken high loaded silica hard tread compound has been adopted.
- 3 wide straight grooves evacuate water effectively.
- Low noise and good handling and stability are achieved by optimized land/sea ratio.

AZENIS FK453



Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
255 /30 ZR19	(91Y)	○	TL	○	○	637	263	9.0	8.5 - 9.5	7.7
265 /30 ZR19	(93Y)	○	TL	○	○	643	275	9.5	9.0 -10.0	7.5
275 /30 ZR19	(96Y)	○	TL	○	○	649	282	9.5	9.0 -10.0	7.5
295 /30 ZR19	100Y	○	TL	○		663	306	10.5	10.0 -11.0	7.5
245 /30 ZR20	(90Y)	○	TL	○	○	656	251	8.5	8.0 - 9.0	7.8
255 /30 ZR20	(92Y)	○	TL	○	○	662	263	9.0	8.5 - 9.5	7.7
275 /30 ZR20	(97Y)	○	TL	○	○	674	282	9.5	9.0 -10.0	7.5
285 /30 ZR20	(99Y)	○	TL	○	○	680	295	10.0	9.5 -10.5	7.3
225 /35 ZR18	(87Y)	○	TL	○	○	615	232	8.0	7.5 - 9.0	7.9
245 /35 ZR18	92Y	○	TL	○	○	629	251	8.5	8.0 - 9.5	7.8
255 /35 ZR18	(94Y)	○	TL	○	○	637	263	9.0	8.5 -10.0	7.8
265 /35 ZR18	(97Y)	○	TL	○	○	645	275	9.5	9.0 -10.5	7.6
275 /35 ZR18	(99Y)	○	TL	○	○	651	282	9.5	9.0 -11.0	7.6
285 /35 ZR18	(101Y)	○	TL	○	○	659	295	10.0	9.5 -11.0	7.4
225 /35 ZR19	(88Y)	○	TL	○	○	641	232	8.0	7.5 - 9.0	7.8
235 /35 ZR19	(91Y)	○	TL	○	○	647	244	8.5	8.0 - 9.5	7.9
245 /35 ZR19	(93Y)	○	TL	○	○	655	251	8.5	8.0 - 9.5	7.8
255 /35 ZR19	(96Y)	○	TL	○	○	663	263	9.0	8.5 -10.0	7.8
265 /35 ZR19	(98Y)	○	TL	○	○	671	275	9.5	9.0 -10.5	7.6
245 /35 ZR20	(95Y)	○	TL	○	○	680	251	8.5	8.0 - 9.5	7.8
255 /35 ZR20	(97Y)	○	TL	○	○	688	263	9.0	8.5 -10.0	7.8
275 /35 ZR20	(102Y)	○	TL	○	○	702	282	9.5	9.0 -11.0	7.6
245 /40 ZR17	95Y	○	TL	○	○	630	251	8.5	8.0 - 9.5	7.9
225 /40 ZR18	(92Y)	○	TL	○	○	639	232	8.0	7.5 - 9.0	8.0
235 /40 ZR18	(95Y)	○	TL	○	○	647	244	8.5	8.0 - 9.5	8.0
245 /40 ZR18	(97Y)	○	TL	○	○	655	251	8.5	8.0 - 9.5	8.0
255 /40 ZR18	(99Y)	○	TL	○	○	663	263	9.0	8.5 -10.0	7.9
275 /40 ZR18	99Y	○	TL	○	○	679	282	9.5	9.0 -11.0	7.7
225 /40 ZR19	(93Y)	○	TL	○	○	665	232	8.0	7.5 - 9.0	7.9
235 /40 ZR19	(96Y)	○	TL	○	○	673	244	8.5	8.0 - 9.5	7.9
245 /40 ZR19	(98Y)	○	TL	○	○	681	251	8.5	8.0 - 9.5	7.9
255 /40 ZR19	(100Y)	○	TL	○	○	689	263	9.0	8.5 -10.0	7.9
275 /40 ZR19	(105Y)	○	TL	○	○	705	282	9.5	9.0 -11.0	7.7
245 /40 ZR20	(99Y)	○	TL	○	○	706	251	8.5	8.0 - 9.5	7.9
215 /45 ZR17	91Y	○	TL	○	○	628	215	7.0	7.0 - 8.0	7.9
225 /45 ZR17	94Y	○	TL	○	○	636	227	7.5	7.0 - 8.5	8.0
235 /45 ZR17	97Y	○	TL	○	○	646	238	8.0	7.5 - 9.0	7.9
245 /45 ZR17	99Y	○	TL	○	○	654	246	8.0	7.5 - 9.0	7.9
225 /45 ZR18	(95Y)	○	TL	○	○	661	227	7.5	7.0 - 8.5	8.0
235 /45 ZR18	(98Y)	○	TL	○	○	671	238	8.0	7.5 - 9.0	7.9
245 /45 ZR18	(100Y)	○	TL	○	○	679	246	8.0	7.5 - 9.0	8.0
255 /45 ZR18	103Y	○	TL	○	○	691	258	8.5	8.0 - 9.5	7.9
225 /45 ZR19	96Y	○	TL	○	○	687	227	7.5	7.0 - 8.5	7.9
235 /45 ZR19	99Y	○	TL	○	○	697	238	8.0	7.5 - 9.0	7.9
245 /45 ZR19	(102Y)	○	TL	○	○	705	246	8.0	7.5 - 9.0	7.9
245 /45 ZR20	103Y	○	TL	○	○	730	246	8.0	7.5 - 9.0	7.9
255 /45 ZR20	105Y	○	TL	○		742	258	8.5	8.0 - 9.5	7.9
225 /50 ZR17	98Y	○	TL	○	○	662	235	7.0	6.0 - 8.0	8.0
245 /50 ZR18	104Y	○	TL	○	○	707	256	7.5	7.0 - 8.5	7.9
235 /55 ZR19	105Y	○	TL	○	○	745	248	7.5	6.5 - 8.5	7.9

Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
285 /25 ZR20	93Y	○	TL	○	○	650	289	10.5	10.5	7.3
295 /25 ZR20	(95Y)	○	TL	○	○	658	297	10.5	10.0 - 11.0	7.3
295 /25 ZR22	97Y	○	TL	○	○	709	297	10.5	10.0 - 11.0	7.3
295 /30 ZR18	98Y	○	TL	○	○	635	300	10.5	10.0 - 11.0	7.3
245 /30 ZR19	89Y	○	TL	○	○	632	247	8.5	8.0 - 9.0	7.7
255 /30 ZR19	91Y	○	TL	○	○	637	259	9.0	8.5 - 9.5	7.7
255 /30 ZR19	91W	○	TL	○		636	259	9.0	8.5 - 9.5	7.6
265 /30 ZR19	(93Y)	○	TL	○	○	645	271	9.5	9.0 - 10.0	7.5
265 /30 ZR19	93W	○	TL	○		642	270	9.5	9.0 - 10.0	7.4
275 /30 ZR19	(96Y)	○	TL	○	○	650	278	9.5	9.0 - 10.0	7.5
275 /30 ZR19	96W	○	TL	○		650	274	9.5	9.0 - 10.0	7.4
285 /30 ZR19	98Y	○	TL	○	○	656	291	10.0	9.5 - 10.5	7.3
295 /30 ZR19	(100Y)	○	TL	○	○	661	300	10.5	10.0 - 11.0	6.5
295 /30 ZR19	100W	○	TL	○		661	301	10.5	10.0 - 11.0	7.2
305 /30 ZR19	(102Y)	○	TL	○	○	667	311	11.0	10.5 - 11.5	7.1
225 /30 ZR20	85Y	○	TL	○	○	646	229	8.0	8.0	7.7
235 /30 ZR20	(88Y)	○	TL	○	○	651	240	8.5	8.5	7.7
245 /30 ZR20	(90Y)	○	TL	○	○	657	247	8.5	8.0 - 9.0	7.7
255 /30 ZR20	92Y	○	TL	○	○	662	259	9.0	8.5 - 9.5	7.7
275 /30 ZR20	97Y	○	TL	○	○	675	278	9.5	9.0 - 10.0	7.5
275 /30 ZR20	97W	○	TL	○		674	276	9.5	9.0 - 10.0	7.4
285 /30 ZR20	99Y	○	TL	○	○	681	291	10.0	9.5 - 10.5	7.3
285 /30 ZR20	99W	○	TL	○		678	289	10.0	9.5 - 10.5	7.2
245 /30 ZR22	92Y	○	TL	○	○	708	247	8.5	8.0 - 9.0	7.7
255 /30 ZR22	95Y	○	TL	○	○	713	259	9.0	8.5 - 9.5	7.7
215 /35 ZR18	84Y	○	TL	○	○	607	221	7.5	7.0 - 8.5	7.9
225 /35 ZR18	87Y	○	TL	○	○	616	232	8.0	7.5 - 9.0	7.9
245 /35 ZR18	92Y	○	TL	○	○	629	251	8.5	8.0 - 9.5	7.9
245 /35 ZR18	92W	○	TL	○		626	252	8.5	8.0 - 9.5	7.8
255 /35 ZR18	94Y	○	TL	○	○	635	260	9.0	8.5 - 10.0	7.9
255 /35 ZR18	94W	○	TL	○		634	262	9.0	8.5 - 10.0	7.8
265 /35 ZR18	(97Y)	○	TL	○	○	643	272	9.5	9.0 - 10.5	7.7
265 /35 ZR18	97W	○	TL	○		642	274	9.5	9.0 - 10.5	7.6
275 /35 ZR18	99Y	○	TL	○	○	650	278	9.5	9.0 - 11.0	7.7
275 /35 ZR18	99W	○	TL	○		646	282	9.5	9.0 - 11.0	7.6
285 /35 ZR18	101Y	○	TL	○	○	657	292	10.0	9.5 - 11.0	7.5
285 /35 ZR18	101W	○	TL	○		655	294	10.0	9.5 - 11.0	7.4
215 /35 ZR19	85Y	○	TL	○	○	633	221	7.5	7.0 - 8.5	7.9
225 /35 ZR19	88Y	○	TL	○	○	642	232	8.0	7.5 - 9.0	7.9
235 /35 ZR19	(91Y)	○	TL	○	○	647	244	8.5	8.0 - 9.5	7.9
235 /35 ZR19	91W	○	TL	○		647	242	8.5	8.0 - 9.5	7.8
245 /35 ZR19	(93Y)	○	TL	○	○	655	251	8.5	8.0 - 9.5	7.9
245 /35 ZR19	93W	○	TL	○		655	251	8.5	8.0 - 9.5	7.8
255 /35 RF19	92Y		TL	○	○	661	260	9.0	8.5 - 10.0	7.7
255 /35 ZR19	(96Y)	○	TL	○	○	661	263	9.0	8.5 - 10.0	7.9
265 /35 ZR19	98Y	○	TL	○	○	669	272	9.5	9.0 - 10.5	7.7
275 /35 RF19	96Y		TL	○	○	675	278	9.5	9.0 - 11.0	7.7
275 /35 ZR19	(100Y)	○	TL	○	○	676	278	9.5	9.0 - 11.0	7.7
275 /35 ZR19	100W	○	TL	○		674	279	9.5	9.0 - 11.0	7.6

Continued next page.



AZENIS FK453

Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
285 /35 ZR19	[99Y]	○	TL	○	○	683	292	10.0	9.5 - 11.0	7.5
245 /35 ZR20	95Y	○	TL	○	○	680	251	8.5	8.0 - 9.5	7.9
245 /35 ZR20	95W	○	TL	○		683	249	8.5	8.0 - 9.5	7.8
255 /35 ZR20	97Y	○	TL	○	○	686	260	9.0	8.5 - 10.0	7.9
275 /35 ZR20	102Y	○	TL	○	○	701	278	9.5	9.0 - 11.0	7.7
275 /35 ZR20	102W	○	TL	○		701	280	9.5	9.0 - 11.0	7.6
205 /40 ZR17	84W	○	TL	○	○	596	210	7.5	7.0 - 8.0	7.9
235 /40 ZR17	94Y	○	TL	○	○	621	243	8.5	8.0 - 9.5	7.9
245 /40 ZR17	95Y	○	TL	○	○	628	251	8.5	8.0 - 9.5	7.9
245 /40 ZR17	95W	○	TL	○		625	254	8.5	8.0 - 9.5	7.8
255 /40 ZR17	98Y	○	TL	○	○	636	263	9.0	8.5 - 10.0	7.9
255 /40 ZR17	98W	○	TL	○		634	266	9.0	8.5 - 10.0	7.8
265 /40 ZR17	100Y	○	TL	○	○	644	272	9.5	9.0 - 10.5	7.7
275 /40 ZR17	98Y		TL	○	○	652	281	9.5	9.0 - 11.0	7.7
215 /40 ZR18	89Y	○	TL	○	○	629	220	7.5	7.0 - 8.5	7.9
225 /40 ZR18	92Y	○	TL	○	○	637	234	8.0	7.5 - 9.0	7.9
235 /40 ZR18	[95Y]	○	TL	○	○	646	243	8.5	8.0 - 9.5	7.9
235 /40 ZR18	95W	○	TL	○		644	246	8.5	8.0 - 9.5	7.8
245 /40 ZR18	[97Y]	○	TL	○	○	653	251	8.5	8.0 - 9.5	7.9
245 /40 ZR18	97W	○	TL	○		651	253	8.5	8.0 - 9.5	7.8
255 /40 RF18	95Y		TL	○	○	661	260	9.0	8.5 - 10.0	7.7
255 /40 ZR18	[99Y]	○	TL	○	○	661	263	9.0	8.5 - 10.0	7.9
265 /40 ZR18	[101Y]	○	TL	○	○	669	272	9.5	9.0 - 10.5	7.7
275 /40 ZR18	99Y		TL	○	○	677	281	9.5	9.0 - 11.0	7.7
275 /40 ZR18	99W		TL	○		675	283	9.5	9.0 - 11.0	7.6
275 /40 RF18	99Y		TL	○	○	677	278	9.5	9.0 - 11.0	7.7
225 /40 RF19	89Y		TL	○	○	663	230	8.0	7.5 - 9.0	7.7
225 /40 ZR19	93Y	○	TL	○		663	233	8.0	7.5 - 9.0	7.9
235 /40 ZR19	96Y	○	TL	○	○	671	244	8.5	8.0 - 9.5	7.9
245 /40 ZR19	98Y	○	TL	○	○	679	251	8.5	8.0 - 9.5	7.9
245 /40 ZR19	98W	○	TL	○		677	254	8.5	8.0 - 9.5	7.8
245 /40 RF19	94Y		TL	○	○	679	248	8.5	8.0 - 9.5	7.7
255 /40 ZR19	100Y	○	TL	○	○	687	263	9.0	8.5 - 10.0	7.9
275 /40 ZR19	101Y		TL	○	○	703	281	9.5	9.0 - 11.0	7.7
275 /40 ZR19	101W		TL	○		701	282	9.5	9.0 - 11.0	7.6
245 /40 ZR20	99Y	○	TL	○	○	704	251	8.5	8.0 - 9.5	7.9
245 /40 ZR20	99W	○	TL	○		704	253	8.5	8.0 - 9.5	7.8
275 /40 ZR20	106Y	○	TL	○		728	281	9.5	9.0 - 11.0	7.7
215 /45 ZR17	91Y	○	TL	○	○	627	215	7.0	7.0 - 8.0	7.9
215 /45 ZR17	91W	○	TL	○		625	217	7.0	7.0 - 8.0	7.8
225 /45 ZR17	94Y	○	TL	○	○	636	229	7.5	7.0 - 8.5	7.9
225 /45 ZR17	94W	○	TL	○		632	230	7.5	7.0 - 8.5	8.2
235 /45 ZR17	97Y	○	TL	○	○	642	240	8.0	7.5 - 9.0	7.9
235 /45 ZR17	97W	○	TL	○		643	244	8.0	7.5 - 9.0	7.8
245 /45 ZR17	99Y	○	TL	○	○	653	246	8.0	7.5 - 9.0	7.9
215 /45 ZR18	93Y	○	TL	○	○	652	215	7.0	7.0 - 8.0	7.9
215 /45 ZR18	93W	○	TL	○		651	217	7.0	7.0 - 8.0	7.8
225 /45 RF18	91Y		TL	○	○	659	225	7.5	7.0 - 8.5	7.7
225 /45 ZR18	95Y	○	TL	○	○	661	228	7.5	7.0 - 8.5	7.9
225 /45 ZR18	95W	○	TL	○		657	231	7.5	7.0 - 8.5	7.8



AZENIS FK453

Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
235 /45 ZR18	98Y	○	TL	○	○	667	240	8.0	7.5 - 9.0	7.9
235 /45 ZR18	98W	○	TL	○		668	243	8.0	7.5 - 9.0	7.8
245 /45 RF18	96Y		TL	○	○	677	243	8.0	7.5 - 9.0	7.7
245 /45 ZR18	100Y	○	TL	○	○	678	246	8.0	7.5 - 9.0	7.9
245 /45 ZR18	100W	○	TL	○		675	249	8.0	7.5 - 9.0	7.8
255 /45 ZR18	103Y	○	TL	○	○	687	257	8.5	8.0 - 9.5	7.9
225 /45 ZR19	96Y	○	TL	○	○	687	228	7.5	7.0 - 8.5	7.9
225 /45 ZR19	96W	○	TL	○		687	228	7.5	7.0 - 8.5	7.8
245 /45 ZR19	102Y	○	TL	○	○	704	246	8.0	7.5 - 9.0	7.9
245 /45 ZR19	102W	○	TL	○		703	248	8.0	7.5 - 9.0	7.8
245 /45 ZR20	103Y	○	TL	○		728	246	8.0	7.5 - 9.0	7.9
255 /45 ZR20	105Y	○	TL	○	○	738	257	8.5	8.0 - 9.5	7.9
255 /45 ZR20	105W	○	TL	○		737	262	8.5	8.0 - 9.5	7.8
205 /50 ZR17	93Y	○	TL	○	○	639	215	6.5	5.5 - 7.5	7.9
215 /50 ZR17	91W		TL	○	○	649	228	7.0	6.0 - 7.5	7.9
225 /50 RF17	94Y		TL	○	○	658	233	7.0	6.0 - 8.0	7.7
225 /50 ZR17	98Y	○	TL	○	○	660	235	7.0	6.0 - 8.0	7.9
225 /50 ZR17	98W	○	TL	○		660	234	7.0	6.0 - 8.0	7.8
235 /50 ZR17	100W	○	TL	○	○	669	248	7.5	6.5 - 8.5	7.9
225 /50 ZR18	95W		TL	○		683	236	7.0	6.0 - 8.0	7.9
235 /50 ZR18	101W	○	TL	○	○	693	248	7.5	6.5 - 8.5	7.9
245 /50 RF18	100Y		TL	○	○	703	253	7.5	7.0 - 8.5	7.7
225 /55 R17	101W	○	TL	○	○	682	236	7.0	6.0 - 8.0	7.9
235 /55 ZR17	103W	○	TL	○	○	691	243	7.5	6.5 - 8.5	7.9



AZENIS PT722 A/S

- FALKEN'S ultra high performance all-season touring tire.
- Deep tread depth and long lateral grooves.



FK452

- FALKEN tire, featuring directional tread design and modern appearance for high performance cars.
- Precise handling and high stability at high speed.
- Special silica compound for excellent wet performance.
- Low noise under various conditions.



FK452

Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width [code]		Tread Depth (mm)
								Measuring	Approved	
275 /30 ZR 19	96W	○	TL	○		650	269	9.5	9.0 -10.0	7.9
275 /30 ZR 20	97W	○	TL	○		678	267	9.5	9.0 -10.0	7.9
255 /35 ZR 18	94Y	○	TL	○		635	263	9.0	8.5 -10.0	7.6
235 /35 R 19	91W	○	TL	○		649	240	8.5	8.0 - 9.5	8.3
245 /35 ZR 19	93W	○	TL	○		655	244	8.5	8.0 - 9.5	7.9
255 /35 ZR 19	96Y	○	TL	○		661	263	9.0	8.5 -10.0	7.6
245 /35 R 20	95W	○	TL	○		683	243	8.5	8.0 - 9.5	8.3
255 /35 ZR 20	97W	○	TL	○		691	257	9.0	8.5 -10.0	7.9
275 /35 ZR 20	102W	○	TL	○		704	269	9.5	9.0 -11.0	7.9
225 /40 ZR 18	92W	○	TL	○		635	231	8.0	7.5 - 9.0	7.9
235 /40 R 18	95V	○	TL	○		645	241	8.5	8.0 - 9.5	8.7
255 /40 ZR 19	100Y	○	TL	○		687	263	9.0	8.5 -10.0	7.6
275 /40 ZR 19	101W		TL	○		701	274	9.5	9.0 -11.0	7.9
275 /40 ZR 20	106Y	○	TL	○		728	281	9.5	9.0 -11.0	7.4
215 /45 R 17	91V	○	TL	○		625	213	7.0	7.0 - 8.0	8.7
235 /45 R 17	94V		TL	○		645	239	8.0	7.5 - 9.0	8.7
245 /45 R 17	95V		TL	○		653	244	8.0	7.5 - 9.0	8.7
255 /45 R 17	98V		TL	○		660	257	8.5	8.0 - 9.5	8.7
245 /45 R 18	100V	○	TL	○		677	246	8.0	7.5 - 9.0	8.7
255 /45 R 18	99V		TL	○		683	257	8.5	8.0 - 9.5	8.7
245 /45 ZR 19	98W		TL	○		704	241	8.0	7.5 - 9.0	7.9
255 /45 ZR 19	104Y	○	TL	○		713	258	8.5	8.0 - 9.5	7.6
245 /45 ZR 20	99W		TL	○		729	241	8.0	7.5 - 9.0	7.9
255 /45 ZR 20	105Y	○	TL	○		738	258	8.5	8.0 - 9.5	7.6
225 /50 R 16	92V		TL	○		632	231	7.0	6.0 - 8.0	8.7
205 /50 R 17	93V	○	TL	○		640	211	6.5	5.5 - 7.5	8.7
215 /50 R 17	95V	○	TL	○		650	224	7.0	6.0 - 7.5	8.7
225 /50 R 17	94V		TL	○		658	231	7.0	6.0 - 8.0	8.7
235 /50 R 17	96V		TL	○		668	244	7.5	6.5 - 8.5	8.7
225 /50 R 18	95V		TL	○		686	229	7.0	6.0 - 8.0	8.7
235 /50 R 18	101V	○	TL	○		696	244	7.5	6.5 - 8.5	8.7
245 /50 R 18	100V		TL	○		706	249	7.5	7.0 - 8.5	8.7
205 /55 R 16	91V		TL	○		632	211	6.5	5.5 - 7.5	8.7
215 /55 R 16	97V	○	TL	○		640	224	7.0	6.0 - 7.5	8.7
225 /55 R 16	95V		TL	○		653	226	7.0	6.0 - 8.0	8.7
215 /55 R 17	94V		TL	○		668	224	7.0	6.0 - 7.5	8.7
225 /55 R 17	97V		TL	○		678	229	7.0	6.0 - 8.0	8.7
235 /55 R 17	99V		TL	○		688	239	7.5	6.5 - 8.5	8.7
215 /55 R 18	95V		TL	○		693	226	7.0	6.0 - 7.5	8.3
245 /55 ZR 18	103W		TL	○		727	253	7.5	7.0 - 8.5	8.0
225 /55 R 19	99V		TL	○		731	233	7.0	6.0 - 8.0	8.0
215 /60 R 17	96V		TL			690	221	6.5	6.0 - 7.5	8.3
225 /60 R 17	99V		TL			702	228	6.5	6.0 - 8.0	8.4

Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width [code]		Tread Depth (mm)
								Measuring	Approved	
305 /25 ZR 20	97Y	○	TL	○	○	661	306	11.0	10.5 - 11.5	7.9
295 /25 ZR 21	96Y	○	TL	○	○	683	293	10.5	10.0 - 11.0	7.9
285 /25 ZR 22	95Y	○	TL	○	○	702	290	10.5	10.5	7.9
265 /30 ZR 19	93Y	○	TL	○	○	645	264	9.5	9.0 - 10.0	7.9
275 /30 ZR 19	96Y	○	TL	○	○	651	267	9.5	9.0 - 10.0	7.9
225 /30 ZR 20	85Y	○	TL	○	○	644	229	8.0	8.0	8.1
235 /30 ZR 20	88Y	○	TL	○	○	651	240	8.5	8.5	8.1
245 /30 ZR 20	90Y	○	TL	○	○	655	243	8.5	8.0 - 9.0	8.1
255 /30 ZR 20	92Y	○	TL	○	○	661	255	9.0	8.5 - 9.5	7.9
275 /30 ZR 20	97Y	○	TL	○	○	675	267	9.5	9.0 - 10.0	7.9
285 /30 ZR 20	99Y	○	TL	○	○	680	279	10.0	9.5 - 10.5	7.9
255 /30 ZR 21	93Y	○	TL	○	○	687	256	9.0	8.5 - 9.5	7.9
245 /30 ZR 22	92Y	○	TL	○	○	707	245	8.5	8.0 - 9.0	8.1
265 /30 ZR 22	97Y	○	TL	○	○	718	268	9.5	9.0 - 10.0	7.9
215 /35 ZR 17	(83)	○	TL	○	○	582	214	7.5	7.0 - 8.5	8.1
225 /35 ZR 17	86Y	○	TL	○	○	590	228	8.0	7.5 - 9.0	8.2
215 /35 ZR 18	(84)	○	TL	○	○	607	216	7.5	7.0 - 8.5	8.1
225 /35 ZR 18	87Y	○	TL	○	○	615	228	8.0	7.5 - 9.0	8.2
245 /35 ZR 18	88Y		TL	○	○	629	243	8.5	8.0 - 9.5	8.1
265 /35 ZR 18	97Y	○	TL	○	○	642	268	9.5	9.0 - 10.5	8.1
275 /35 ZR 18	95Y		TL	○	○	653	277	9.5	9.0 - 11.0	7.9
285 /35 ZR 18	97Y		TL	○	○	657	285	10.0	9.5 - 11.0	7.9
215 /35 ZR 19	(85)	○	TL	○	○	634	216	7.5	7.0 - 8.5	8.1
225 /35 ZR 19	88Y	○	TL	○	○	641	229	8.0	7.5 - 9.0	8.2
235 /35 ZR 19	91Y	○	TL	○	○	648	243	8.5	8.0 - 9.5	8.1
245 /35 ZR 19	93Y	○	TL	○	○	655	246	8.5	8.0 - 9.5	8.1
275 /35 ZR 19	96Y		TL	○	○	675	271	9.5	9.0 - 11.0	7.9
285 /35 ZR 19	99Y		TL	○	○	682	286	10.0	9.5 - 11.0	7.9
225 /35 ZR 20	90Y	○	TL	○	○	666	229	8.0	7.5 - 9.0	7.9
245 /35 ZR 20	95Y	○	TL	○	○	679	245	8.5	8.0 - 9.5	8.1
255 /35 ZR 20	97Y	○	TL	○	○	687	254	9.0	8.5 - 10.0	8.1
275 /35 ZR 20	102Y	○	TL	○	○	703	270	9.5	9.0 - 11.0	7.9
215 /40 ZR 16	86Y	○	TL	○	○	577	221	7.5	7.0 - 8.5	8.1
205 /40 ZR 17	(84)	○	TL	○	○	597	213	7.5	7.0 - 8.0	8.1
215 /40 ZR 17	(87)	○	TL	○	○	604	214	7.5	7.0 - 8.5	8.1
235 /40 ZR 17	90Y		TL	○	○	620	240	8.5	8.0 - 9.5	8.1
245 /40 ZR 17	95Y	○	TL	○	○	626	250	8.5	8.0 - 9.5	8.1
255 /40 ZR 17	94Y		TL	○	○	635	262	9.0	8.5 - 10.0	8.1
265 /40 ZR 17	96Y		TL	○	○	643	274	9.5	9.0 - 10.5	8.1
275 /40 ZR 17	98Y		TL	○	○	651	274	9.5	9.0 - 11.0	7.9
215 /40 ZR 18	89Y	○	TL	○	○	631	216	7.5	7.0 - 8.5	8.1
225 /40 ZR 18	92Y	○	TL	○	○	636	231	8.0	7.5 - 9.0	8.1
235 /40 ZR 18	95Y	○	TL	○	○	647	243	8.5	8.0 - 9.5	8.1
245 /40 ZR 18	97Y	○	TL	○	○	654	242	8.5	8.0 - 9.5	8.1
245 /40 ZR 19	98Y	○	TL	○	○	678	246	8.5	8.0 - 9.5	8.1
255 /40 ZR 19	100Y	○	TL	○	○	689	258	9.0	8.5 - 10.0	8.1
275 /40 ZR 19	101Y		TL	○	○	704	274	9.5	9.0 - 11.0	7.9
245 /40 ZR 20	99Y	○	TL	○	○	704	244	8.5	8.0 - 9.5	8.1
225 /45 ZR 16	89Y		TL	○	○	607	227	7.5	7.0 - 8.5	8.1
215 /45 ZR 17	87Y		TL	○	○	627	213	7.0	7.0 - 8.0	8.1
225 /45 ZR 17	94Y	○	TL	○	○	634	226	7.5	7.0 - 8.5	8.1
235 /45 ZR 17	94Y		TL	○	○	645	237	8.0	7.5 - 9.0	8.1
245 /45 ZR 17	95Y		TL	○	○	654	238	8.0	7.5 - 9.0	8.1
255 /45 ZR 17	98Y		TL	○	○	660	256	8.5	8.0 - 9.5	8.1
225 /45 ZR 18	95Y	○	TL	○	○	661	225	7.5	7.0 - 8.5	8.1
245 /45 ZR 18	100Y	○	TL	○	○	679	243	8.0	7.5 - 9.0	8.1

Continued next page.



FK452

Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
255 /45 ZR 18	103Y	○	TL	○	○	689	257	8.5	8.0 - 9.5	8.1
245 /45 ZR 19	98Y		TL	○	○	703	245	8.0	7.5 - 9.0	8.1
245 /45 ZR 20	99W		TL	○	○	730	243	8.0	7.5 - 9.0	7.8
255 /45 ZR 20	105Y	○	TL	○	○	741	255	8.5	8.0 - 9.5	8.1
205 /50 ZR 16	87W		TL	○	○	612	207	6.5	5.5 - 7.5	8.1
225 /50 ZR 16	92W		TL	○	○	632	231	7.0	6.0 - 8.0	8.1
205 /50 ZR 17	93Y	○	TL	○	○	636	208	6.5	5.5 - 7.5	8.1
205 /55 ZR 16	91W		TL	○	○	629	212	6.5	5.5 - 7.5	8.1
215 /55 ZR 16	93W		TL	○	○	644	225	7.0	6.0 - 7.5	8.1
225 /55 ZR 16	95W		TL	○	○	656	234	7.0	6.0 - 8.0	8.1
225 /60 R 16	98W		TL		○	675	226	6.5	6.0 - 8.0	8.1
235 /60 R 16	100W		TL		○	688	239	7.0	6.5 - 8.5	8.1

ZIEX ZE912

- Asymmetric radial with combination of high-speed capability and comfort.
- Designed for a wide range of vehicles such as sedans, wagons or SUV, CUV.



ZIEX ZE912

Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
215 /35 ZR 18	84W	○	TL	○	○	610	214	7.5	7.0 - 8.5	8.0
235 /35 ZR 18	90W	○	TL	○	○	623	241	8.5	8.0 - 9.5	8.1
255 /35 ZR 18	94W	○	TL	○	○	640	254	9.0	8.5 - 10.0	8.1
265 /35 ZR 18	97W	○	TL	○	○	644	268	9.5	9.0 - 10.5	8.1
195 /40 R 16	80V	○	TL	○	○	564	202	7.0	6.5 - 7.5	7.8
205 /40 R 16	83H	○	TL	○	○	571	214	7.5	7.0 - 8.0	7.9
215 /40 R 16	86W	○	TL	○	○	579	218	7.5	7.0 - 8.5	8.0
225 /40 R 16	85W		TL	○	○	589	228	8.0	7.5 - 9.0	8.1
195 /40 R 17	81W	○	TL	○	○	591	200	7.0	6.5 - 7.5	7.8
205 /40 ZR 17	84W	○	TL	○	○	595	213	7.5	7.0 - 8.0	7.9
215 /40 ZR 17	87W	○	TL	○	○	608	217	7.5	7.0 - 8.5	8.0
245 /40 ZR 17	91W		TL	○	○	629	247	8.5	8.0 - 9.5	8.1
255 /40 ZR 17	94W		TL	○	○	636	259	9.0	8.5 - 10.0	8.1
215 /40 ZR 18	89W	○	TL	○	○	631	216	7.5	7.0 - 8.5	8.0
225 /40 ZR 18	92W	○	TL	○	○	640	229	8.0	7.5 - 9.0	8.1
235 /40 ZR 18	95W	○	TL	○	○	648	243	8.5	8.0 - 9.5	8.1
245 /40 ZR 18	97W	○	TL	○	○	657	242	8.5	8.0 - 9.5	8.1
195 /45 R 14	77V		TL	○	○	534	194	6.5	6.0 - 7.5	7.8



ZIEX ZE912

Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
195 /45 R 15	78V		TL	○	○	559	191	6.5	6.0 - 7.5	7.8
195 /45 R 16	84V	○	TL	○	○	585	192	6.5	6.0 - 7.5	7.8
205 /45 R 16	87V	○	TL	○	○	594	206	7.0	6.5 - 7.5	7.9
195 /45 R 17	85W	○	TL	○	○	610	192	6.5	6.0 - 7.5	7.8
205 /45 ZR 17	88W	○	TL	○	○	619	206	7.0	6.5 - 7.5	7.9
215 /45 ZR 17	91W	○	TL	○	○	630	210	7.0	7.0 - 8.0	8.0
225 /45 ZR 17	94W	○	TL	○	○	638	224	7.5	7.0 - 8.5	8.1
235 /45 ZR 17	94W		TL	○	○	648	238	8.0	7.5 - 9.0	8.1
245 /45 ZR 17	95W		TL	○	○	657	241	8.0	7.5 - 9.0	8.1
215 /45 ZR 18	93W	○	TL	○	○	654	211	7.0	7.0 - 8.0	8.0
225 /45 ZR 18	91W		TL	○	○	664	223	7.5	7.0 - 8.5	8.1
235 /45 ZR 18	94W		TL	○	○	674	235	8.0	7.5 - 9.0	8.1
245 /45 ZR 18	100W	○	TL	○	○	679	240	8.0	7.5 - 9.0	8.1
195 /50 R 15	82H		TL	○	○	580	197	6.0	5.5 - 7.0	7.8
195 /50 R 15	82V		TL	○	○	580	197	6.0	5.5 - 7.0	7.8
205 /50 R 15	86H		TL	○	○	590	211	6.5	5.5 - 7.5	7.9
205 /50 R 15	86V		TL	○	○	589	212	6.5	5.5 - 7.5	7.9
225 /50 R 15	91V		TL	○	○	610	231	7.0	6.0 - 8.0	8.1
195 /50 R 16	84V		TL	○	○	604	198	6.0	5.5 - 7.0	7.8
205 /50 R 16	87V		TL	○	○	615	211	6.5	5.5 - 7.5	7.9
215 /50 R 16	90V		TL	○	○	628	221	7.0	6.0 - 7.5	8.0
225 /50 R 16	96V	○	TL	○	○	633	230	7.0	6.0 - 8.0	8.1
245 /50 R 16	97H		TL	○	○	651	247	7.5	7.0 - 8.5	8.1
205 /50 ZR 17	93W	○	TL	○	○	639	210	6.5	5.5 - 7.5	7.9
215 /50 R 17	91V		TL	○	○	653	220	7.0	6.0 - 7.5	8.0
225 /50 R 17	94V		TL	○	○	665	228	7.0	6.0 - 8.0	8.1
225 /50 R 17	94W		TL	○	○	658	233	7.0	6.0 - 8.0	8.1
235 /50 ZR 17	96W		TL	○	○	669	241	7.5	6.5 - 8.5	8.1
225 /50 R 18	95W		TL	○	○	688	227	7.0	6.0 - 8.0	8.1
235 /50 ZR 18	101W	○	TL	○	○	693	240	7.5	6.5 - 8.5	8.1
P245 /50 R 20	102V		TL	○		755	246	7.5	7.0 - 8.5	8.1
165 /55 R 14	72V		TL	○		540	166	5.0	4.5 - 6.0	7.0
185 /55 R 14	80H		TL	○	○	562	193	6.0	5.0 - 6.5	7.7
165 /55 R 15	75V		TL	○		563	170	5.0	4.5 - 6.0	7.0
185 /55 R 15	82V		TL	○	○	589	190	6.0	5.0 - 6.5	7.7
195 /55 R 15	85V		TL	○	○	597	201	6.0	5.5 - 7.0	7.8
205 /55 R 15	88V		TL	○	○	610	213	6.5	5.5 - 7.5	7.9
185 /55 R 16	83V		TL	○	○	613	193	6.0	5.0 - 6.5	7.7
195 /55 R 16	87V		TL	○	○	624	198	6.0	5.5 - 7.0	7.8
205 /55 R 16	91V		TL	○	○	635	213	6.5	5.5 - 7.5	7.9
215 /55 R 16	97V	○	TL	○	○	644	225	7.0	6.0 - 7.5	8.0
225 /55 R 16	95V		TL	○	○	656	233	7.0	6.0 - 8.0	8.1
215 /55 ZR 17	94W		TL	○	○	666	225	7.0	6.0 - 7.5	8.0
225 /55 ZR 17	101W	○	TL	○	○	685	229	7.0	6.0 - 8.0	8.1
235 /55 ZR 17	99W		TL	○	○	688	243	7.5	6.5 - 8.5	8.1
215 /55 R 18	95H		TL	○	○	698	222	7.0	6.0 - 7.5	8.0
225 /55 R 18	98H		TL	○	○	709	231	7.0	6.0 - 8.0	8.1
235 /55 R 18	100V		TL	○	○	717	245	7.5	6.5 - 8.5	8.1
255 /55 R 18	109V	○	TL	○	○	737	265	8.0	7.0 - 9.0	8.1
235 /55 R 19	105W	○	TL	○	○	742	246	7.5	6.5 - 8.5	8.1
245 /55 R 19	103H		TL	○	○	756	253	7.5	7.0 - 8.5	8.1
165 /60 R 12	71H		TL		○	505	165	5.0	4.5 - 6.0	7.0
175 /60 R 13	77H		TL		○	541	173	5.0	5.0 - 6.0	7.8
185 /60 R 13	80H		TL		○	553	185	5.5	5.0 - 6.5	7.9
205 /60 R 13	86H		TL		○	576	205	6.0	5.5 - 7.5	8.1
165 /60 R 14	75H		TL		○	557	164	5.0	4.5 - 6.0	7.0
175 /60 R 14	79H		TL		○	569	173	5.0	5.0 - 6.0	7.8
185 /60 R 14	82H		TL		○	579	186	5.5	5.0 - 6.5	7.9
195 /60 R 14	86H		TL		○	592	199	6.0	5.5 - 7.0	8.0
205 /60 R 14	88H		TL		○	603	205	6.0	5.5 - 7.5	8.1
175 /60 R 15	81H		TL		○	595	170	5.0	5.0 - 6.0	7.8
185 /60 R 15	84H		TL		○	604	186	5.5	5.0 - 6.5	7.9
185 /60 R 15	88H	○	TL		○	603	189	5.5	5.0 - 6.5	7.9
195 /60 R 15	88H		TL		○	617	198	6.0	5.5 - 7.0	8.0
195 /60 R 15	88V		TL		○	617	198	6.0	5.5 - 7.0	8.0
205 /60 R 15	91H		TL		○	629	205	6.0	5.5 - 7.5	8.1
205 /60 R 15	91V		TL		○	629	205	6.0	5.5 - 7.5	8.1
215 /60 R 15	94H		TL		○	640	221	6.5	6.0 - 7.5	8.1

Continued next page.



ZIE X ZE912

Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
225 /60 R 15	96H		TL		○	653	223	6.5	6.0 - 8.0	8.1
225 /60 R 15	96W		TL		○	653	223	6.5	6.0 - 8.0	8.1
205 /60 R 16	92H		TL		○	653	204	6.0	5.5 - 7.5	8.1
215 /60 R 16	99H	○	TL		○	665	215	6.5	6.0 - 7.5	8.1
225 /60 R 16	98H		TL		○	677	222	6.5	6.0 - 8.0	8.1
225 /60 R 16	98W		TL		○	677	222	6.5	6.0 - 8.0	8.1
235 /60 ZR 16	100W		TL		○	689	237	7.0	6.5 - 8.5	8.1
215 /60 R 17	96H		TL		○	692	217	6.5	6.0 - 7.5	8.1
225 /60 R 17	99H		TL		○	705	225	6.5	6.0 - 8.0	8.1
235 /60 R 17	102H		TL		○	716	239	7.0	6.5 - 8.5	8.1
255 /60 R 17	106H		TL		○	738	258	7.5	7.0 - 9.0	8.1
225 /60 R 18	100H		TL		○	731	224	6.5	6.0 - 8.0	8.1
235 /60 R 18	107V	○	TL		○	763	258	7.0	6.5 - 8.5	8.1
245 /60 R 18	105H		TL		○	751	245	7.0	7.0 - 8.5	8.1
255 /60 R 18	112V	○	TL		○	763	258	7.5	7.0 - 9.0	8.1
265 /60 R 18	110V		TL		○	775	271	8.0	7.5 - 9.5	8.1
P 255 /60 R 19	108H		TL		○	789	259	7.5	7.0 - 9.0	8.1
175 /65 R 14	82H		TL		○	585	177	5.0	5.0 - 6.0	7.8
185 /65 R 14	86H		TL		○	596	190	5.5	5.0 - 6.5	7.9
195 /65 R 14	89H		TL		○	611	203	6.0	5.5 - 7.0	8.0
175 /65 R 15	84H		TL		○	612	176	5.0	5.0 - 6.0	7.8
185 /65 R 15	88H		TL		○	623	187	5.5	5.0 - 6.5	7.9
195 /65 R 15	91H		TL		○	636	201	6.0	5.5 - 7.0	8.0
195 /65 R 15	91V		TL		○	636	201	6.0	5.5 - 7.0	8.0
205 /65 R 15	94H		TL		○	648	209	6.0	5.5 - 7.5	8.1
205 /65 R 15	94V		TL		○	648	209	6.0	5.5 - 7.5	8.1
215 /65 R 15	96H		TL		○	663	221	6.5	6.0 - 7.5	8.1
205 /65 R 16	95V		TL		○	672	208	6.0	5.5 - 7.5	8.1
215 /65 R 16	98H		TL		○	688	221	6.5	6.0 - 7.5	8.1
225 /65 R 16	100H		TL		○	700	228	6.5	6.0 - 8.0	8.1
235 /65 R 16	103H		TL		○	714	242	7.0	6.5 - 8.5	8.1
225 /65 R 17	102H		TL		○	730	230	6.5	6.0 - 8.0	8.1
235 /65 R 17	108V	○	TL		○	738	242	7.0	6.5 - 8.5	8.1
235 /65 R 18	106H		TL		○	766	241	7.0	6.5 - 8.5	8.1
P 255 /65 R 18	109H		TL			788	256	7.5	7.0 - 9.0	8.1

ZIE X ZE914 E CORUN

- Excellent grip.
- Low rolling noise.
- Reduced rolling resistance.
- Particularly suited to sporty/comfort performance cars.

ZIE X ZE914 E CORUN



Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
255 /35 R 18	90W		TL	○	○	635	260	9.0	8.5 - 10.0	7.9
265 /35 R 18	97W	○	TL	○	○	643	271	9.5	9.0 - 10.5	7.9
195 /40 R 16	80V	○	TL	○	○	562	200	7.0	6.5 - 7.5	7.6
215 /40 R 16	86W	○	TL	○	○	578	218	7.5	7.0 - 8.5	7.8
195 /40 R 17	81W	○	TL	○	○	588	200	7.0	6.5 - 7.5	7.7
205 /40 R 17	84W	○	TL	○	○	596	212	7.5	7.0 - 8.0	7.7
215 /40 R 17	87W	○	TL	○	○	604	218	7.5	7.0 - 8.5	7.8
245 /40 R 17	91W		TL	○	○	628	248	8.5	8.0 - 9.5	7.9
205 /40 R 18	86W	○	TL	○	○	621	212	7.5	7.0 - 8.0	7.8
215 /40 R 18	89W	○	TL	○	○	629	218	7.5	7.0 - 8.5	7.8
225 /40 R 18	92W	○	TL	○	○	637	230	8.0	7.5 - 9.0	7.9
235 /40 R 18	95W	○	TL	○	○	645	241	8.5	8.0 - 9.5	7.9



ZIE X ZE914 E CORUN

Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
245 /40 R 18	97W	○	TL	○	○	653	248	8.5	8.0 - 9.5	7.9
195 /45 R 15	78V		TL	○	○	557	195	6.5	6.0 - 7.5	7.6
195 /45 R 16	84V	○	TL	○	○	582	195	6.5	6.0 - 7.5	7.6
205 /45 R 16	87V	○	TL	○	○	590	206	7.0	6.5 - 7.5	7.7
215 /45 R 16	86V		TL	○	○	600	213	7.0	7.0 - 8.0	7.8
195 /45 R 17	85W	○	TL	○	○	608	195	6.5	6.0 - 7.5	7.7
205 /45 R 17	88W	○	TL	○	○	616	206	7.0	6.5 - 7.5	7.7
205 /45 RF 17	84W		TL	○	○	616	206	7.0	6.5 - 7.5	7.6
215 /45 R 17	91W	○	TL	○	○	626	213	7.0	7.0 - 8.0	7.8
225 /45 R 17	94W	○	TL	○		635	225	7.5	7.0 - 8.5	7.9
225 /45 RF 17	91W		TL	○	○	634	225	7.5	7.0 - 8.5	8.0
235 /45 R 17	94W		TL	○	○	644	236	8.0	7.5 - 9.0	7.9
245 /45 R 17	95W		TL	○	○	652	243	8.0	7.5 - 9.0	7.9
215 /45 R 18	93W	○	TL	○	○	651	213	7.0	7.0 - 8.0	7.8
225 /45 R 18	95W	○	TL	○	○	659	225	7.5	7.0 - 8.5	7.9
245 /45 R 18	100W	○	TL	○	○	677	243	8.0	7.5 - 9.0	7.9
175 /50 R 15	75H		TL	○	○	557	182	5.5	5.0 - 6.0	7.7
195 /50 R 15	82V		TL	○	○	577	201	6.0	5.5 - 7.0	7.6
205 /50 R 15	86V		TL	○	○	587	214	6.5	5.5 - 7.5	7.7
185 /50 R 16	81V		TL	○	○	592	194	6.0	5.0 - 6.5	7.7
195 /50 R 16	88V	○	TL	○	○	602	201	6.0	5.5 - 7.0	7.6
205 /50 R 16	87V		TL	○	○	612	214	6.5	5.5 - 7.5	7.7
225 /50 R 16	96W	○	TL	○	○	632	233	7.0	6.0 - 8.0	7.9
205 /50 R 17	93W	○	TL	○	○	638	214	6.5	5.5 - 7.5	7.7
215 /50 R 17	91W		TL	○	○	648	226	7.0	6.0 - 7.5	7.8
225 /50 R 17	94W		TL	○	○	658	233	7.0	6.0 - 8.0	7.9
225 /50 RF 17	94W		TL	○	○	658	233	7.0	6.0 - 8.0	8.0
235 /50 R 17	96W		TL	○	○	668	245	7.5	6.5 - 8.5	7.9
235 /50 R 18	101W	○	TL	○	○	693	245	7.5	6.5 - 8.5	8.0
185 /55 R 14	80H		TL	○	○	560	194	6.0	5.0 - 6.5	7.6
185 /55 R 15	82H		TL	○	○	585	194	6.0	5.0 - 6.5	7.6
185 /55 R 15	86V	○	TL	○	○	585	194	6.0	5.0 - 6.5	7.5
195 /55 R 15	85H		TL	○	○	595	201	6.0	5.5 - 7.0	7.7
195 /55 R 15	85V		TL	○	○	595	201	6.0	5.5 - 7.0	7.6
205 /55 R 15	88V		TL	○	○	607	214	6.5	5.5 - 7.5	7.7
185 /55 R 16	83V		TL	○		610	194	6.0	5.0 - 6.5	7.6
195 /55 R 16	87V		TL	○	○	620	201	6.0	5.5 - 7.0	7.7
195 /55 RF 16	87W		TL	○	○	620	201	6.0	5.5 - 7.0	7.2
205 /55 R 16	91V		TL	○	○	632	214	6.5	5.5 - 7.5	7.8
205 /55 R 16	91W		TL	○	○	632	212	6.5	5.5 - 7.5	7.8
205 /55 RF 16	91W		TL	○	○	632	214	6.5	5.5 - 7.5	7.3
215 /55 R 16	93V		TL	○		640	227	7.0	6.0 - 7.5	7.8
215 /55 R 16	93W		TL	○		641	227	7.0	6.0 - 7.5	7.8
215 /55 R 16	97W	○	TL	○	○	642	226	7.0	6.0 - 7.5	7.8
225 /55 R 16	95V		TL	○	○	654	233	7.0	6.0 - 8.0	8.0
225 /55 R 16	99W	○	TL	○	○	654	233	7.0	6.0 - 8.0	7.9
205 /55 R 17	91V		TL	○	○	658	214	6.5	5.5 - 7.5	7.7
205 /55 RF 17	91W		TL	○	○	658	214	6.5	5.5 - 7.5	7.3
215 /55 R 17	94W		TL	○	○	668	226	7.0	6.0 - 7.5	7.8
225 /55 R 17	101W	○	TL	○	○	680	233	7.0	6.0 - 8.0	7.9
235 /55 R 17	99W		TL	○	○	690	245	7.5	6.5 - 8.5	7.9
215 /55 R 18	95H		TL	○	○	693	226	7.0	6.0 - 7.5	7.8
225 /55 R 18	98H		TL	○	○	705	233	7.0	6.0 - 8.0	8.0
235 /55 R 18	100V		TL	○	○	715	245	7.5	6.5 - 8.5	8.0
255 /55 R 18	109V	○	TL	○	○	737	265	8.0	7.0 - 9.0	8.0
165 /60 R 12	71H		TL		○	503	170	5.0	4.5 - 6.0	7.7
185 /60 R 13	80H		TL		○	552	189	5.5	5.0 - 6.5	7.8
165 /60 R 14	75H		TL		○	554	170	5.0	4.5 - 6.0	7.7
175 /60 R 14	79H		TL		○	566	177	5.0	5.0 - 6.0	7.7
185 /60 R 14	82H		TL		○	578	189	5.5	5.0 - 6.5	7.7
175 /60 R 15	81H		TL		○	591	177	5.0	5.0 - 6.0	7.6
185 /60 R 15	84H		TL		○	603	189	5.5	5.0 - 6.5	7.8
185 /60 R 15	88H	○	TL		○	603	189	5.5	5.0 - 6.5	7.7
195 /60 R 15	88H		TL		○	615	201	6.0	5.5 - 7.0	7.9
195 /60 R 15	88V		TL		○	615	201	6.0	5.5 - 7.0	7.8
205 /60 R 15	91H		TL		○	627	209	6.0	5.5 - 7.5	7.9
205 /60 R 15	91V		TL		○	627	209	6.0	5.5 - 7.5	7.9
225 /60 R 15	96W		TL		○	651	228	6.5	6.0 - 8.0	8.0

Continued next page.



ZIEX ZE914 ECORUN

Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
195 /60 R 16	89V		TL		○	640	201	6.0	5.5 - 7.0	7.8
205 /60 R 16	92H		TL			651	208	6.0	5.5 - 7.5	7.9
205 /60 R 16	96V	○	TL		○	652	209	6.0	5.5 - 7.5	7.9
215 /60 R 16	99H	○	TL		○	664	221	6.5	6.0 - 7.5	7.9
215 /60 R 16	95V		TL			668	224	6.5	6.0 - 7.5	7.1
225 /60 R 16	98W		TL		○	676	228	6.5	6.0 - 8.0	8.0
235 /60 R 16	100W		TL		○	688	240	7.0	6.5 - 8.5	8.0
215 /60 R 17	96H		TL		○	690	221	6.5	6.0 - 7.5	7.9
225 /60 R 17	99H		TL			702	228	6.5	6.0 - 8.0	8.0
225 /60 R 17	99V		TL			702	228	6.5	6.0 - 8.0	8.0
235 /60 R 17	102H		TL		○	714	240	7.0	6.5 - 8.5	8.0
225 /60 R 18	100H		TL		○	727	228	6.5	6.0 - 8.0	7.9
235 /60 R 18	107V		TL		○	739	240	7.0	6.5 - 8.5	8.0
265 /60 R 18	110V		TL		○	775	272	8.0	7.5 - 9.5	8.0
175 /65 R 14	82H		TL		○	584	177	5.0	5.0 - 6.0	7.7
185 /65 R 14	86H		TL		○	596	189	5.5	5.0 - 6.5	7.8
165 /65 R 15	81H		TL		○	595	170	5.0	4.5 - 6.0	7.7
175 /65 R 15	84H		TL		○	609	177	5.0	5.0 - 6.0	7.6
185 /65 R 15	88H		TL			621	189	5.5	5.0 - 6.5	7.8
195 /65 R 15	91H		TL			637	201	6.0	5.5 - 7.0	7.9
195 /65 R 15	91V		TL			637	201	6.0	5.5 - 7.0	7.9
205 /65 R 15	94H		TL		○	647	209	6.0	5.5 - 7.5	7.9
215 /65 R 15	96H		TL		○	661	221	6.5	6.0 - 7.5	7.9
205 /65 R 16	95V		TL		○	672	209	6.0	5.5 - 7.0	8.0
215 /65 R 16	98H		TL		○	686	221	6.5	6.0 - 7.5	7.9
225 /65 R 17	102V		TL		○	724	228	6.5	6.0 - 8.0	7.9
235 /65 R 17	108V		TL		○	740	240	7.0	6.5 - 8.5	8.0
235 /65 R 18	106H		TL		○	765	240	7.0	6.5 - 8.5	8.0
205 /70 R 16	97H		TL		○	694	209	6.0	5.0 - 7.0	8.1



SINCERA SN828

- Low noise and comfortable ride.
- Designed for fuel-efficiency and long service life.



SINCERA SN828

Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
155 /65 R 13	73T		TL		○	534	155	4.5	4.5 - 5.5	6.7
165 /65 R 13	77T		TL		○	547	170	5.0	4.5 - 6.0	7.2
175 /65 R 13	80T		TL		○	558	171	5.0	5.0 - 6.0	7.7
155 /65 R 14	75T		TL		○	558	156	4.5	4.5 - 5.5	6.5
165 /65 R 14	79T		TL		○	570	170	5.0	4.5 - 6.0	7.2
175 /65 R 14	82T		TL		○	587	178	5.0	5.0 - 6.0	7.7
175 /65 R 14	86T	○	TL		○	587	178	5.0	5.0 - 6.0	7.7
185 /65 R 14	86T		TL		○	598	190	5.5	5.0 - 6.5	7.8
195 /65 R 14	89T		TL		○	611	201	6.0	5.5 - 7.0	7.9
185 /65 R 15	88T		TL		○	624	190	5.5	5.0 - 6.5	7.8
195 /65 R 15	91T		TL		○	637	200	6.0	5.5 - 7.0	7.9
195 /65 R 15	95T	○	TL		○	637	200	6.0	5.5 - 7.0	7.9
205 /65 R 15	94T		TL		○	647	208	6.0	5.5 - 7.5	8.0
215 /65 R 15	96T		TL		○	661	218	6.5	6.0 - 7.5	8.0
145 /70 R 12	69S		TL		○	511	150	4.5	3.5 - 5.0	6.3
155 /70 R 12	73S		TL		○	524	156	4.5	4.0 - 5.0	6.7
145 /70 R 13	71T		TL		○	536	150	4.5	3.5 - 5.0	6.3
155 /70 R 13	75T		TL		○	549	156	4.5	4.0 - 5.0	6.7
165 /70 R 13	79T		TL		○	563	170	5.0	4.0 - 5.5	7.2
175 /70 R 13	82T		TL		○	578	178	5.0	4.5 - 6.0	7.3
185 /70 R 13	86T		TL		○	591	190	5.5	4.5 - 6.0	7.6
165 /70 R 14	81T		TL		○	590	170	5.0	4.0 - 5.5	7.2
165 /70 R 14	85T	○	TL		○	590	170	5.0	4.0 - 5.5	7.2
175 /70 R 14	84T		TL		○	604	178	5.0	4.5 - 6.0	7.5
175 /70 R 14	88T	○	TL		○	604	178	5.0	4.5 - 6.0	7.5
185 /70 R 14	88T		TL		○	616	190	5.5	4.5 - 6.0	7.6
195 /70 R 14	91T		TL		○	632	202	6.0	5.0 - 6.5	7.8



SINCERA SN816

- Low noise and comfortable ride.
- Designed for fuel-efficiency and long service life.



Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width [code]		Tread Depth (mm)
								Measuring	Approved	
155 /65 R 14	75S		TL			559	152	4.5	4.5 - 5.5	6.2
175 /70 R 14	84T		TL		○	603	174	5.0	4.5 - 6.0	7.3
185 /70 R 14	88T		TL		○	617	190	5.5	4.5 - 6.0	7.4
205 /70 R 14	95T		TL		○	644	209	6.0	5.0 - 7.0	7.5



SINCERA SN832i

- Low noise and comfortable ride.
- Designed for fuel-efficiency and long service life.



Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width [code]		Tread Depth (mm)
								Measuring	Approved	
165 /50 R 15	72H		TL	○	○	547	163	5.0	4.5 - 6.0	7.5
175 /50 R 15	75H		TL	○	○	557	177	5.5	5.0 - 6.0	8.1
195 /50 R 15	82H		TL	○	○	577	197	6.0	5.5 - 7.0	8.3
195 /50 R 16	84H		TL	○	○	602	197	6.0	5.5 - 7.0	8.3
205 /50 R 16	87H		TL	○	○	612	209	6.5	5.5 - 7.5	8.4
165 /55 R 14	72T		TL	○	○	536	169	5.0	4.5 - 6.0	7.5
185 /55 R 15	82H		TL	○	○	583	193	6.0	5.0 - 6.5	8.2
195 /55 R 15	85H		TL	○	○	595	199	6.0	5.5 - 7.0	8.3
195 /55 R 16	87H		TL	○	○	620	202	6.0	5.5 - 7.0	8.3
205 /55 R 16	91H		TL	○	○	633	212	6.5	5.5 - 7.5	8.4
165 /60 R 13	73T		TL		○	527	168	5.0	4.5 - 6.0	7.5
165 /60 R 14	75T		TL		○	551	168	5.0	4.5 - 6.0	7.5
185 /60 R 14	82H		TL		○	577	185	5.5	5.0 - 6.5	8.2
185 /60 R 15	84H		TL		○	602	185	5.5	5.0 - 6.5	8.2
195 /60 R 15	88H		TL		○	613	199	6.0	5.5 - 7.0	8.3
205 /60 R 15	91H		TL		○	626	205	6.0	5.5 - 7.5	8.4
205 /60 R 16	92H		TL		○	651	205	6.0	5.5 - 7.5	8.4
215 /60 R 16	95H		TL		○	663	217	6.5	6.0 - 7.5	8.5
165 /65 R 13	77T		TL		○	543	177	5.0	4.5 - 6.0	7.5
165 /65 R 14	79T		TL		○	570	170	5.0	4.5 - 6.0	7.5
175 /65 R 14	82T		TL		○	584	177	5.0	5.0 - 6.0	8.1
185 /65 R 14	86H		TL		○	596	189	5.5	5.0 - 6.5	8.2
185 /65 R 15	88T		TL		○	621	189	5.5	5.0 - 6.5	8.2
195 /65 R 15	91H		TL		○	635	201	6.0	5.5 - 7.0	8.3
205 /65 R 15	94H		TL		○	647	209	6.0	5.5 - 7.5	8.4
215 /65 R 15	96H		TL		○	661	221	6.5	6.0 - 7.5	8.5
155 /70 R 12	73T		TL		○	523	158	4.5	4.0 - 5.0	7.4
155 /70 R 13	75T		TL		○	548	156	4.5	4.0 - 5.0	7.4
165 /70 R 13	79T		TL		○	561	177	5.0	4.0 - 5.5	7.5
175 /70 R 13	82T		TL		○	575	178	5.0	4.5 - 6.0	8.1
185 /70 R 13	86T		TL		○	590	191	5.5	4.5 - 6.0	8.2
165 /70 R 14	81T		TL		○	587	173	5.0	4.0 - 5.5	7.5
175 /70 R 14	84T		TL		○	601	179	5.0	4.5 - 6.0	8.1
185 /70 R 14	88T		TL		○	616	191	5.5	4.5 - 6.0	8.2
195 /70 R 14	91H		TL		○	630	202	6.0	5.0 - 6.5	8.3
205 /70 R 15	96S		TL		○	669	210	6.0	5.0 - 7.0	8.4
215 /70 R 15	98T		TL		○	682	230	6.5	5.5 - 7.0	8.5

SINCERA SN807

- Low noise and comfortable ride.
- Designed for fuel-efficiency and long service life.



Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width [code]		Tread Depth (mm)
								Measuring	Approved	
145 /80 R 10	69S		TL		○	488	145	4.0	3.5 - 5.0	6.4
145 /80 R 12	74T		TL		○	539	146	4.0	3.5 - 5.0	6.4
155 /80 R 12	77T		TL		○	555	157	4.5	4.0 - 5.0	7.2
145 /80 R 13	75T		TL		○	564	149	4.0	3.5 - 5.0	7.0
155 /80 R 13	79T		TL		○	580	159	4.5	4.0 - 5.0	7.2
165 /80 R 13	83T		TL		○	596	164	4.5	4.0 - 5.5	7.3
175 /80 R 14	88T		TL		○	638	181	5.0	4.5 - 6.0	7.4



SINCERA SN832 ECORUN

- Enhanced fuel efficiency and wet performance.
- Wide straight and lateral grooves enhance aquaplaning resistance.



Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width [code]		Tread Depth (mm)
								Measuring	Approved	
175 /55 R 15	77T		TL		○	575	183	5.5	5.0 - 6.0	8.1
165 /60 R 14	79T	○	TL		○	556	170	5.0	4.5 - 6.0	8.1
185 /60 R 14	82T		TL		○	580	190	5.5	5.0 - 6.5	8.2
155 /60 R 15	74T		TL		○	569	156	4.5	4.5 - 5.5	8.1
165 /60 R 15	77T		TL		○	581	170	5.0	4.5 - 6.0	8.1
185 /60 R 15	84T		TL		○	605	190	5.5	5.0 - 6.5	8.2
155 /65 R 14	75T		TL		○	561	156	4.5	4.5 - 5.5	8.1
165 /65 R 14	79T		TL		○	573	169	5.0	4.5 - 6.0	8.1
175 /65 R 14	82T		TL		○	589	176	5.0	5.0 - 6.0	8.2
185 /65 R 14	86T		TL		○	601	188	5.5	5.0 - 6.5	8.3
145 /65 R 15	72T		TL		○	572	149	4.5	4.0 - 5.0	8.1
165 /65 R 15	81T		TL		○	598	169	5.0	4.5 - 6.0	8.1
175 /65 R 15	84T		TL		○	614	176	5.0	5.0 - 6.0	8.2
185 /65 R 15	88T		TL		○	626	188	5.5	5.0 - 6.5	8.3
195 /65 R 15	91T		TL		○	640	200	6.0	5.5 - 7.0	8.4
155 /70 R 13	75T		TL		○	551	156	4.5	4.0 - 5.0	8.1
165 /70 R 13	79T		TL		○	567	170	5.0	4.0 - 5.5	8.2
175 /70 R 13	82T		TL		○	581	177	5.0	4.5 - 6.0	8.3
165 /70 R 14	81T		TL		○	593	170	5.0	4.0 - 5.5	8.2
175 /70 R 14	84T		TL		○	607	177	5.0	4.5 - 6.0	8.3
155 /80 R 13	79T		TL		○	582	158	4.5	4.0 - 5.0	8.0



FK07J

- Custom-made to enhance the superb driving performance of European luxury cars.
- Incorporates a special compound in its unique structure to meet performance requirements.



Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width [code]		Tread Depth (mm)
								Measuring	Approved	
215 /70 R 15	97V		TL		○	682	220	6.5	5.5 - 7.0	8.0

FK07E

- Custom-made to enhance the superb driving performance of the MINI.
- Incorporates a special compound in its unique structure to meet performance requirements.



Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width [code]		Tread Depth (mm)
								Measuring	Approved	
165 /70 R 10	72H		TL		○	484	174	5.0	4.0 - 5.5	7.1

AZENIS RT615K+

- Developed for the maximum performance-minded driver, the AZENIS RT615K+ is derived from the original competition-winning RT615K.
- The PLUS encompasses an all-new digitally-engineered, nanotech-formulated compound for superior grip and excellent handling.



Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width [code]		Tread Depth (mm)
								Measuring	Approved	
265 /35 R 18	97W	RF	TL	○		645	272	9.5	9.0 - 10.5	6.1
205 /40 R 16	83W	RF	TL	○		572	217	7.5	7.0 - 8.0	6.1
215 /40 R 17	87W	RF	TL	○		606	221	7.5	7.0 - 8.5	6.1
235 /40 R 17	90W		TL	○		619	243	8.5	8.0 - 9.5	6.1
255 /40 R 17	94W		TL	○		634	260	9.0	8.5 - 10.0	6.1
225 /40 R 18	92W	RF	TL	○		638	236	8.0	7.5 - 9.0	6.1
235 /40 R 18	95W	RF	TL	○		648	243	8.5	8.0 - 9.5	6.1
245 /40 R 18	97W	RF	TL	○		652	249	8.5	8.0 - 9.5	6.1
295 /40 R 18	103W		TL	○		691	302	10.5	10.0 - 11.5	6.1
215 /45 R 16	86W		TL	○		599	214	7.0	7.0 - 8.0	6.1
215 /45 R 17	87W		TL	○		628	211	7.0	7.0 - 8.0	6.1
225 /45 R 17	94W	RF	TL	○		636	225	7.5	7.0 - 8.5	6.1
245 /45 R 17	99W	RF	TL	○		652	243	8.0	7.5 - 9.0	6.1
205 /50 R 15	89W	RF	TL	○		591	209	6.5	5.5 - 7.5	6.1
225 /50 R 16	92W		TL	○		631	229	7.0	6.0 - 8.0	6.1
195 /60 R 14	86H		TL	○		590	200	6.0	5.5 - 7.0	6.1



FK07U

- Incorporates well-balanced VV-groove tread design.
- Provides superb comfort, outstanding long distance performance and high-speed durability.



Size	Load Index & Speed Symbol	XL or RF	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
165 /70 R 12	77H		TL		○	540	172	5.0	4.0 - 5.5	7.2
175 /70 R 13	82H		TL		○	579	178	5.0	4.5 - 6.0	7.7
185 /70 R 13	86H		TL		○	593	193	5.5	4.5 - 6.0	7.9
185 /70 R 14	88H		TL		○	618	189	5.5	4.5 - 6.0	7.9
195 /70 R 14	91H		TL		○	633	204	6.0	5.0 - 6.5	8.0

FALKEN

4×4[4WD]
TIRES



This is just a sample image.

4x4 [4WD] TIRES

SAFETY WARNING

SERIOUS INJURY OR DEATH MAY RESULT FROM EXPLOSION OF TIRE/RIM ASSEMBLY, IF PROPER MOUNTING INSTRUCTIONS ARE NOT FOLLOWED.

- ***ONLY** specially trained persons should mount tires.
- ***ALWAYS** match rim diameter with tire bead diameter.
- ***NEVER** mount a tire on a cracked, bent, rusted or otherwise damaged rim or a rim which has been repaired.
- ***NEVER** put a flammable substance into a tire.
- ***ALWAYS** clean and lubricate the rim and tire beads.
- ***ALWAYS** use an extension air hose with gauge and clip-on air chuck.
- ***ALWAYS** lock the wheel on the tire mounting machine, or place it in a safety cage when inflating.
- ***ALWAYS** stand clear, and **NEVER** lean or reach over the tire/rim assembly when inflating.
- ***NEVER** inflate over 40 psi (275 kPa) to seat beads.
- ***ALWAYS** adjust tire pressure to the vehicle manufacturer's recommendations after beads are fully seated.

4x4 [4WD] TIRES LINE-UP



4x4(4WD) TIRES LINE-UP

SERIES	SIZE	LI		FK510SUV	FK453CC	S/TZ05	S/TZ04	WPAT3W	WPHT	WP AT01	LA/CT03	FKA/P	LA/AT	LA/TA	CT50AS	MT01
		St'd	Reinf													
30	295/30R22	99	103				*103W									
35	315/35R20	106	110	110Y	110Y											
	265/35R22	98	102			102H										
	285/35R22				106W											
	295/35R24	-	110			110H										
	305/35R24	-	112			112H										
40	275/40R20	102	106	106Y	106Y,W	106H										
	265/40R22	-	106			106H										
	285/40R22	106	110			110H										
	295/40R20				110W											
	305/40R22	110	114			114H										
45	275/45R19	-	-		108Y											
	285/45R19	-	-		111W											
	245/45R20	-	-		103Y											
	265/45R20	104	108	108Y												
	275/45R20	106	110	110W	110W	110H	[P]106H									
	295/45R20	110	114			114H										
	275/45R22	-	116				112H									
	285/45R22	110	114			114H										
50	305/45R22	-	118			118H	[P]118H									
	235/50R18	97	101	101Y	101Y											
	245/50R18	-	-		100Y											
	255/50R19	103	107	107Y	107Y											
	265/50R19	-	-		110Y											
	245/50R20	-	-			102H										
	255/50R20	105	109		109W	109H									[P]104V,105V	
	265/50R20	107	111			111H										
	285/50R20	112	116			116V	112H	112V	116T							
	295/50R20	-	118			118H	118H									
	305/50R20	116	120			120H										
55	235/55R17	99	103	103W	103W											
	245/55R17	-	-		102W											
	235/55R18	100	104	104Y	100V											
	255/55R18	105	109	109W	109W	109V										
	235/55R19	-	-		105W											
	245/55R19	-	-			103H										
	255/55R19	107	111	111W	111V											
	275/55R20	113	117			117H	117H			[P]111T						
	285/55R20	-	-					122/119T								
	305/55R20	-	-					121/118S								121/118Q
60	235/60R16	100	104				[P]99H,**100H		100H							
	215/60R17	96	100						96H							
	235/60R17	102	106		102V				102H							
	275/60R17	110	-				*111H									
	235/60R18	103	107	107W	107W	107V			107H							
	255/60R18	108	112		112W				112V							
	265/60R18	110	114			110V	*110H	114T	110H							
	275/60R18	113	117				113H									
	285/60R18	116	120				116H		116H	116H,120H						
	325/60R18	-	-													
	255/60R19	109	113			109H										
	265/60R20	-	-					121/118S								
65	275/60R20	115	116			115H		115T		115S						
	325/60R20	-	-					126/123S								
	215/65R16	98	102				**98H									
	255/65R16	109	113				[P]106S			109T	98S					
	225/65R17	102	106						102H							
	235/65R17	104	108		108V				104T,108H	104T						
	245/65R17	107	111						111T	107S	111H					
	255/65R17	110	114						114T		110S					
	265/65R17	112	116						116T	112S	112H,S					
	275/65R17	115	119				112H			115H	115H					
	285/65R17	116	-				115H			116H						
	235/65R18	106	110							106H						
	265/65R18	114	116													
	275/65R18	116	116				116T	123/120S		*123/120Q						
	285/65R18	-	-					125/122S		*121/118S						125/122Q
70	305/65R18	-	-					124/121R								
	325/65R18	-	-					127/124S								
	275/65R20	-	-					126/123S								

To be continue next page.



SERIES	SIZE	LI		FK510SUV	FK453CC	S/TZ05	S/TZ04	WPAT3W	WPH	WPAT01	LA/CT03	FKA/P	LA/AT	LA/TA	CT50AS	MT01
		St'd	Reinf													
70	205/70R15	96	100				**95S,**95H		96T		95S					
	215/70R15	98	103						98H							
	225/70R15	100	104						100S							
	255/70R15	108	-				[P]108S	108H,T	108S							
	265/70R15	112	116				[P]110S,**110H	112H	112T				110S			
	215/70R16	100	104				[P]99S,**99H	100S	100T	99S			99S			
	225/70R16	103	107					103T								
	235/70R16	106	109				[P]104S,**104H	109T	106S	106T						
	245/70R16	107	111				[P]106S,**107H,T	111T	107T,S,*113/110Q				107S			
	255/70R16	111	115				[P]109S	115T	111S							
	265/70R16	112	116				[P]111S,**112H,T	112T	112S	112T,S,*117/114Q			112S			
	275/70R16	114	-				114S,**114H	114H	114T,S				114S			
	305/70R16	-	-					124/121R	*124/120S							
	245/70R17	110	114					119/116S	110S	*119/118Q						
	255/70R17	112	-													
	265/70R17	115	116					121/118S	115S,121/118S	[P]113S,*121/110S						121/118Q
	285/70R17	-	-							*121/118S						121/118Q
	LT295/70R17	-	-													121/118Q
	315/70R17	125	-					121/118S		121/118Q						121/118Q
	255/70R18	113	116													
	265/70R18	116	-				[P]114S	116T	116S							
	275/70R18	-	-					125/122S								125/122Q
75	215/75R15	100	-							100/97S		100/97Q				
	225/75R15	102	106						102S							
	235/75R15	105	109				**104/101Q	109T	109S,104/101S	105S,104/101S						
	225/75R16	104	108					115/112S	108S,115/112S	110/107Q			103/100Q			
	235/75R16	108	112						112S							
	245/75R16	111	115				[P]109S	[P]112T	115,120/116S,108/110S	*120/116Q			108/104Q			120/116Q
	265/75R16	116	116						116S,123/120Q	123/120Q			112/109Q			123/120Q
	285/75R16	-	-					126/123R		*122/119Q						126/123Q
	315/75R16	-	-							121/118S						127/124Q
	235/75R17	109	-					109T								
	245/75R17	112	-					121/118S		*121/118Q						
	LT255/75R17	-	-													111/108Q
	285/75R17	-	-					121/118S								
80	195/80R15	96	100				**96H						96S,103/101L			
	215/80R15	102	106				**101S						102S,109/107L			
	205/80R16	100	104						104T							
	215/80R16	-	-				**103S						103S			120/117Q
	235/80R17	-	-													
85	235/85R16	-	-					120/116S	120/116Q			120/116Q				120/116Q
Metric	205R16	-	-							110/108R			106/104N,110/108N			
Flotation	30X9.50R15	96	104				**104Q	104S	104S	104S			104S	104N		104Q
	31X10.50R15	100	109				109S,**109Q	109S	109S	109S			109S	109N		109Q
	32X11.50R15	104	113					113R		113S			113S			
	33X12.50R15	100	108					108R		108S						108Q
	33X12.50R17	-	-							*114S						120Q
	33X12.50R20LT	-	-													114Q
	35X12.50R15	-	-					113R		113S						113Q
	35X12.50R17	-	-					121R								121Q
	35X12.50R18LT	-	-													123Q
	35X12.50R20	-	-					121R								121Q
	37X12.50R17	-	-							124S						124Q
	37X12.50R20LT	-	-													127Q



AZENIS FK510SUV

- Falken's latest generation ultra high performance summer tire, the AZENIS FK510 is designed for drivers of premium vehicles looking for excellent grip and outstanding performance.
- 4D Nano Design enables Falken engineers to optimize new high-performance compounds at the molecular level, enhancing both wear and wet weather traction.
- Featuring hybrid undertread materials, the FK510 delivers confidence-inspiring handling and stability.



Size	Ply Rating	Load Index & Speed Symbol	XL or RF	Sidewall Style	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
315 /35 R 20		110Y	○	BLK	TL	○	○	730	326	11.0	10.5 - 12.5	7.2
275 /40 R 20		106Y	○	BLK	TL	○	○	730	282	9.5	9.0 - 11.0	7.7
265 /45 R 20		108Y	○	BLK	TL	○	○	750	270	9.0	8.5 - 10.0	7.7
275 /45 R 20		110W	○	BLK	TL	○	○	760	277	9.0	8.5 - 10.5	7.7
235 /50 R 18		101Y	○	BLK	TL	○	○	697	248	7.5	6.5 - 8.5	7.9
255 /50 R 19		107Y	○	BLK	TL	○	○	743	269	8.0	7.0 - 9.0	7.9
235 /55 R 17		103W	○	BLK	TL		○	694	248	7.5	6.5 - 8.5	7.9
235 /55 R 18		104Y	○	BLK	TL		○	719	248	7.5	6.5 - 8.5	7.9
255 /55 R 18		109W	○	BLK	TL		○	743	269	8.0	7.0 - 9.0	7.9
255 /55 R 19		111W	○	BLK	TL		○	769	269	8.0	7.0 - 9.0	7.9
235 /60 R 18		107W	○	BLK	TL		○	745	244	7.0	6.5 - 8.5	7.9

AZENIS FK453CC

- For all drivers expecting high speed stability and good safety performance driving on SUV, especially CUV, combined with comfort.
- To achieve high speed handling and stability,new Falken high loaded silica hard tread compound has been adopted.
- 3 wide straight grooves evacuate water effectively.
- Low noise and good handling and stability are achieved by optimized land/sea ratio.

AZENIS FK453CC



Size	Load Index & Speed Symbol	XL or RF	Sidewall Style	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
315 /35 R20	110Y	○	BLK	TL	○	○	728	323	11.0	10.5 - 12.5	7.5
285 /35 R22	106W	○	BLK	TL	○	○	759	294	10.0	9.5 - 11.0	7.5
275 /40 R20	106Y	○	BLK	TL	○	○	725	283	9.5	9.0 - 11.0	8.1
275 /40 R20	106W	○	BLK	TL	○		728	282	9.5	9.0 - 11.0	8.1
295 /40 R20	110W	○	BLK	TL	○	○	744	305	10.5	10.0 - 11.5	7.7
275 /45 R19	108Y	○	BLK	TL	○	○	731	277	9.0	8.5 - 10.5	7.9
285 /45 R19	111W	○	BLK	TL	○	○	739	289	9.5	9.0 - 10.5	7.7
245 /45 R20	103W	○	BLK	TL	○	○	728	247	8.0	7.5 - 9.0	8.1
275 /45 R20	110W	○	BLK	TL	○	○	756	277	9.0	8.5 - 10.5	7.9
235 /50 R18	101V	○	BLK	TL	○	○	694	247	7.5	6.5 - 8.5	8.1
245 /50 R18	100Y		BLK	TL	○	○	703	257	7.5	7.0 - 8.5	8.1
255 /50 R19	107W	○	BLK	TL	○	○	738	270	8.0	7.0 - 9.0	8.1
265 /50 R19	110Y	○	BLK	TL	○	○	749	281	8.5	7.5 - 9.5	7.9
255 /50 R20	109W	○	BLK	TL	○	○	764	270	8.0	7.0 - 9.0	8.1
235 /55 R17	103W	○	BLK	TL	○	○	690	249	7.5	6.5 - 8.5	8.1
245 /55 R17	102W		BLK	TL	○	○	702	257	7.5	7.0 - 8.5	8.1
235 /55 R18	100V		BLK	TL	○	○	715	249	7.5	6.5 - 8.5	8.1
255 /55 R18	109W	○	BLK	TL	○	○	739	270	8.0	7.0 - 9.0	8.1
235 /55 R19	105W	○	BLK	TL	○	○	741	249	7.5	6.5 - 8.5	8.1
255 /55 R19	111V	○	BLK	TL	○	○	765	273	8.0	7.0 - 9.0	8.1
235 /60 R17	102V		BLK	TL	○	○	714	244	7.0	6.5 - 8.5	8.1
235 /60 R18	107W	○	BLK	TL	○	○	737	244	7.0	6.5 - 8.5	8.1
255 /60 R18	112W	○	BLK	TL	○	○	763	264	7.5	7.0 - 9.0	8.1
235 /65 R17	108V	○	BLK	TL	○	○	742	248	7.0	6.5 - 8.5	7.9



ZIEX S/TZ05

- ZIEX S/TZ05 is all season tire, especially for highway use for SUV and Pick-Up truck with "inch up"sizes in 20",22"&24"
- New tread compound enables better wear-resistance and grip performance.
- Enhance stiffness, water evacuation, and noise reduction.



ZIEX S/TZ05

Size	Ply Rating	Load Index & Speed Symbol	XL or RF	Sidewall Style	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width [code]		Tread Depth (mm)
										Measuring	Approved	
265 /35 R 22		102H	○	BLK	TL			749	264	9.5	9.0 - 10.5	10.4
295 /35 R 24		110H	○	BLK	TL			814	293	10.5	10.0 - 11.5	10.8
305 /35 R 24		112H	○	BLK	TL			823	304	11.0	10.0 - 12.0	10.8
275 /40 R 20		106H	○	BLK	TL	○	○	727	276	9.5	9.0 - 11.0	10.4
265 /40 R 22		106H	○	BLK	TL	○	○	771	270	9.5	9.0 - 10.5	10.4
285 /40 R 22		110H	○	BLK	TL			788	287	10.0	9.5 - 11.0	10.8
305 /40 R 22		114H	○	BLK	TL			803	310	11.0	10.0 - 12.0	10.8
275 /45 R 20		110H	○	BLK	TL	○	○	754	268	9.0	8.5 - 10.5	10.9
295 /45 R 20		114H	○	BLK	TL			770	295	10.0	9.5 - 11.0	10.8
285 /45 R 22		114H	○	BLK	TL			815	278	9.5	9.0 - 10.5	10.8
305 /45 R 22		118H	○	BLK	TL			831	302	10.0	9.5 - 11.5	10.8
245 /50 R 20		102H		BLK	TL			754	251	7.5	7.0 - 8.5	10.4
255 /50 R 20		109H	○	BLK	TL	○	○	766	259	8.0	7.0 - 9.0	10.4
265 /50 R 20		111H	○	BLK	TL	○	○	774	272	8.5	7.5 - 9.5	10.9
285 /50 R 20		116V	○	BLK	TL			794	295	9.0	8.0 - 10.0	8.1
305 /50 R 20		120H	○	BLK	TL	○	○	811	314	9.5	8.5 - 11.0	10.9
255 /55 R 18		109V	○	BLK	TL			737	263	8.0	7.0 - 9.0	8.1
245 /55 R 19		103H		BLK	TL			753	251	7.5	7.0 - 8.5	10.4
275 /55 R 20		117H	○	BLK	TL	○	○	809	279	8.5	7.5 - 9.5	10.9
235 /60 R 18		107V	○	BLK	TL			739	236	7.0	6.5 - 8.5	8.1
265 /60 R 18		110V		BLK	TL			775	272	8.0	7.5 - 9.5	9.2
255 /60 R 19		109H		BLK	TL			789	258	7.5	7.0 - 9.0	9.4
275 /60 R 20		115H		BLK	TL	○	○	838	279	8.0	7.5 - 9.5	10.0



ZIEX S/TZ04

- Reversible side wall with white lettering or black lettering.
- Suitable for highway and paved road use.



ZIEX S/TZ04

Size	Ply Rating	Load Range	Load Index & Speed Symbol	XL or RF	Sidewall Style	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width [code]		Tread Depth (mm)
											Measuring	Approved	
*295 /30 R22			103W	○	BLK	TL		○	740	293	10.5	10.0 -11.0	8.0
275 /45 R22			112H	○	BLK	TL	○		807	273	9.0	8.5 -10.5	10.8
P275 /45 R20			106H			TL	○		757	265	9.0	8.5 -10.0	11.0
P305 /45 R22			118H	○		TL	○		829	305	10.0	9.5 -11.5	10.8
285 /50 R20			112H			TL	○		796	280	9.0	8.0 -10.0	10.8
295 /50 R20			118H	○		TL	○		806	304	9.5	8.0 -10.5	11.0
275 /55 R20			117H	○		TL	○		814	282	8.5	7.5 - 9.5	11.0
P235 /60 R16			99H			TL	○		688	240	7.0	6.5 - 8.5	9.4
**235 /60 R16			100H			TL	○	○	688	240	7.0	6.5 - 8.5	9.4
*275 /60 R17			111H			TL	○		766	273	8.0	7.5 - 9.5	9.2
*265 /60 R18			110H			TL	○		779	269	8.0	7.5 - 9.5	9.1
275 /60 R18			113H			TL	○		792	272	8.2	7.5 - 9.5	10.3
285 /60 R18			116H			TL	○		799	292	8.5	8.0 -10.0	9.3
**215 /65 R16			98H			TL	○	○	686	214	6.5	6.0 - 7.5	9.3
P255 /65 R16			106S			TL	○		744	250	7.5	7.0 - 9.0	9.8
265 /65 R17			112H		OWL	TL	○		776	275	8.0	7.5 - 9.5	9.9
275 /65 R17			115H		OWL	TL	○		793	285	8.0	7.5 - 9.5	10.4
275 /65 R18			116T		OWL	TL	○		813	275	8.1	7.5 - 9.5	10.3
**205 /70 R15			95H		BLK	TL		○	670	208	6.0	5.0 - 7.0	9.2
**205 /70 R15			95S			TL	○	○	672	210	6.0	5.0 - 7.0	9.3
P255 /70 R15			108S		OWL	TL			743	261	7.5	6.5 - 8.5	9.8
P265 /70 R15			110S		OWL	TL			759	266	8.0	7.0 - 9.0	9.9
*265 /70 R15			110H			TL	○	○	756	267	8.0	7.0 - 9.0	9.9
P215 /70 R16			99S			TL	○		711	217	8.0	7.0 - 9.0	9.4
*215 /70 R16			99H			TL	○	○	711	217	6.5	5.5 - 7.0	9.4
P235 /70 R16			104S		OWL	TL			736	238	7.0	6.0 - 8.0	9.5
**235 /70 R16			106H		BLK	TL		○	737	236	7.0	6.0 - 8.0	9.5
P245 /70 R16			106S		OWL	TL			754	243	7.0	6.5 - 8.0	9.7
**245 /70 R16			107H			TL	○	○	752	243	7.0	6.5 - 8.0	9.7
P255 /70 R16			109S		OWL	TL			767	261	7.5	6.5 - 8.5	9.8
P265 /70 R16			111S		OWL	TL			783	270	8.0	7.0 - 9.0	9.9
*265 /70 R16			112H			TL	○	○	781	267	8.0	7.0 - 9.0	9.9
275 /70 R16			114S		OWL	TL		○	794	278	8.0	7.0 - 9.0	10.2
*275 /70 R16			114H		BLK	TL		○	792	278	8.0	7.0 - 9.0	10.3
P265 /70 R18			114S			TL	○		832	276	8.0	7.0 - 9.0	9.8
P245 /75 R16			109S		OWL	TL			777	252	7.0	6.5 - 8.0	10.2
**195 /80 R15			96H				○		690	198	5.5	5.0 - 6.5	9.1
**215 /80 R15			101S				○		724	217	6.0	5.5 - 7.0	9.3
**215 /80 R16			103S				○		751	215	6.0	5.5 - 7.0	9.3
**30X9.50 R15			104Q		OWL	TL		○	745	242	7.5	6.5 - 8.5	12.2
**31X10.50 R15			109Q		OWL	TL		○	770	269	8.5	7.0 - 9.0	12.2
31X10.50 R15LT		C	109S		OWL	TL			770	274	8.5	7.0 - 9.0	12.4
**LT235 /75 R15		C	104/101Q		OWL	TL		○	745	237	6.5	6.0 - 8.0	12.4

*: ZIEX S/TZ01, **: LA/T110



ZIEX S/TZ01



LA/T110



WILDPEAK AT3W

- The WILDPEAK A/T3W is engineered for adventure, any time and in any weather.
- The A/T3W combines aggressive off-road ability and rugged terrain driving without compromise on the pavement.
- An optimized tread design combined with a silica tread compound enable the A/T3W to excel in three areas: wear, winter, and wet performance.



Size	Ply Rating	Load Index & Speed Symbol	XL or RF	Sidewall Style	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
265 /60 R18		114T	○	BLT	TL			776	267	8.0	7.5 - 9.5	10.3
245 /65 R17		111T	○	BLT	TL			750	246	7.0	7.0 - 8.5	10.3
255 /65 R17		114T	○	BLT	TL			764	262	7.5	7.0 - 9.0	10.3
265 /65 R17		116T	○	BLT	TL			776	269	8.0	7.5 - 9.5	10.3
235 /70 R16		109T	○	BLT	TL			736	238	7.0	6.0 - 8.0	10.3
255 /70 R16		115T	○	BLT	TL			764	260	7.5	6.5 - 8.5	10.3
265 /70 R16		112T		BLT	TL			778	274	8.0	7.0 - 9.0	10.8
265 /70 R18		116T		BLT	TL			829	274	8.0	7.0 - 9.0	10.8
235 /75 R15		109T	○	BLT	TL			735	230	6.5	6.0 - 8.0	10.9
30X9.50 R15LT		104S		BLT	TL			750	241	7.5	6.5 - 8.5	13.6
31X10.50 R15LT		109S		BLT	TL			775	264	8.5	7.0 - 9.0	14.1
32X11.50 R15LT		113R		BLT	TL			801	287	9.0	8.0 - 10.0	15.1
33X12.50 R15LT		108R		BLT	TL			826	317	10.0	8.5 - 11.0	15.6
35X12.50 R15LT		113R		BLT	TL			877	317	10.0	8.5 - 11.0	15.6
35X12.50 R17LT		121R		BLT	TL			883	317	9.5	8.5 - 11.0	15.6
35X12.50 R20LT		121R		BLT	TL			879	317	10.0	8.5 - 11.0	15.6
P245 /75 R16		112T	○	BLT	TL			774	248	7.0	6.5 - 8.0	10.3
LT285 /55 R20		122/119T		BLT	TL			822	285	9.0	8.0 - 10.0	14.6
LT305 /55 R20		121/118S		BLT	TL			844	312	9.5	8.5 - 11.0	15.1
LT265 /60 R20		121/118S		BLT	TL			826	259	8.0	7.5 - 9.5	14.1
LT325 /60 R20		126/123S		BLT	TL			898	325	9.5	9.0 - 12.0	15.6
LT275 /65 R18		123/120S		BLT	TL			815	273	8.0	7.5 - 9.0	14.6
LT285 /65 R18		125/122S		BLT	TL			827	287	8.5	8.0 - 10.0	14.6
LT305 /65 R18		124/121R		BLT	TL			853	304	9.0	8.5 - 11.0	15.1
LT325 /65 R18		127/124S		BLT	TL			879	331	9.5	9.0 - 12.0	15.6
LT275 /65 R20		126/123S		BLT	TL			866	270	8.0	7.5 - 9.5	14.6
LT305 /70 R16		124/121R		BLT	TL			834	307	9.0	8.0 - 9.5	15.1
LT245 /70 R17		119/116S		BLT	TL			782	248	7.0	6.5 - 8.0	13.6
LT265 /70 R17		121/118S		BLT	TL			810	273	8.0	7.0 - 8.5	14.1
LT285 /70 R17		121/118S		BLT	TL			838	294	8.5	7.5 - 9.0	14.6
LT315 /70 R17		121/118S		BLT	TL			880	323	9.5	8.0 - 11.0	15.6
LT275 /70 R18		125/122S		BLT	TL			849	280	8.0	7.0 - 8.5	14.6
LT225 /75 R16		115/112S		BLT	TL			744	215	6.0	6.0 - 7.0	13.1
LT245 /75 R16		120/116S		BLT	TL			774	242	7.0	6.5 - 8.0	13.6
LT265 /75 R16		123/120S		BLT	TL			804	263	7.5	7.0 - 8.0	14.1
LT285 /75 R16		126/123R		BLT	TL			834	283	8.0	7.5 - 9.0	14.6
LT245 /75 R17		121/118S		BLT	TL			805	242	7.0	6.5 - 7.5	13.6
LT285 /75 R17		121/118S		BLT	TL			860	283	8.0	7.5 - 9.5	14.6
LT235 /85 R16		120/116S		BLT	TL			806	231	6.5	6.0 - 7.5	13.6



WILDPEAK H/T01

- The first Falken real highway tire for SUV and Pick-Up trucks.
- Enhances safety performance, especially wet breaking on city road and highway, and economy, high mileage and anti-irregular wear.
- Provides ride comfort and quiet performance.



WILDPEAK H/T01

Size	Ply Rating	Load Range	Load Index & Speed Symbol	XL or RF	Sidewall Style	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
285 /50 R20			112V		BLT	TL			794	295	9.0	8.0 -10.0	8.2
235 /60 R16			100H		BLT	TL			688	238	7.0	6.5 - 8.5	9.5
235 /60 R17			102H		BLK	TL			715	235	7.0	6.5 - 8.5	10.5
235 /60 R18			107H	○	BLK	TL			740	235	7.0	6.5 - 8.5	10.5
255 /60 R18			112V	○	BLT	TL			763	258	7.5	7.0 - 9.0	9.3
265 /60 R18			110H		BLT	TL			775	263	8.0	7.5 - 9.5	9.8
285 /60 R18			116H		BLT	TL			799	290	8.5	8.0 -10.0	10.0
225 /65 R17			102H		BLT	TL			724	226	6.5	6.0 - 8.0	8.9
235 /65 R17			104T		BLT	TL	○	○	740	237	7.0	6.5 - 8.5	9.1
235 /65 R17			108H	○	BLT	TL			738	238	7.0	6.5 - 8.5	9.0
245 /65 R17			107S		OWL	TL	○	○	749	246	7.0	7.0 - 8.5	9.2
265 /65 R17			112S		BLT	TL	○	○	773	272	8.0	7.5 - 9.5	9.4
275 /65 R17			115H		BLT	TL			790	277	8.0	7.5 - 9.5	9.4
285 /65 R17			116H		BLT	TL			799		8.5	8.0 -10.0	9.6
235 /65 R18			106H		BLK	TL			763	240	7.0	6.5 - 8.5	9.0
205 /70 R15			96T		BLT	TL			669	207	6.0	5.0 - 7.0	8.9
215 /70 R15			98H		BLT	TL			683	219	6.5	5.5 - 7.0	8.5
225 /70 R15			100S		BLT	TL			697	226	6.5	6.0 - 7.5	9.1
255 /70 R15			108H		BLK	TL		○	740	254	7.5	6.5 - 8.5	8.9
255 /70 R15			108T		BLT	TL			739	258	7.5	6.5 - 8.5	9.4
265 /70 R15			112H		BLT	TL		○	753	270	8.0	7.0 - 9.0	8.9
215 /70 R16			100S		BLT	TL	○	○	706	220	6.5	5.5 - 7.0	9.0
225 /70 R16			103T		BLT	TL	○	○	721	224	6.5	6.0 - 7.5	9.1
235 /70 R16			106S		BLT	TL	○	○	735	243	7.0	6.0 - 8.0	9.2
245 /70 R16			111T	○	BLK	TL			750	246	7.0	6.5 - 8.0	9.3
255 /70 R16			111S		BLT	TL	○	○	765	257	7.5	6.5 - 8.5	9.4
265 /70 R16			112S		BLT	TL	○	○	774	272	8.0	7.0 - 9.0	9.5
275 /70 R16			114H		BLT	TL			793	276	8.0	7.0 - 9.0	8.9
245 /70 R17			110S		BLT	TL	○	○	777	246	7.0	6.5 - 8.0	9.3
265 /70 R17			115S		BLT	TL	○	○	801	273	8.0	7.0 - 9.0	9.5
225 /75 R15			102S		OWL	TL	○	○	718	220	6.0	6.0 - 7.5	9.1
235 /75 R15			109S	○	OWL	TL	○	○	731	234	6.5	6.0 - 8.0	9.2
225 /75 R16			108S	○	OWL	TL	○	○	743	221	6.0	6.0 - 7.5	9.1
235 /75 R16			112S	○	BLT	TL	○	○	756	232	6.5	6.0 - 8.0	9.2
245 /75 R16			111S		OWL	TL	○	○	772	247	7.0	6.5 - 8.0	9.3
265 /75 R16			116S		BLT	TL	○	○	802	269	7.5	7.0 - 9.0	9.5
30X 9.50 R15LT		C	104S		OWL	TL	○	○	751	243	7.5	6.5 - 8.5	12.2
31X10.50 R15LT		C	109S		OWL	TL	○	○	776	273	8.5	7.0 - 9.0	12.2
LT265 /70 R17		E	121/118S		OWL	TL	○	○	806	276	8.0	7.0 - 8.5	13.0
LT235 /75 R15		C	104/101S		OWL	TL	○	○	732	234	6.5	6.0 - 7.0	12.5
LT225 /75 R16		E	115/112S		BLT	TL	○	○	745	219	6.0	6.0 - 7.0	12.0
LT245 /75 R16		E	120/116S		BLT	TL	○	○	774	248	7.0	6.5 - 8.0	12.5
LT245 /75 R16		C	108/104S		BLT	TL	○	○	774	248	7.0	6.5 - 8.0	12.5
LT265 /75 R16		E	123/120Q		BLT	TL	○	○	804	269	7.5	7.0 - 8.0	13.0
LT235 /85 R16		E	120/116Q		BLT	TL	○	○	807	233	6.5	6.0 - 7.5	13.0



WILDPEAK A/T01

- The all-terrain tire, optimally balanced for both on and off roads performances.
- Well-acceptable appearance with sophisticated tread and sidewall design.



WILDPEAK A/T01

Size	Ply Rating	Load Range	Load Index & Speed Symbol	XL or RF	Sidewall Style	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
285 /50 R20			116T	○	BLK	TL			795	285	9.0	8.0 - 10.0	10.6
P275 /55 R20			111T		BLK	TL			809	277	8.5	7.5 - 9.5	10.1
215 /60 R17			96H			TL		○	691	219	6.5	6.0 - 7.5	8.2
285 /60 R18			116H		BLK	TL		○	802	289	8.5	8.0 - 10.0	9.1
285 /60 R18			120H	○		TL		○	802	290	8.5	8.0 - 10.0	9.1
275 /60 R20			115S		BLK	TL			840	276	8.0	7.5 - 9.5	10.1
255 /65 R16			109T			TL		○	737	262	7.5	7.0 - 9.0	10.1
235 /65 R17			104T			TL		○	738	238	7.0	6.5 - 8.5	10.1
245 /65 R17			111H	○	BLK	TL			750	252	7.0	7.0 - 8.5	8.6
255 /65 R17			110S		OWL	TL		○	764	259	7.5	7.0 - 9.0	10.1
265 /65 R17			112H			TL			776	277	8.0	7.5 - 9.5	8.6
265 /65 R17			112S			TL		○	776	270	8.0	7.5 - 9.5	10.1
275 /65 R17			115H			TL		○	791	279	8.0	7.5 - 9.5	9.5
255 /70 R15			108S			TL		○	735	260	7.5	6.5 - 8.5	10.1
265 /70 R15			112T			TL		○	751	278	8.0	7.0 - 9.0	10.1
215 /70 R16			100T			TL		○	708	218	6.5	5.5 - 7.0	9.6
235 /70 R16			106T			TL		○	734	245	7.0	6.0 - 8.0	9.6
245 /70 R16			107T			TL		○	750	252	7.0	6.5 - 8.0	9.6
245 /70 R16			107S		OWL	TL		○	751	250	7.0	6.5 - 8.0	9.7
265 /70 R16			112T		OWL	TL		○	774	276	8.0	7.0 - 9.0	10.1
265 /70 R16			112S		OWL	TL		○	773	270	8.0	7.0 - 9.0	10.1
275 /70 R16			114T			TL		○	790	282	8.0	7.0 - 9.0	10.6
275 /70 R16			114S		OWL	TL		○	789	280	8.0	7.0 - 9.0	10.7
P265 /70 R17			113S		BLK	TL			804	272	8.0	7.0 - 9.0	10.0
265 /70 R18			116S		OWL	TL		○	828	271	8.0	7.0 - 9.0	10.6
235 /75 R15			105S			TL		○	732	238	6.5	6.0 - 8.0	9.6
205 /80 R16			104T	○		TL		○	737	202	5.5	5.0 - 7.0	9.6
205 R16C			110/108R			TL		○	738	210	6.0	5.5 - 6.0	9.6
30X 9.50 R15LT	6PR		104S		OWL	TL		○	752	247	7.5	6.5 - 8.5	12.5
31X10.50 R15	6PR	C	109S		OWL	TL		○	772	277	8.5	7.0 - 9.0	13.0
32X11.50 R15LT	6PR	C	113S		OWL	TL		○	800	296	9.0	8.0 - 10.0	13.4
33X12.50 R15LT	6PR	C	108S		BLK	TL			825	324	10.0	8.5 - 11.0	13.9
35X12.50 R15LT		C	113S		BLK	TL			876	327	10.0	8.5 - 11.0	13.9
*33X12.50 R17LT	8PR	C	114S			TL			824	321	10.0	8.5 - 11.0	13.4
37X12.50 R17LT		D	124S		BLK	TL			928	318	10.0	8.5 - 11.0	13.9
*LT275 /65 R18	10PR		123/120Q		OWL	TL			815	275	8.0	7.5 - 9.5	13.0
*LT285 /65 R18	8PR		121/118S		OWL	TL			827	293	8.5	8.0 - 10.0	13.0
*LT245 /70 R16	8PR		113/110Q		OWL	TL			748	252	7.0	6.5 - 8.0	12.5
*LT265 /70 R16	8PR		117/114Q		OWL	TL			779	275	8.0	7.0 - 9.0	13.0
*LT305 /70 R16	10PR		124/120S		BLK	TL			832	315	9.0	8.0 - 9.5	13.9
*LT245 /70 R17	10PR		119/118Q		BLK	TL			778	244	7.0	6.5 - 8.0	12.5
*LT265 /70 R17	10PR		121/110S		BLK	TL			805	269	8.0	7.0 - 8.5	13.0
*LT285 /70 R17	8PR		121/118S		BLK	TL			831	291	8.5	7.5 - 9.0	13.4
LT315 /70 R17			121/118Q		BLK	TL			871	317	9.5	8.0 - 11.0	13.4
LT215 /75 R15		C	100/97S		OWL	TL		○	705	213	6.0	5.5 - 7.0	10.1
LT235 /75 R15		C	104/101S		OWL	TL		○	735	237	6.5	6.0 - 7.0	10.6
LT225 /75 R16			110/107Q		BLK	TL		○	745	218	6.0	6.0 - 7.0	12.0
*LT245 /75 R16	10PR	E	120/116Q		OWL	TL		○	769	253	7.0	6.5 - 8.0	12.5
LT265 /75 R16	10PR		123/120Q		OWL	TL			809	263	7.5	7.0 - 8.0	13.0
*LT285 /75 R16	8PR	D	122/119Q		OWL	TL		○	826	292	8.0	7.5 - 9.0	13.4
LT315 /75 R16			121/118S		BLK	TL			874	321	8.5	8.0 - 11.0	13.0
*LT245 /75 R17			121/118Q		BLK	TL			801	248	7.0	6.5 - 7.5	12.5

*: WILDPEAK A/T02



LA/CT03

- Tire designed for city use.
- Provides excellent steering response on paved roads, with a quiet ride.



Size	Ply Rating	Load Index & Speed Symbol	XL or RF	Sidewall Style	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
215 /65 R16		98S			TL			690	209	6.5	6.0 - 7.5	8.3
205 /70 R15		95S			TL			669	204	6.0	5.0 - 7.0	8.2
215 /70 R16		99S			TL			708	214	6.5	5.5 - 7.0	8.3

FK/AP

- Tire designed for all seasons.
- Tread design with sipes for excellent traction and stability in wet conditions.



Size	Ply Rating	Load Range	Load Index & Speed Symbol	XL or RF	Sidewall Style	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
LT215 /75 R15	6PR	C	100/97Q		OWL	TL		○	703	215	6.0	5.5 - 7.0	10.6
LT265 /75 R16		D			OWL	TL			804	266	7.5	7.0 - 8.0	13.1
LT235 /85 R16	10PR	E	120/116Q			TL			808	240	6.5	6.0 - 7.5	13.1

LA/AT

- All-round tire offers excellent performance on and off-road, in snow.
- High performance on paved roads, with excellent quietness.
- Also demonstrates superb performance in driving on dirt roads and sandy tracks.



Size	Ply Rating	Load Range	Load Index & Speed Symbol	XL or RF	Sidewall Style	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
205 R16	6PR	C	106/104N			TL		○	734	207	6.0	5.5 - 6.5	11.5
205 R16	8PR	D	110/108N			TL		○	734	207	6.0	5.5 - 6.5	11.5
265 /70 R15			110S			TL		○	755	268	8.0	7.0 - 9.0	10.0
215 /70 R16			99S			TL		○	703	206	6.0	5.5 - 7.0	8.5
245 /70 R16			107S			TL		○	750	240	7.0	6.5 - 8.0	9.8
265 /70 R16			112S			TL		○	779	268	8.0	7.0 - 9.0	10.2
275 /70 R16			114S			TL			785	275	8.0	7.0 - 9.0	9.9
195 /80 R15			96S			TL		○	695	193	5.5	5.0 - 6.5	9.0
215 /80 R15			102S			TL		○	724	218	6.0	5.5 - 7.0	10.5
215 /80 R16			103S			TL			751	215	6.0	5.5 - 7.0	10.7
30X 9.50 R15LT	6PR	C	104S		WLT	TL		○	752	250	7.5	6.5 - 8.5	13.0
31X10.50 R15LT	6PR	C	109S		WLT	TL		○	777	275	8.5	7.0 - 9.0	13.0
32X11.50 R15LT	6PR	C	113S		WLT	TL		○	802	298	9.0	8.0 - 10.0	13.5
LT225 /75 R16	6PR	C	103/100Q		WLT	TL		○	746	223	6.0	6.0 - 7.0	12.0
LT245 /75 R16	6PR	C	108/104Q		WLT	TL		○	776	248	7.0	6.5 - 7.5	12.5
LT265 /75 R16	6PR	C	112/109Q		WLT	TL		○	806	265	7.5	7.0 - 8.0	13.0
195 /80 R15LT			103/101L			TL			695	193	5.5	5.0 - 6.0	9.0
215 /80 R15LT		C	109/107L			TL			724	218	6.0	5.5 - 7.0	10.5



FK/AT

- Can be used in both on and off-road conditions.
- Provides high stability under a wide variety of conditions.



Size	Ply Rating	Load Range	Load Index & Speed Symbol	XL or RF	Sidewall Style	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
LT235 /85 R16	10PR				BLK	TL		○	812	235	6.5	6.0 - 7.5	10.6

LA/TA

- Designed for off-road conditions.
- Excellent performance, with self-cleaning tread design that removes mud and snow to provide traction and skid resistance.



Size	Ply Rating	Load Index & Speed Symbol	XL or RF	Sidewall Style	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
30X 9.50 R15LT	6PR	104N		OWL	TL		○	750	254	7.5	6.5 - 8.5	13.5
31X10.50 R15LT	6PR	109N		OWL	TL		○	776	274	8.5	7.0 - 9.0	13.5

ZIEX CT50A/S

- Provides the outstanding handling stability, refined riding comfort and quiet drive performance.
- Achieves superior fuel economy performance.
- OE fitment pattern.



Size	Ply Rating	Load Index & Speed Symbol	XL or RF	Sidewall Style	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
P255 /50 R20		104V		BLK	TL		○	765	270	8.5	7.0 - 9.0	8.2
255 /50 R20		105V		BLK	TL		○	765	270	8.5	7.0 - 9.0	8.2

WILDPEAK MT01

- Trusted by the pros to take on the harshest conditions, the tough WILDPEAK M/T is built to get you there and back whether you're on the pavement, mud, snow or rocks.
- The M/T features Falken's proprietary three-ply DURASPEC™ Sidewall Technology developed to sustain the most punishing off-road conditions.



Size	Ply Rating	Load Index & Speed Symbol	XL or RF	Sidewall Style	TL	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
30X 9.50 R15LT		104Q		BLK	TL			751	245	7.5	6.5 - 8.5	15.0
31X10.50 R15LT		109Q		BLK	TL			781	266	8.5	7.0 - 9.0	15.0
33X12.50 R15LT		108Q		BLK	TL			829	331	10.0	8.5 - 11.0	16.4
33X12.50 R17LT		120Q		BLK	TL			831	318	10.0	8.5 - 11.0	16.4
33X12.50 R20LT		114Q		BLK	TL			833	322	10.0	8.5 - 11.0	16.4
35X12.50 R15LT		113Q		BLK	TL			876	328	10.0	8.5 - 11.0	16.4
35X12.50 R17LT		121Q		BLK	TL			883	331	10.0	8.5 - 11.0	16.4
35X12.50 R18LT		123Q		BLK	TL			881	330	10.0	8.5 - 11.0	16.5
35X12.50 R20LT		121Q		BLK	TL			883	321	10.0	8.5 - 11.0	16.4
37X12.50 R17LT		124Q		BLK	TL			932	328	10.0	8.5 - 11.0	16.4
37X13.50 R20LT		127Q		BLK	TL			933	345	11.0	8.5 - 11.0	16.4
LT305 /55 R20		121/118Q		BLK	TL			847	314	9.5	8.5 - 11.0	15.4
LT285 /65 R18		125/122Q		BLK	TL			833	295	8.5	8.0 - 10.0	14.9
LT265 /70 R17		121/118Q		BLK	TL			805	269	8.0	7.0 - 8.5	15.0
LT285 /70 R17		121/118Q		BLK	TL			835	290	8.5	7.5 - 9.0	15.5
LT295 /70 R17		121/118Q		BLK	TL			848	298	8.5	7.5 - 10.0	16.0
LT315 /70 R17		121/118Q		BLK	TL			880	325	9.5	8.0 - 11.0	15.8
LT275 /70 R18		125/122Q		BLK	TL			848	278	8.0	7.0 - 8.5	15.5
LT245 /75 R16		120/116Q		BLK	TL			773	253	7.0	6.5 - 8.0	14.5
LT265 /75 R16		123/120Q		BLK	TL			814	270	7.5	7.0 - 8.0	15.0
LT285 /75 R16		126/123Q		BLK	TL			831	292	8.0	7.5 - 9.0	15.5
LT315 /75 R16		127/124Q		BLK	TL			881	321	8.5	8.0 - 11.0	16.5
LT255 /75 R17		111/108Q		BLK	TL			820	258	7.0	6.5 - 8.5	14.4
LT235 /80 R17		120/117Q		BLK	TL			814	233	6.5	6.0 - 7.5	13.9
LT235 /85 R16		120/116Q		BLK	TL			808	235	6.5	6.0 - 7.5	14.4

FALKEN

LIGHT TRUCK TIRES



This is just a sample image.



LIGHT TRUCK TIRES

SAFETY WARNING

SERIOUS INJURY OR DEATH MAY RESULT FROM EXPLOSION OF TIRE/RIM ASSEMBLY, IF PROPER MOUNTING INSTRUCTIONS ARE NOT FOLLOWED.

*ONLY specially trained persons should mount tires.

*ALWAYS match rim diameter with tire diameter.

*NEVER mount a tire on a cracked, bent, rusted or otherwise damaged rim or a rim which has been repaired.

*NEVER put a flammable substance into a tire.

*ALWAYS clean and lubricate the rim and tire beads.

*ALWAYS use an extension air hose with gauge and clip-on air chunk.

*ALWAYS lock the wheel on the tire mounting machine, or place it in a safaty cage when inflating.

*ALWAYS stand clear, and NEVER lean or reach over the tire/rim assembly when inflating.

*NEVER inflate over 40 psi (275 kPa) to seat bead.

*ALWAYS adjust tire pressure to the vehicle manufacturer's recommendations after beads are fully seated.



RI-103

- General purpose, all-position tires for highway service.
- Long service life and excellent steering stability.



Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
7.00 R15	10PR	111/109M		○	OHTSU	752	198	5.5	5.5	11.0
6.50 R16C	10PR	108/107M		○	OHTSU	752	189	5.5	4.5,5.5	10.5
6.50 R16	10PR	109/107M			OHTSU	752	189	5.5	4.5,5.5	10.5
7.00 R16		117N			OHTSU					
*7.50 R16	12PR				OHTSU	805	212	6.0	6.0	11.5
*7.50 R16		121N			OHTSU					

*:R1300

LINAM VAN01

- Enhanced durability provided by the sidewall protection band.
- Longer-lasting performance throughout the life of the tire.
- Maximised road contact area through 4D-Nano Design technology.



Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
215 /60 R16C		103/101T	TL	○		664	219	6.5	6.0 - 7.0	8.2
205 /65 R15C		102/100T	TL	○		646	207	6.0	5.5 - 6.5	8.2
195 /65 R16C		104/102T	TL	○		658	199	6.0	5.5 - 6.0	8.2
205 /65 R16C		107/105T	TL	○		671	207	6.0	5.5 - 6.5	8.6
215 /65 R16C		109/107T	TL	○		685	219	6.5	6.0 - 7.0	8.6
225 /65 R16C		112/110T	TL	○		697	226	6.5	6.0 - 7.0	9.1
235 /65 R16C		115/113R	TL	○		711	239	7.0	6.5 - 7.5	9.1
195 /70 R15C		104/102S	TL	○		655	199	6.0	5.0 - 6.0	8.2
205 /70 R15C		106/104R	TL	○		669	207	6.0	5.5 - 6.5	8.2
215 /70 R15C		109/107S	TL	○		683	219	6.5	5.5 - 7.0	8.6
225 /70 R15C		112/110S	TL	○		697	226	6.5	6.0 - 7.0	9.1
195 /75 R16C		107/105T	TL	○		698	194	5.5	5.0 - 6.0	8.6
205 /75 R16C		113/111R	TL	○		714	201	5.5	5.5 - 6.5	9.1
215 /75 R16C		116/114R	TL	○		728	214	6.0	5.5 - 7.0	9.6
225 /75 R16C		118/116R	TL	○		744	221	6.0	6.0 - 7.0	9.6
185 R14C		102/100R	TL	○		650	186	5.5	5.0 - 6.0	8.2
195 R14C		106/104R	TL	○		666	196	5.5	5.0 - 6.0	8.2

GI-377

- Rib/lug pattern designed for all-position highway use.
- Excellent traction, long mileage, and enhanced resistance to irregular wear.



GI-377

Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
7.50 R16		122/120L			FALKEN	808	217	6.0	6.0	14.9
7.50 R16	14PR				FALKEN	809	213	6.0	6.0	15.1
*8.25 R16	14PR				OHTSU	857	233	6.5	6.0,6.5	15.5

*:GI327



GI327



LINAM R51

- Designed for vans and light trucks, featuring a six-rib pattern.
- Excellent wear resistance, durability and performance in wet conditions.



LINAM R51

R2

Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
145 R12C	6PR	81/79P	TL	○	FALKEN	540	141	4.0	3.5 - 4.5	7.4
155 R12C	6PR	83/81P	TL	○	FALKEN	552	159	4.5	4.0 - 5.0	7.7
155 R12C	8PR	88/86P	TL	○	FALKEN	552	159	4.5	4.0 - 5.0	7.7
155 R13C	6PR	85/83P	TL	○	FALKEN	579	160	4.5	4.0 - 5.0	7.7
165 R13C	6PR	91/89P	TL	○	FALKEN	595	169	4.5	4.0 - 5.0	8.0
165 R13C	8PR	94/92P	TL	○	FALKEN	595	169	4.5	4.0 - 5.0	8.0
175 R13C	6PR	94/92P	TL	○	FALKEN	608	179	5.0	4.5 - 5.5	8.3
175 R13C	8PR	97/95P	TL	○	FALKEN	608	179	5.0	4.5 - 5.5	8.3
165 R14C	6PR	93/91P	TL	○	FALKEN	622	168	4.5	4.0 - 5.0	8.0
165 R14C	8PR	97/95P	TL	○	FALKEN	622	168	4.5	4.0 - 5.0	8.0
175 R14C	8PR	99/98P	TL	○	FALKEN	634	180	5.0	4.5 - 5.5	8.3
185 R14C	6PR	99/97P	TL	○	FALKEN	648	190	5.5	5.0 - 6.0	9.2
185 R14C	8PR	102/100P	TL	○	FALKEN	650	188	5.5	5.0 - 6.0	9.2
195 R14C	8PR	106/104P	TL	○	FALKEN	667	196	5.5	5.0 - 6.0	9.2
*195 R15C	8PR	106/104R	TL		OHTSU	691	197	5.5	5.0 - 6.0	9.6
*195 R15	8PR		TL		OHTSU	691	198	5.5	5.0 - 6.0	9.6
195 /60 R16C		99/97T	TL	○	FALKEN	638	196	6.0	5.5 - 6.5	9.6
175 /65 R14C		90/88T	TL	○	FALKEN	583	171	5.0	5.0 - 5.5	9.1
205 /65 R15C		102/100T	TL	○	FALKEN	647	206	6.0	5.5 - 6.5	9.6
195 /65 R16C		104/102T	TL	○	FALKEN	659	197	6.0	5.0 - 6.0	9.6
205 /65 R16C		107/105T	TL	○	FALKEN	671	204	6.0	5.5 - 6.5	9.6
215 /65 R16C		106/104S	TL		FALKEN	688	216	6.5	6.0 - 7.0	9.6
225 /65 R16C		112/110T	TL	○	FALKEN	696	225	6.5	6.0 - 7.0	10.1
165 /70 R14C		89/87R	TL	○	FALKEN	586	167	5.0	4.5 - 5.0	9.1
195 /70 R15C		104/102R	TL	○	FALKEN	654	190	6.0	5.0 - 6.0	10.1
205 /70 R15C		106/104R	TL		FALKEN	669	207	6.0	5.0 - 6.5	10.1
215 /70 R15C		109/107S	TL		FALKEN	685	218	6.5	5.5 - 7.0	10.1
225 /70 R15C		112/110R	TL	○	FALKEN	696	226	6.5	6.0 - 7.0	10.8
215 /70 R16C		108/106S	TL		FALKEN	709	218	6.5	5.5 - 7.0	10.1
185 /75 R16C		104/102R	TL	○	FALKEN	692	181	5.0	5.0 - 6.0	11.0
195 /75 R16C		107/105T	TL	○	FALKEN	705	192	5.5	5.0 - 6.0	11.0
205 /75 R16C		110/108R	TL	○	FALKEN	721	198	5.5	5.5 - 6.5	11.0
215 /75 R16C		113/111R	TL		FALKEN	726	216	6.0	5.5 - 7.0	10.6

*:R2



RI-153

- Rib pattern designed for light trucks.
- Excellent wear resistance.



Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
195 /70 R15.5		109/107L	TL	○	FALKEN	662	195	6.0	5.0 - 6.0	10.1

FALKEN

TRUCK AND BUS TIRES



This is just a sample image.

TRUCK AND BUS TIRES

⚠ SAFETY WARNING

SERIOUS INJURY OR DEATH MAY RESULT FROM EXPLOSION OF TIRE/RIM ASSEMBLY, IF PROPER MOUNTING INSTRUCTIONS ARE NOT FOLLOWED.

- ***ONLY** specially trained persons should mount tires.
- ***ALWAYS** match rim diameter with appropriate tire size.
- ***NEVER** mount a tire on a cracked, bent, rusted or otherwise damaged rim or a rim which has been repaired.
- ***ALWAYS** make sure inside of tire is dry before mounting. Moisture in a tire can damage the casing.
- ***NEVER** put a flammable substance into a tire.
- ***ALWAYS** clean and lubricate the rim and tire beads.
- ***ALWAYS** use an extension air hose with gauge and clip-on air chuck.
- ***ALWAYS** inflate with dry air from compressor having properly-working moisture filter.
- ***ALWAYS** stand clear and **NEVER** lean or reach over the tire/rim assembly when inflating.
- ***NEVER** inflate over 40 psi (275 kPa) to seat bead.
- ***ALWAYS** adjust tire pressure to the vehicle manufacturer's recommendations after beads are fully seated.



FALKEN
TRUCK and BUS TIRES
2018

TRUCK and BUS TIRES APPLICATION For Asia *not for all countries by tire standard and specifications.

CATEGORY		ON ROAD										ON-OFF ROAD				OFF ROAD
		RI-117	RI-128	RI150	RI151	BI850	BI-867	BI-807D	RI-188	GI-327	GI-377	GI-337	GI-347	GI-388	GI-307	LI-257
PATTERN																
Application for Truck	Steer	○	○	○	○				○	○						
	All position	○	○	○	○				○	○	○	○	○	○	○	
	Drive					○	○	○								○
Application for Bus type	Trailer	○	○	○	○				○							
	InCity															
	Intercity															
Distance	Long	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Middle	○	○		○		○		○	○	○	○	○	○	○	○
	Short	○	○								○	○	○	○		○
Tubeless	8.5R17.5															
	9.5R17.5	○														
	10R17.5															
	225/90R17.5									○						
	225/80R17.5										○			○		
	205/75R17.5															
	215/75R17.5		○		○											
	225/75R17.5															
	235/75R17.5		○													
	245/70R17.5															
	8R19.5															
	225/70R19.5															
	245/70R19.5		○													
	265/70R19.5		○		○											
	285/70R19.5															
	425/55R19.5															
	9R22.5															
	10R22.5		○	○												
	11R22.5		○	○		○	○			○	○			○		
	12R22.5	○		○			○	○	○				○	○		○
	13R22.5														○	
	275/80R22.5															
	295/80R22.5	○	○		○	○	○									
	315/80R22.5	○	○		○		○							○	○	○
	245/75R22.5															
	295/75R22.5															
	255/70R22.5	○	○													
	275/70R22.5		○	○												
	315/70R22.5		○													
	385/65R22.5	○	○													
	425/65R22.5															
	445/65R22.5															
	295/60R22.5															
	315/60R22.5															
	265/60R22.5															
	385/55R22.5															
	11R24.5															
	12R24.5															
	285/75R24.5															
Tube Type	7.50R15															
	8.25R15															
	10.00R15															
	7.50R16										○					
	8.25R16									○						
	7.50R18															
	8.25R20															
	9.00R20															
	10.00R20		○									○				
	11.00R20												○			
	12.00R20															
	365/80R20	○														
	11.00R22															
	11.00R24															
	12.00R24														○ EX	
	325/95R24 (TL)															

○ EX=GI307EX

TRUCK and BUS TIRES APPLICATION For Middle East *not for all countries by tire standard and specifications.

CATEGORY		ON ROAD									
		RI-117	RI-128	RI150	RI151	BI-807D	BI-851	BI-867	GI-327	GI-377	MI-527
PATTERN											
Application for Truck	Steer	○	○	○	○				○		○
	All position	○	○	○	○				○	○	○
	Drive					○	○	○			
Application for Bus type	Trailer	○	○	○	○						
	InCity										
Distance	Intercity										
	Long	○	○	○	○	○	○	○			○
	Middle	○	○		○		○	○	○	○	○
Tubeless	Short	○	○						○	○	○
	8.5R17.5	○			○						○
	9.5R17.5	○			○						
	10R17.5										
	225/90R17.5								○		
	225/80R17.5									○	
	205/75R17.5				○						
	215/75R17.5		○		○		○	○			
	225/75R17.5										
	235/75R17.5		○		○		○				
	245/70R17.5				○						
	8R19.5										
	225/70R19.5										
	245/70R19.5		○		○						
	265/70R19.5		○		○						○
	285/70R19.5		○								
	425/55R19.5										
	9R22.5										
	10R22.5		○								
	11R22.5		○	○		○			○		
	12R22.5	○				○					
	13R22.5										
	275/80R22.5										
	295/80R22.5	○	○		○			○			○
	315/80R22.5	○	○		○			○			
	245/75R22.5										
	295/75R22.5										
	255/70R22.5	○		○							
	275/70R22.5		○	○							
	315/70R22.5		○		○			○			
	385/65R22.5	○	○		○						
	425/65R22.5										
	445/65R22.5										
	295/60R22.5										
	315/60R22.5		○								
	265/60R22.5										
	385/55R22.5		○								
Tube Type	11R24.5										
	12R24.5										
	285/75R24.5										
	7.50R15										
	8.25R15										
	10.00R15										
	7.50R16								○		
	8.25R16								○		
	7.50R18										
	8.25R20										
	9.00R20		○								
	10.00R20		○	○							
	11.00R20										
	12.00R20										
	365/80R20	○									
	11.00R22										
	11.00R24										
	12.00R24		○	○							
	325/95R24 (TL)										

CATEGORY		ON ROAD			ON-OFF ROAD						OFF ROAD	
		R1200	R3500	MI-577	RI-129	GI-307	R3100	GI-337	GI-347	GI-388	R3200	LI-257
PATTERN												
Application for Truck	Steer	○	○									
	All position	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
	Drive											⊙
	Trailer											
Application for Bus type	InCity											
	Intercity											
Distance	Long											
	Middle	⊙	⊙	○	⊙	⊙	⊙	○	○	○		○
	Short			⊙				⊙	⊙	⊙	⊙	⊙
Tubeless	8.5R17.5											
	9.5R17.5											
	10R17.5											
	225/90R17.5			○								
	225/80R17.5											
	205/75R17.5											
	215/75R17.5											
	225/75R17.5											
	235/75R17.5											
	245/70R17.5											
	8R19.5											
	225/70R19.5											
	245/70R19.5											
	265/70R19.5											
	285/70R19.5											
	425/55R19.5											
	9R22.5											
	10R22.5		○									
	11R22.5	○									○	
	12R22.5	○*							○			
	13R22.5					○				○		○
	275/80R22.5											
	295/80R22.5											
	315/80R22.5				○	○				○		○
	245/75R22.5											
	295/75R22.5											
	255/70R22.5											
	275/70R22.5											
	315/70R22.5											
	385/65R22.5											
	425/65R22.5											
	445/65R22.5											
	295/60R22.5											
	315/60R22.5											
	265/60R22.5											
	385/55R22.5											
	11R24.5											
12R24.5												
285/75R24.5												
Tube Type	7.50R15											
	8.25R15											
	10.00R15											
	7.50R16											
	8.25R16											
	7.50R18											
	8.25R20											
	9.00R20	○	○									
	10.00R20							○				
	11.00R20	○							○			
	12.00R20				○		○			○		
	365/80R20											
	11.00R22											
	11.00R24											
	12.00R24				○	○ EX				○		
325/95R24 (TL)				○					○			

○*=R1200D ○ EX=GI307/EX

CATEGORY		ON ROAD									
		RI-117	RI-128	RI150	RI151	BI-807D	BI-851	BI-867	RI-177	RI-188	GI-327
PATTERN											
Application for Truck	Steer	○	○	○	○				○	○	○
	All position	○	○	○	○				○	○	○
	Drive					○	○	○			
	Trailer	○	○	○	○					○	
Application for Bus type	InCity										
	Intercity										
Distance	Long	○	○	○	○	○	○	○		○	
	Middle	○	○		○		○	○	○	○	○
	Short	○	○								
Tubeless	8.5R17.5	○			○						
	9.5R17.5	○			○						
	10R17.5										
	225/90R17.5										○
	225/80R17.5										
	205/75R17.5				○	○					
	215/75R17.5		○		○	○	○				
	225/75R17.5										
	235/75R17.5		○		○	○					
	245/70R17.5				○						
	8R19.5										
	225/70R19.5										
	245/70R19.5		○		○						
	265/70R19.5		○		○						
	285/70R19.5		○								
	425/55R19.5										
	9R22.5										
	10R22.5		○	○							
	11R22.5		○	○				○			○
	12R22.5	○		○		○			○		
	13R22.5										
	275/80R22.5										
	295/80R22.5	○	○		○			○			
	315/80R22.5	○	○		○			○			
	245/75R22.5										
	295/75R22.5										
	255/70R22.5	○		○							
	275/70R22.5		○								
	315/70R22.5		○		○			○			
	385/65R22.5	○	○		○						
	425/65R22.5										
	445/65R22.5										
	295/60R22.5										
	315/60R22.5		○								
	265/60R22.5										
	385/55R22.5				○						
	11R24.5										
	12R24.5										
	285/75R24.5										
	7.50R15										
	8.25R15										
	10.00R15										
	7.50R16										
	8.25R16										○
	7.50R18										
	8.25R20										
Tube Type	9.00R20		○								
	10.00R20		○	○							
	11.00R20										
	12.00R20							○			
	365/80R20	○									
	11.00R22										
	11.00R24										
	12.00R24		○	○							
	325/95R24 (TL)										

○ EX=GI307EX

CATEGORY		ON ROAD			ON-OFF ROAD				OFF ROAD	
		GI-377	R1200	R3500	GI-307	R3100	RI-129	GI-347	GI-388	LI-257
PATTERN										
Application for Truck	Steer		○	○						
	All position	○	○	○	○	○	○	○	○	
	Drive									○
	Trailer									
Application for Bus type	InCity									
	Intercity									
Distance	Long									
	Middle	○	○	○	○	○	○	○	○	○
	Short	○						○	○	○
Tubeless	8.5R17.5									
	9.5R17.5									
	10R17.5									
	225/90R17.5									
	225/80R17.5	○								
	205/75R17.5									
	215/75R17.5									
	225/75R17.5									
	235/75R17.5									
	245/70R17.5									
	8R19.5									
	225/70R19.5									
	245/70R19.5									
	265/70R19.5								○	
	285/70R19.5									
	425/55R19.5									
	9R22.5									
	10R22.5			○						
	11R22.5	○	○						○	
	12R22.5							○	○	○
	13R22.5				○				○	○
	275/80R22.5									
	295/80R22.5									
	315/80R22.5				○		○		○	○
	245/75R22.5									
	295/75R22.5									
	255/70R22.5									
	275/70R22.5									
	315/70R22.5									
	385/65R22.5									
	425/65R22.5									
	445/65R22.5									
	295/60R22.5									
	315/60R22.5									
	265/60R22.5									
	385/55R22.5									
	11R24.5									
	12R24.5									
	285/75R24.5									
	7.50R15									
	8.25R15									
	10.00R15									
	7.50R16	○								
	8.25R16									
	7.50R18									
	8.25R20									
Tube Type	9.00R20			○						
	10.00R20		○							
	11.00R20		○					○		
	12.00R20					○	○		○	
	365/80R20									
	11.00R22									
	11.00R24									
	12.00R24				○ EX				○	
	325/95R24 (TL)								○	

CATEGORY		ON ROAD									
		RI-117	RI-128	RI150	RI151	BI850	BI-851	BI-867	BI-807D	RI-188	GI-327
PATTERN											
Application for Truck	Steer	⊙	○	⊙	○					○	○
	All position	○	○	○	○					⊙	⊙
	Drive					⊙	⊙	⊙	⊙		
	Trailer	○	○	○	○					○	
Application for Bus type	InCity										
	Intercity										
Distance	Long	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	○	
	Middle	○	○		○		○	○		⊙	⊙
	Short	○	○								
Tubeless	8.5R17.5	○									
	9.5R17.5										
	10R17.5										
	225/90R17.5										
	225/80R17.5										
	205/75R17.5						○				
	215/75R17.5		○		○		○				
	225/75R17.5						○				
	235/75R17.5				○		○				
	245/70R17.5										
	8R19.5										
	225/70R19.5										
	245/70R19.5										
	265/70R19.5										
	285/70R19.5										
	425/55R19.5										
	9R22.5										
	10R22.5		○								
	11R22.5		○	○		○		○			
	12R22.5	○		○					○	○	
	13R22.5										
	275/80R22.5		○								
	295/80R22.5		○		○	○		○			
	315/80R22.5	○	○		○						
	245/75R22.5										
	295/75R22.5										
	255/70R22.5	○	○	○							
	275/70R22.5		○	○							
	315/70R22.5										
	385/65R22.5		○		○						
	425/65R22.5										
	445/65R22.5										
	295/60R22.5										
	315/60R22.5										
	265/60R22.5										
	385/55R22.5										
	11R24.5		○			○					
	12R24.5										
	285/75R24.5							○			
	7.50R15										
	8.25R15										
	10.00R15										
	7.50R16										
	8.25R16										○
	7.50R18										
	8.25R20										
Tube Type	9.00R20		○								
	10.00R20		○	○							
	11.00R20										
	12.00R20										
	365/80R20										
	11.00R22										
	11.00R24										
	12.00R24										
	325/95R24 (TL)										

○ EX=GI307EX

CATEGORY		ON ROAD			ON-OFF ROAD					OFF ROAD
		GI-377	GI-378	R1200	GI-307	GI-337	GI-347	GI-388	R3200	LI-257
PATTERN										
Application for Truck	Steer			○						
	All position	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
	Drive									⊙
	Trailer									
Application for Bus type	InCity									
	Intercity									
Distance	Long									
	Middle	⊙	⊙	⊙	⊙	○	○	○		○
	Short	○				⊙	⊙	⊙	⊙	⊙
Tubeless	8.5R17.5									
	9.5R17.5									
	10R17.5									
	225/90R17.5									
	225/80R17.5									
	205/75R17.5									
	215/75R17.5									
	225/75R17.5									
	235/75R17.5									
	245/70R17.5									
	8R19.5									
	225/70R19.5									
	245/70R19.5									
	265/70R19.5									
	285/70R19.5									
	425/55R19.5									
	9R22.5									
	10R22.5									
	11R22.5	○						○	○	
	12R22.5						○	○		
	13R22.5				○					○
	275/80R22.5									
	295/80R22.5									
	315/80R22.5				○			○		
	245/75R22.5									
	295/75R22.5									
	255/70R22.5									
	275/70R22.5									
	315/70R22.5									
	385/65R22.5		○							
	425/65R22.5		○							
	445/65R22.5		○							
	295/60R22.5									
	315/60R22.5									
	265/60R22.5									
	385/55R22.5									
	11R24.5									
	12R24.5									
	285/75R24.5									
	7.50R15									
	8.25R15									
	10.00R15									
	7.50R16	○								
	8.25R16									
	7.50R18									
	8.25R20									
Tube Type	9.00R20			○						
	10.00R20					○				
	11.00R20									
	12.00R20									
	365/80R20									
	11.00R22									
	11.00R24									
	12.00R24									
	325/95R24 (TL)									

TRUCK and BUS TIRES APPLICATION For Oceania *not for all countries by tire standard and specifications.

CATEGORY		ON ROAD									
PATTERN		RI-117	RI-128	RI150	RI151	RI-158	BI850	BI-851	BI-867	GI-327	GI-377
Application for Truck	Steer	⊙	○	⊙	⊙	⊙				○	
	All position	○	○	○	○	○				⊙	⊙
	Drive						⊙	⊙	⊙		
	Trailer	○	○	○	○						
Application for Bus type	InCity										
	Intercity										
Distance	Long	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙		
	Middle	○	○		○	○		○	○	⊙	⊙
	Short	○	○			○					○
Tubeless	8.5R17.5										
	9.5R17.5	○			○						
	10R17.5										
	225/90R17.5					○				○	
	225/80R17.5					○					○
	205/75R17.5				○			○			
	215/75R17.5		○		○			○			
	225/75R17.5										
	235/75R17.5		○		○			○			
	245/70R17.5										
	8R19.5										
	225/70R19.5				○						
	245/70R19.5		○								
	265/70R19.5		○		○						
	285/70R19.5										
	425/55R19.5										
	9R22.5										
	10R22.5		○								
	11R22.5		○	○			○		○		○
	12R22.5										
	13R22.5										
	275/80R22.5										
	295/80R22.5	○	○		○						
	315/80R22.5		○		○						
	245/75R22.5										
	295/75R22.5										
	255/70R22.5	○	○	○							
	275/70R22.5		○	○							
	315/70R22.5										
	385/65R22.5	○	○		○						
	425/65R22.5										
	445/65R22.5										
	295/60R22.5										
	315/60R22.5										
	265/60R22.5										
	385/55R22.5										
	11R24.5										
	12R24.5										
	285/75R24.5										
	7.50R15										
	8.25R15										
	10.00R15										
	7.50R16										○
	8.25R16										
	7.50R18										
	8.25R20										
Tube Type	9.00R20		○								
	10.00R20										
	11.00R20										
	12.00R20										
	365/80R20										
	11.00R22										
	11.00R24										
	12.00R24										
	325/95R24 (TL)										

CATEGORY		ON ROAD		ON-OFF ROAD	
PATTERN		R1200	MI-577	GI-388	R3200
Application for Truck	Steer	○			
	All position	⊙	⊙	⊙	⊙
	Drive				
	Trailer				
Application for Bus type	InCity				
	Intercity				
Distance	Long				
	Middle	⊙	○	○	
	Short		⊙	⊙	⊙
Tubeless	8.5R17.5				
	9.5R17.5				
	10R17.5				
	225/90R17.5		○		
	225/80R17.5				
	205/75R17.5				
	215/75R17.5				
	225/75R17.5				
	235/75R17.5				
	245/70R17.5				
	8R19.5				
	225/70R19.5				
	245/70R19.5				
	265/70R19.5			○	
	285/70R19.5				
	425/55R19.5				
	9R22.5				
	10R22.5				
	11R22.5	○		○	○
	12R22.5				
	13R22.5				
	275/80R22.5				
	295/80R22.5				
	315/80R22.5			○	
	245/75R22.5				
	295/75R22.5				
	255/70R22.5				
	275/70R22.5				
	315/70R22.5				
	385/65R22.5				
	425/65R22.5				
	445/65R22.5				
	295/60R22.5				
	315/60R22.5				
	265/60R22.5				
	385/55R22.5				
	11R24.5				
	12R24.5				
	285/75R24.5				
	7.50R15				
	8.25R15				
	10.00R15				
	7.50R16				
	8.25R16				
	7.50R18				
	8.25R20				
Tube Type	9.00R20				
	10.00R20	○			
	11.00R20				
	12.00R20				
	365/80R20				
	11.00R22				
	11.00R24				
	12.00R24				
	325/95R24 (TL)				



RI-117

HIGHWAY SERVICE

- Rib pattern designed for steering performance and trailer axle highway use.
- Enhanced resistance to irregular wear.



RI-117

Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
8.5R 17.5		121/120L	TL	○	OHTSU	802	209	6.00	5.25, 6.00	11.5
9.5R 17.5	18PR	143/141G	TL	○	OHTSU	844	239	6.75	6.00, 6.75	12.0
9.5R 17.5	18PR	143/141K	TL	○	OHTSU	844	239	6.75	6.00, 6.75	12.0
12R 22.5	16PR	152/148M	TL	○	FALKEN	1083	292	9.00	8.25, 9.00	15.1
385 /65R 22.5	18PR	160K [158L]	TL	○	FALKEN	1073	375	11.75	11.75, 12.25	14.5
255 /70R 22.5		140/137M	TL	○	OHTSU	927	253	7.50	6.75, 7.50, 8.25	12.5
365 /80R 20		160K	TL	○	OHTSU	1098	357	10.00	10.00	15.0
295 /80R 22.5	16PR	152/148M	TL	○	FALKEN	1050	303	9.00	8.25, 9.00	14.5
315 /80R 22.5		154/150M [156/150L]	TL	○	FALKEN	1075	315	9.00	9.00, 9.75	15.4



RI150

HIGHWAY SERVICE

- Designed to maximize mileage for mainly steering performance.
- A way outside shoulder groove helps to prevent cracking.



Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
★ 10R 22.5		144/142L								
11R 22.5		152/149M	TL	○	FALKEN	1080	307	8.25	7.50 - 8.25	15.1
12R 22.5		152/149M	TL	○	FALKEN	1080	307	9.00	9.00 - 9.75	15.1
255 / 70R 22.5		140/137M								
275 / 70R 22.5	18PR	148/145M	TL	○	FALKEN	968	282	8.25	7.50 - 8.25	16.7
10.00R 20		147/143L		○	FALKEN	1053	278	8.25	6.75 - 8.25	15.5
12.00R 24		160/156L		○		1216	315	8.50	8.00 - 9.00	14.9

★ : Under Development

RI-128

HIGHWAY SERVICE

- Rib pattern designed for sure steering and trailer axle highway use.
- Excellent wear resistance, durability, and handling at high speed.
- Excellent stability on wet surfaces.



RI-128

Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
9.00R 20	14PR	140/137K		○	FALKEN	1014	261	7.00	6.50 - 7.00	13.0
10.00R 20	16PR	147/143K		○	FALKEN	1047	279	7.50	7.00, 7.50, 8.00	13.5
12.00R 24	18PR	156/153K		○	FALKEN	1213	317	8.50	7.50, 8.00, 8.50, 9.00	14.4
10R 22.5	14PR	144/142L	TL	○	FALKEN	1018	255	7.50	6.75, 7.50	13.0
11R 22.5		148/145M	TL	○	FALKEN	1049	279	8.25	7.50, 8.25	16.2
11R 24.5		149/146L	TL	○	FALKEN	1107	286	8.25	7.50, 8.25	16.2
385 /55R 22.5	-	160K	TL		FALKEN	1006	382	12.25	11.75, 12.25	15.1
315 /60R 22.5	-	152/148L	TL	○	FALKEN	956	313	9.75	9.00, 9.75	12.7
385 /65R 22.5		160K[158L]	TL	○	FALKEN	1073	377	11.75	11.75, 12.25	16.5
225 /70R 19.5	14PR	128/126M	TL		FALKEN	811		6.75	6.00, 6.75	12.5
245 /70R 19.5		140/138J	TL	○	FALKEN	842	247	7.50	6.75, 7.50	12.4
245 /70R 19.5		136/134M	TL	○	FALKEN	842	247	7.50	6.75, 7.50	12.4
265 /70R 19.5		143/141J	TL	○	FALKEN	869	252	7.50	6.75, 7.50, 8.25	13.3
265 /70R 19.5		140/138M	TL	○	FALKEN	869	252	7.50	6.75, 7.50, 8.25	13.3
285 /70R 19.5	16PR	146/144M	TL	○	FALKEN	893	288	8.25	7.50, 9.00	13.6
255 /70R 22.5	16PR	140/137M	TL	○	FALKEN	926	255	7.5	6.75, 7.50, 8.25	12.5
275 /70R 22.5		148/145M	TL	○	FALKEN	959	274	8.25	7.50, 8.25	13.5
315 /70R 22.5		152/148M[154/150L]	TL	○	FALKEN	1018	314	9.00	9.00, 9.75	14.8
215 /75R 17.5		126/124M	TL	○	FALKEN	774	211	6.00	6.00 , 6.75	12.5
215 /75R 17.5	16PR	135/133J	TL	○	FALKEN	773	213	6.00	6.00, 6.75	12.5
235 /75R 17.5		143/141J	TL	○	FALKEN	801	237	6.75	6.75, 7.50	13.0
295 /75R 22.5	16PR	146/143L	TL		FALKEN	1022		9.00	8.25, 9.00	16.2
285 /75R 24.5	16PR	147/144L	TL		FALKEN	1056		8.25	8.25,	16.2
275 /80R 22.5	16PR	149/146L	TL	○	FALKEN	1022	278	8.25	7.50, 8.25	16.2
295 /80R 22.5		152/148M	TL	○	FALKEN	1050	304	9.00	8.25, 9.00	15.3
315 /80R 22.5	18PR	154/150M	TL	○	FALKEN	1074	314	9.00	9.00, 9.75	15.4

RI151

HIGHWAY SERVICE

- Extra wear-resistant with high mileage potential.
- Excellent directional stability in straights and cornering.



Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
385/55 R22.5		160K[158L]	TL	○	FALKEN	996	401	12.25	11.75 - 12.25	15.1
315/60 R22.5		152/148L	TL	○	FALKEN	957	314	9.75	9.00 - 9.75	12.7
385/65 R22.5		160K[158L]	TL	○	FALKEN	1072	405	11.75	11.75 - 12.25	14.4
245/70 R17.5		136/134M	TL	○	FALKEN	794	241	7.50	6.75 - 7.50	12.4
225/70 R19.5		128/126L	TL		FALKEN	809	225	6.75	6.00 - 6.75	12.5
245/70 R19.5		136/134M	TL	○	FALKEN	839	258	7.50	6.75 - 7.50	12.8
265/70 R19.5		140/138M	TL	○	FALKEN	868	256	7.50	6.75 - 8.25	12.8
285/70 R19.5		146/144M	TL	○	FALKEN	895	294	8.25	7.50 - 9.00	13.4
315/70 R22.5		154/150L	TL	○	FALKEN	1014	318	9.00	9.00 - 9.75	13.9
205/75 R17.5		124/122M	TL	○	FALKEN	759	204	6.00	5.25 - 6.75	11.5
215/75 R17.5		126/124M	TL	○	FALKEN	771	212	6.00	6.00 - 6.75	12.0
235/75 R17.5		132/130M	TL	○	FALKEN	797	242	6.75	6.75 - 7.50	13.1
295/80 R22.5		154/149M	TL	○	FALKEN	1052	307	9.00	8.25 - 9.00	15.6
315/80 R22.5		156/150L[154/150M]	TL	○	FALKEN	1078	315	9.00	9.00 - 9.75	17.0
8.5 R17.5	18PR	121/120L	TL	○	FALKEN	803	209	6.00	5.25 - 6.75	11.5
9.5 R17.5		143/141[k]	TL	○	FALKEN	846	238	6.75	6.00 - 6.75	12.0



RI-158

HIGHWAY SERVICE

- Rib pattern designed for mainly steering performance highway use.
- Excellent wear resistance, durability and handling at high speed.
- Excellent stability on wet surfaces.
- Not recommended for gravel road.

RI-158

Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
225/80R 17.5		123/122L	TL	○	FALKEN	803	224	6.75	6.00, 6.75	12.3
225/90R 17.5		127/125L	TL		FALKEN	855	234	6.75	6.00, 6.75	12.7



BI850

HIGHWAY SERVICE

- Wide and deep tread designed for long life.
- Drive axle tire designed for on road.
- Better stone ejecting and chipping resistance.



Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
11R 22.5	16PR	148/145L	TL		FALKEN	1070	282	8.25	7.50 - 8.25	22.2
11R 24.5		149/146L								
★ 295/80R 22.5										

★: Under Development

BI-807D

HIGHWAY SERVICE

- Suitable for long distance use.
- Excellent stability in wet conditions.
- Deep tread design for long life.
- Extra high traction tread design.

BI-807D

Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
10.00R 20	14PR			○	OHTSU	1063	270	7.50	7.00, 7.50, 8.00	20.6
11R 22.5		148/145L	TL	○	OHTSU	1064	273	8.25	7.50, 8.25	20.6
12R 22.5	16PR	152/148L	TL	○	OHTSU	1093	297	9.00	8.25, 9.00	21.3
295/75R 22.5	16PR		TL		OHTSU	1034	288	9.00	8.25, 9.00	20.6
285/75R 24.5	16PR	147/144L	TL	○	OHTSU	1066	278	8.25	8.25	20.6
315/80R 22.5		154/150M(156/150L)	TL	○	OHTSU	1088	308	9.00	9.00, 9.75	20.4

BI851

HIGHWAY SERVICE

- Drive axle tire designed for on road.
- Outstanding traction performance.
- Excellent mileage and enhanced rolling resistance.



Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
★ 205 /75R 17.5		124/122M							-	
★ 215 /75R 17.5		126/124M							-	
★ 225 /75R 17.5		129/122M							-	
★ 235 /75R 17.5		132/130M							-	

★: Under Development



BI-867

HIGHWAY SERVICE

- Extra-high traction tread design.
- Excellent stability in wet and dry conditions.
- Deep tread designed for extra-long service life.



Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
11R 22.5		148/145L	TL	○	FALKEN	1064	285	8.25	7.50, 8.25	20.6
12R 22.5		152/148L	TL	○	FALKEN	1084	304	9.00	8.25, 9.00	19.7
315/70R 22.5		152/148M(154/150L)	TL	○	FALKEN	1027	314	9.00	9.00, 9.75	20.4
* 215/75R 17.5		126/124M	TL	○	FALKEN	775	214	6.00	6.00, 6.75	14.7
295/80R 22.5		152/148M	TL	○	FALKEN	1059	301	9.00	8.25, 9.00	19.5
315/80R 22.5		154/150M(156/150L)	TL	○	FALKEN	1083	313	9.00	9.00, 9.75	20.4

*:5rib

RI-177

HIGHWAY SERVICE

- Rib pattern for highway driving, designed mainly for all position use.
- Enhanced resistance to irregular wear.



Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
12.00R 20	18PR	154/151K		○	OHTSU	1113	304	8.50	8.00, 8.50, 9.00	15.2

RI-188

HIGHWAY SERVICE

- Rib pattern designed for steering performance and trailer axle highway use.
- Excellent wear resistance, durability and handling at high speed.
- Excellent stability on wet surfaces.



RI-188

Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
12R 22.5	16PR	152/148M	TL	○	FALKEN	1074	299	9.00	8.25, 9.00	14.8



GI-307

ON-AND-OFF ROAD SERVICE

- All-round tire designed for on and limited off road use.
- Tough materials with cut resistance.
- Excellent durability in tough road conditions.
- Uses Tread compound for less heat build up.



GI-307

Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
*12.00R 24	18PR	156/153K		○	FALKEN	1215	317	8.50	7.50, 8.00, 8.50, 9.00	15.8
13R 22.5		154/150K (156/150G)	TL	○	FALKEN	1124	311	9.75	9.00, 9.75	17.8
315/80R 22.5		156/150K	TL	○	FALKEN	1074	309	9.00	9.00, 9.75	17.8

*: GI307EX

GI-327

HIGHWAY SERVICE

- Tough materials provide cut resistance.
- Excellent durability in tough road conditions.
- Uses Tread compound for less heat build up.



GI-327

Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
8.25R 16	14PR				OHTSU	857	233	6.50	6.00 - 6.50	15.5
11R 22.5	16PR	148/145L	TL	○	OHTSU	1053	270	8.25	7.50, 8.25	16.2
225/90R 17.5		127/125L	TL		OHTSU	863	228	6.75	6.00, 6.75	15.5

GI-377

HIGHWAY SERVICE

- Rib/lug pattern for on road service. Designed for all position use.
- Excellent traction performance.
- Enhanced long mileage and resistance to irregular wear.



GI-377

Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
7.50R 16		122/120L			FALKEN	808	217	6.00	6.00	14.9
7.50R 16	14PR				FALKEN	809	213	6.00	6.00	15.1
11R 22.5	16PR	148/145L	TL	○	FALKEN	1056	284	8.25	7.50, 8.25	17.1
225/80R 17.5		123/122L	TL	○	FALKEN	809	220	6.75	6.00, 6.75	15.1



GI378

HIGHWAY SERVICE

■ All position tires designed for on road service.



Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
385 /65R 22.5	18PR	158K	TL	○	FALKEN	1076	375	11.75	11.75, 12.25	15.9
425 /65R 22.5	20PR	165K	TL	○	FALKEN	1126	418	12.25	12.25, 13.00	15.9
445 /65R 22.5	20PR	168K	TL	○	FALKEN	1152	448	13.00	13.00, 14.00	15.9



R3500

HIGHWAY SERVICE

■ Rib/lug pattern for highway driving, designed for all position use.
■ Excellent traction in wet conditions.
■ Longer mileage, and enhanced resistance to irregular wear.



Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
9.00R 20	14PR	139/137K			OHTSU	1020	258	7.00	6.50, 7.00, 7.50	16.4
10R 22.5	14PR	140/137K	TL	○	OHTSU	1021	249	7.50	6.75, 7.50	16.4

MI-527

HIGHWAY SERVICE

■ Developed for all-season performance.
■ Can be used in snowy road conditions.
■ Excellent stability & wet traction.
■ Enhanced resistance to irregular wear.



MI-527

Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
8.5R 17.5	14PR	121/120L	TL	○	OHTSU	809	209	6.00	5.25, 6.00	15.0
265 /70R 19.5		143/141J	TL	○	OHTSU	873	246	7.50	6.75, 7.50, 8.25	16.6
275 /70R 22.5	14PR	148/145L	TL	○	OHTSU	965	275	8.25	7.50, 8.25	16.8
295 /80R 22.5	16PR	152/148M	TL	○	OHTSU	1053	303	9.00	8.25, 9.00	16.8

MI-577

HIGHWAY SERVICE

■ Developed for all-season performance.
■ Can be used in snowy road conditions.
■ Excellent stability & wet traction.
■ Enhanced resistance to irregular wear.



MI-577

Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
225 /90R 17.5		127/125L	TL		FALKEN	858	234	6.75	6.00, 6.75	15.6

R1200

HIGHWAY SERVICE

■ Rib pattern for highway driving, designed for all position fitments.
■ Enhanced middle-distance performance.
■ Excellent steering response at high speed.
■ Outstanding performance and stability in wet conditions.



R1200

Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
9.00R 20	14PR	140/137K		○	OHTSU	1016	258	7.00	6.50, 7.00, 7.50	13.8
11.00R 20	16PR	150/146K		○	OHTSU	1084	285	8.00	7.50, 8.00, 8.50	14.8
11R 22.5	16PR	148/145M	TL	○	OHTSU	1055	280	8.25	7.50, 8.25	14.8
* 12R 22.5	16PR	152/148M	TL	○	OHTSU	1085	299	8.25	8.25	14.9

*: R1200D

RI-129

ON-AND-OFF ROAD SERVICE

■ All position tire with special tread compound to ensure good performance in the regional application.



Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
★ 12.00R20		154/150K								
★ 12.00R24		160/150K								
315 /80R 22.5		154/150M	TL	○	FALKEN	1078	313	9.00	9.00, 9.75	16.6
★ 325 /95R 24		162/160K	TL(TT)							

★: Under Development

TL(TT)=TUBELESS MAY BE USED WITH TUBE.



R3100

ON-AND-OFF ROAD SERVICE

- Rib/lug pattern for on and limited off road conditions.Designed for all-position use.
- Excellent traction performance.
- Enhanced resistance to cutting and chipping.



R3200

Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
12.00R 20	18PR	154/149K		○	OHTSU	1123	307	8.50	8.00, 8.50, 9.00	16.2
*11R 22.5	16PR	148/145L	TL	○	OHTSU	1056	272	8.25	7.50, 8.25	15.8

*:R3200

GI-337

ON-AND-OFF ROAD SERVICE

- Rib/lug pattern for highway driving, designed for all-position use.
- Excellent traction performance.
- Longer mileage, and enhanced resistance to irregular wear.



GI-337

Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
10.00R 20	16PR	147/143K		○	OHTSU	1055	279	7.50	7.00, 7.50, 8.00	16.9



GI-347

ON-AND-OFF ROAD SERVICE

- Rib/lug pattern for on-and off-road conditions, designed for all-position use.
- Excellent traction performance.
- Longer mileage, and enhanced resistance to irregular wear.
- Excellent durability in tough road conditions.
- Uses Tread compound for less heat build up.



Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
11.00R 20	16PR	150/146K		○	OHTSU	1093	291	8.00	7.50, 8.00, 8.50	17.5
12R 22.5	16PR	152/148K	TL	○	OHTSU	1093	296	9.00	8.25, 9.00	17.5

GI388

ON-AND-OFF ROAD SERVICE

- Deeper tread all position tires designed for on & off road service conditions.
- Stone ejectors in the center groove.



GI388

Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
11R 22.5		146/143K	TL		FALKEN	1065	286	8.25	7.50 - 8.25	19.1
11R 24.5	16PR	149/146K	TL		FALKEN	1119	287	8.25	7.50,8.25	20.6
★ 12.00R 20		154/150K								
12R 22.5	16PR	152/148K	TL	○	FALKEN	1092	299	9.00	8.25, 9.00	18.3
12.00R 24	20PR	160/156K	TT	○	FALKEN	1222	315	8.50	8.00 - 9.00	16.7
13R 22.5		156/150K(154L)	TL	○	FALKEN	1126	314	9.00	9.50 - 9.75	17.8
265 /70R 19.5		143/141J	TL	○	FALKEN	878	256	7.50	6.75 - 8.25	14.7
275 /70R 22.5		148/145K	TL	○	FALKEN	973	281	8.25	7.50 - 8.25	18.0
★225 /80R 17.5		123/122L								
315 /80R 22.5		156/150K	TL	○	FALKEN	1083	312	9.00	9.00, 9.75	19.1
325 /95R 24		162/160K	TL(TT)	○	FALKEN	1222	315	9.00	8.50 - 10.00	16.7

★: Under Development

TL(TT)=TUBELESS MAY BE USED WITH TUBE.



LI-257

OFF ROAD SERVICE

■ Lug pattern designed for drive use.



Size	Ply Rating	Load Index & Speed Symbol	TL	E-No.	Brand	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
								Measuring	Approved	
12R 22.5		152/148K	TL	○	FALKEN	1097	304	9.00	8.25 - 9.00	19.7
13R 22.5		154/150K(156/150G)	TL	○	FALKEN	1128	322	9.75	9.00 - 9.75	20.0
315 /80R 22.5		156/150K	TL	○	FALKEN	1088	315	9.00	9.00 - 9.75	21.3

ATTENTION

1. ⚠ SAFETY WARNING

Any tire, no matter how well constructed, may fail in use as a result of punctures, impact damage, improper inflation, overloading, excessive wear or other use conditions. A tire is wear-sensitive and all tires eventually wear out. A worn or damaged tire can present a safety hazard, and a tire failure can lead to an accident that may result in property damage, injuries or death. To reduce the risk of tire failure we advise as follows:

- Check the air pressure in all your tires (including the spare) at least monthly and before long trips & when tires are cool (when your vehicle has been driven less than one mile or after being stopped for at least one hour).
Don't reduce air pressure when tires are hot from driving. Use a good quality, accurate tire gauge to check air pressure and maintain air pressure at the level recommended by the vehicle manufacturer.
- Never overload your tires.
- The maximum load-carrying capability of your tires is molded on the sidewall of each tire.
- Check your tires regularly for scrapes, bulges, separations, cuts, snags or embedded foreign objects. See your FALKEN store or dealer immediately if any such condition is discovered.
- Never operate your vehicle in excess of lawful speeds, beyond maximum speeds determined by driving conditions or at speeds greater than recommended for the tire you are using.
- Make every effort to avoid driving over objects that may damage the tire through impact or cutting, such as potholes, glass, metal, etc.
- Never drive on bald tires. Always remove tires from service and replace them when 2/32 inch (1.6 mm) tread depth remains on the tire. Tread wear indicators are built into the tires to indicate when they are worn to 2/32 inch (1.6 mm). In most countries, it is illegal to drive with tires with less than 2/32 inch (1.6 mm) of tread remaining.
- Don't spin tires excessively on mud, snow, ice, etc. as this can cause tire explosion or disintegration, as well as axle failure.
- Always follow the instructions and recommendations of the vehicle manufacturer, as contained in the vehicle Owner's Manual.
- IMPORTANT INFORMATION is molded on the tire sidewall. The sidewall information includes the type, size, load range, rotation, maximum load and maximum pressure for that particular tire. Remember that the vehicle manufacturer, not the tire manufacturer, determines the correct inflation pressure for the tires on vehicle.

2. RECOMMENDATIONS ON TIRE STORAGE

- To avoid deterioration and discoloration, storage time must be minimized. Always follow the principle of "First In, First Out."
- Tires must be stored in clean conditions, free from exposure to sunlight or strong artificial light, heat, ozone and hydrocarbons.
- The storage area should be cool (preferably below 25°C), dry and moderately ventilated. Moist conditions should be avoided.
- Tires should be stored in a relaxed condition free from tension, compression or other deformation, since these may cause cracking or permanent distortion.

CORPORATE DATA

GUIDE TO PROVING GROUNDS

Sumitomo Rubber's tires proving grounds in Okayama, Nayoro, and Asahikawa support evolution of tires through severe tests conducted in many kinds of roads of the world and in various driving conditions.

OKAYAMA

This facility merges the Roads of the World,in one location. Sumitomo Rubber's Okayama Proving Ground reproduces the world's roads and a wide variety of driving conditions. The expansive site, with a total area of 1,000,000 square meters, is fully equipped with a 3,200meter main circuit, a handling stability test track, wet roads, a noise and vibration test track, and tire noise evaluation devices, among many others. To provide drivers around the world with greater safety and comfort, the site plays an invaluable role in the research and development of high-performance tires that boast superior handling and refined comfort, and next generation tires including run-flat tires, electric car tires and ultra-lightweight tires.



ASAHIKAWA High Quality winter tires are born here - Sumitomo Rubber Asahikawa Proving Ground

Asahikawa Proving Ground, specially designed for winter testing, is located in the city of Asahikawa in Hokkaido and boasts a total area of 210,000 square meters. The facility includes a 1,400meter main circuit and a variety of ice and packed snow surfaces, making it an important base of research and development for winter tires.



NAYORO Winter Tire Special Evaluation Center - Sumitomo Rubber Nayoro Proving Ground

Nayoro Proving Ground, specially designed for winter testing, is located in the city of Nayoro in Hokkaido, and boasts a total area of 870,000 square meters. The facility includes a 2,200meter main circuit, and variety of ice and packed snow surfaces, making this an important base of research and development for winter tires.



OVERSEAS OFFICES



Falken Tyre Europe GmbH

Berliner Strasse 74-76
63065 Offenbach am Main/Germany
TEL: +49-69-247-5252-10
FAX: +49-69-247-5252-11

Sumitomo Rubber Middle East FZE

Office No. 5WA 11B, Dubai Airport Free Zone
P. O. Box 54901, Dubai, UAE
TEL: +971-4-214-6959
FAX: +971-4-214-6960

Sumitomo Rubber Middle East Jeddah office

c/o BINZAGR COMPANY P. O. Box 54,
Jeddah 21411, KSA
TEL: +966-2-663-7327
FAX: +966-2-663-5522

Sumitomo Rubber North America, Inc.

8656 Haven Ave., Rancho Cucamonga, CA
91730 USA
TEL: +1-909-466-1116
FAX: +1-909-466-1169

Sumitomo Rubber Asia (Tyre) PTE. LTD.

1 Maritime Square #09-58 Harbourfront Centre
Singapore 099253, Singapore
TEL: +65-6278-6975
FAX: +65-6278-4049

Sumitomo Rubber Latin America Lmitada

Av. El Bosque Norte N° 0123, of. 902, Las Condes,
Santiago, Chile
TEL: +56-2-244-5190, +56-2-244-5192
FAX: +56-2-244-1815

Falken Tyre India Private Limited

Unit No. 312, 4th Floor, Centrum Plaza, Golf Course Road,
Sector 53, Gurgaon 122002, Haryana, India
TEL: +91-124-463-8989

Sumitomo Rubber Australia Pty. Ltd.

32 Riverside Road, Chipping Norton NSW
2170 Australia.
TEL: +61-2-8774-2905
FAX: +61-2-9755-4599