

Authorized Distributor:



COMFORSER

2018 Tire Catalogue

Company History



Shandong Yinbao Rubber Industry Co.,Ltd was established.



TBR tyre program was started.



Shandong Yinbao Tyre Group Co.,Ltd was established.



Shandong Yinbao Carbon Black Co.,Ltd was established.




Shandong New Continent Tire Co.,Ltd (SNC) was established for PCR tire manufacture.



Anhui Delun Tire Co.,Ltd was established for TBR tire manufacture.



SNC Qingdao office was founded.

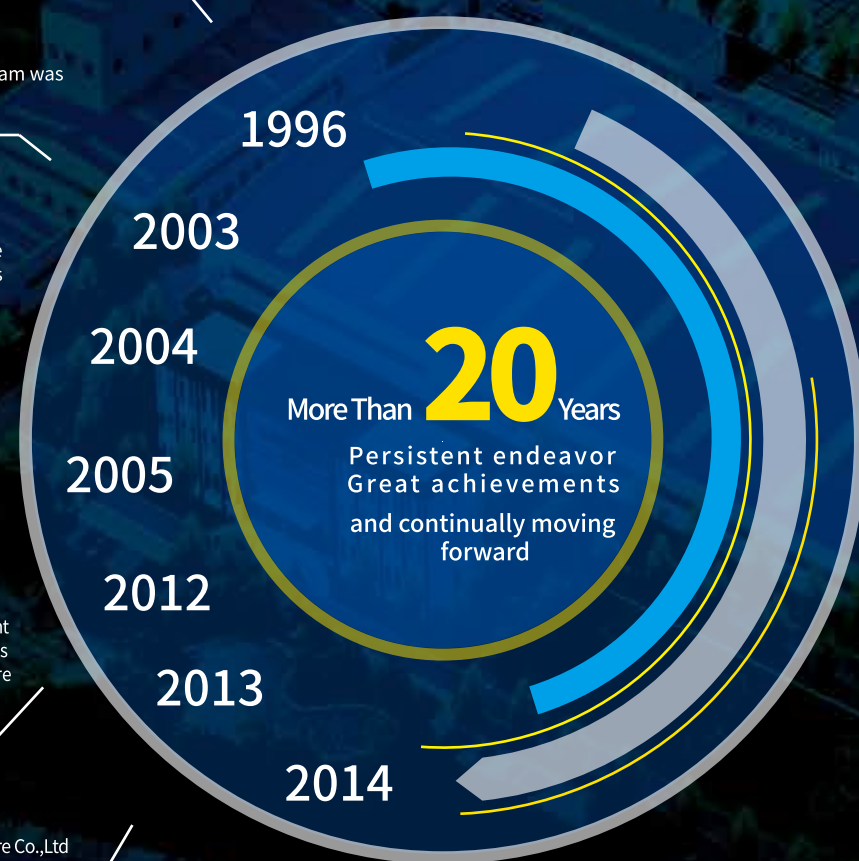

Founded in October 2012, Shandong New Continent Tire Co., Ltd. (SNC) is a subsidiary of Shandong Yinbao Tyre Group, which is a large modernized manufacture of passenger car radial tires and carbon black.

SNC is located at the famous tourism city Yishui, which owns AAAA national tourist attractions. As one of the most famous PCR manufacturers in China, the company owns two brands: COMFORSER and ROADCRUZA. The company has first-class advanced equipment imported from Europe and US, such as: cutting machine, steel wire tire cord fiber fabric cutting machine, rolling machine, extruders etc.

The core equipment of production line adopts the AB system which is stable and reliable. The two brands have successively passed all kinds of system certification including the ISO9001 quality management, US DOT, Europe ECE, Brazil INME TRO, Indonesia SNI, China CCC, ISO10012 metering management system certification.

Shandong New Continent Tire Co., Ltd has been committed to building "No.1 Brand of Chinese SUV Tires" and provide the most professional SUV and UHP tires for automobile accessories and modification.

As for after-sales service, the company has gradually built up a perfect global service network. The company has always adhered to the service concept of "customer-centric", and has successfully achieved the service target of "think as the customers think, and meet whatever the customers need".

In the future, SNC will continue to contribute to green environmental protection, following a sustainable development road. The company will devote themselves wholeheartedly to the production of high quality tires, so as to truly realize quiet, comfortable and outstanding driving performance for users all around world.


Company Profile

Established in 2012, Shandong New Continent Tire Co., Ltd. (SNC) has continuously developed the market during its growing process. Based on domestic market, SNC has gradually and successfully enter into the market of West Europe, East Europe, South America, North America, Middle East, South Africa, South Asia, and Australia etc, and its brand radiation range has been expanding.

Supported by government policy, lead by wise leaders, the market planning of the company has become more and more detailed and innovative. With keen insights on tire industrial development, sufficient human resource and financial support, SNC market modification is constantly improving.

At present, SNC has set up a few of after service center around the world, a professional and improved globe service system, and it also has formed a tire service base.

By means of domestic integration and overseas service resources, a complete service network and social agent service system will be formed rapidly and efficiently to provide high quality one stop service for overseas customers.

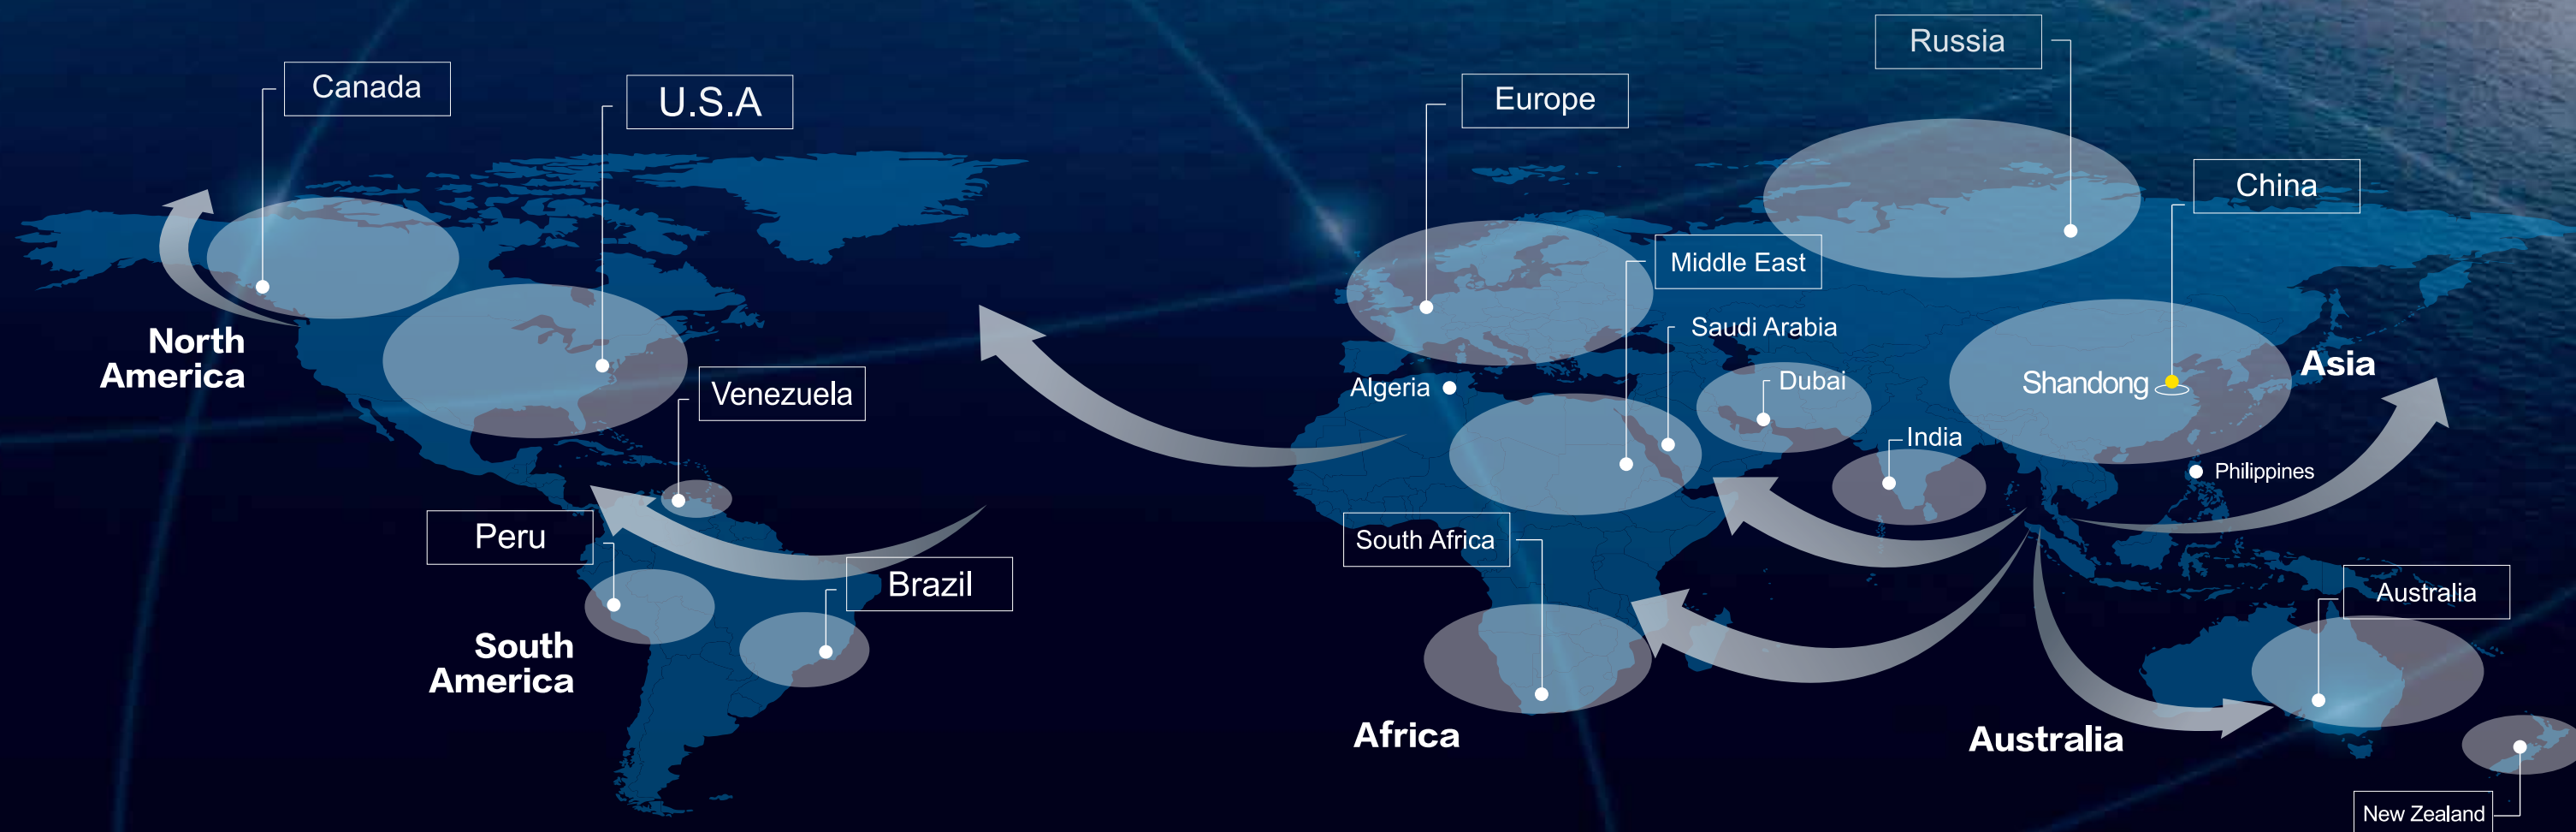

PCR TIRE SERIES
Product Mapping



CF3000 THRUSTER CF1000 CF4000 CF2000 CF710 CF720 CF600 CF930 CF960



CF700 CF500 CF510 CF610 CF300 SPORTS K4 CF950 CF970 CF900 CF350 CF360

RUN-FLAT
Technology



RF500

LETTER PATENT



COLORED TIRE SERIES
Product Mapping





CF3000		THRUSTER	CF1000	CF4000	CF2000	
M/T		Off-Road	A/T	SUV/CUV	H/T	
 		 	 	 	 	
255/55R19	33x12.50R24LT	31X10.50-16LT	P215/75R15	225/60R18	215/75R15	205/60R16
215/85R16LT	35x12.50R15LT	33X10.50-16LT	P235/75R15	245/60R18	225/75R15	215/60R17
235/85R16LT	35x12.50R17LT	35X10.50-16LT	P215/70R16	275/40R20	235/75R15	225/60R17
215/75R15LT	35x12.50R18LT		225/70R15	225/55ZR18	265/75R16	235/60R18
235/75R15LT	35x12.50R20LT		P235/70R16	255/55ZR18	205/70R14	265/60R18
225/75R16LT	35x12.50R22LT		P245/70R16	255/55ZR19	205/70R15	275/60R20
245/75R16LT	35x12.50R24LT		255/70R16	275/55ZR20	215/70R16	235/55R17
265/75R16LT	35x13.50R20LT		P265/70R16	245/50ZR18	225/70R16	215/55R18
285/75R16LT	37x12.50R17LT		P265/65R17	265/50ZR20	235/70R16	235/55R18
315/75R16LT	37x13.50R20LT		225/60R17	285/50ZR20	245/70R16	235/50R18
205/70R15LT	37x13.50R22LT		235/60R16	275/45ZR20	255/70R16	235/60R17
235/70R16LT	37x13.50R24LT		255/60R18	295/35ZR21	265/70R16	245/70R17LT
245/70R16LT	37x13.50R26LT		285/60R18		275/70R16	265/70R17LT
305/70R16LT	38x15.50R20LT		235/55R16	245/50RF18 RFT	205/65R16	215/75R15LT
265/70R17LT	40x15.50R24LT		265/50R20	255/55RF18 RFT	215/65R16	
285/70R17LT	40x15.50R26LT		235/85R16LT		225/65R17	
265/65R17LT	42x15.50R28LT		245/75R16LT		235/65R17	
275/65R18LT			265/75R16LT		245/65R17	
285/65R18LT			285/75R16LT		255/65R17	
31x10.50R15LT			265/70R16LT		265/65R17	
32x11.50R15LT			265/70R17LT		275/65R17	
33x12.50R15LT			285/70R17LT		285/65R17	
33x12.50R17LT			30×9.50R15LT		275/65R18	
33x12.50R18LT			31×10.50R15LT			
33x12.50R20LT			35×12.50R17LT			
33x12.50R22LT			35×12.50R18LT			
			35×12.50R20LT			
43 Sizes	3 Sizes	27 Sizes	14 Sizes	37 Sizes		
Page:11-12	Page:13-14	Page:15-16	Page:17-18	Page:19-20		



CF710		CF720	CF600	CF930	CF960	
UHP/RFT		UHP	HP	Winter HP	Winter SUV/UHP	
 		 	 	 	  	
205/55R16	255/45ZR18	305/45ZR22	155/70R13	165/70R13	215/75R15	245/50R20
215/55R16	205/40ZR18	305/40ZR22	155/80R13	165/70R14	235/70R16	285/50R20
225/55R16	215/40ZR18	265/35ZR22	165/70R13	175/70R14	245/75R17	245/45R20
185/50R16	225/40ZR18	245/30ZR22	175/70R13	185/70R14	285/70R17	275/45R20
195/50R16	235/40ZR18	295/35ZR24	165/70R14	175/65R14	235/55R17	245/40R20
205/50R16	245/40ZR18	305/35ZR24	175/70R14	185/65R14	215/50R17	275/40R20
195/45R16	255/40ZR18	255/30ZR24	185/70R14	175/65R15	235/45R17	275/35R20
205/45R16	245/45ZR19	295/30ZR26	195/70R14	185/65R15	235/65R18	315/35R20
215/55R17	225/40ZR19	305/30ZR26	215/70R15	195/65R15	265/60R18	275/50R21
225/55R17	235/40ZR19	275/25ZR26	175/65R14	205/65R15	285/60R18	275/45R21
235/55R17	245/40ZR19	295/25ZR28	185/65R14	185/60R14	215/55R18	275/40R22
205/50R17	275/40ZR19	325/30ZR28	175/65R15	185/60R15	235/55R18	
215/50R17	245/35ZR19	305/25ZR28	185/65R15	195/60R15	235/50R18	
225/50R17	295/30ZR19	245/40ZR22	195/65R15	205/60R16	245/50R18	
235/50R17	245/35ZR20	245/35ZR22	205/65R15	215/60R16	275/45R18	
205/45R17	255/35ZR20	295/30ZR22	215/65R15	195/55R15	255/45R18	
215/45ZR17		295/25ZR22	185/60R14	195/55R16	225/45R18	
225/45ZR17	205/55RF16 RFT	275/25ZR24	185/60R15	205/55R16	255/40R18	
235/45ZR17	225/55RF17 RFT		195/60R15	215/55R16	275/55R19	
245/45ZR17	225/50RF17 RFT		205/60R15	225/55R16	245/55R19	
255/45ZR17	245/45RF18 RFT		215/60R15	215/55R17	235/50R19	
205/40ZR17	225/40RF18 RFT		225/60R15	225/55R17	255/45R19	
215/45ZR18	245/40RF18 RFT		195/60R16	195/50R15	225/45R19	
225/45ZR18			205/60R16	205/50R17	245/45R19	
235/45ZR18			215/60R16	225/50R17	275/40R19	
245/45ZR18			225/60R16			
			235/60R16			
48 Sizes	18 Sizes	27 Sizes	25 Sizes	36 Sizes		
Page:21-22	Page:23-24	Page:27-28	Page:29-30	Page:31-32		

Note: WSW: White Sidewall . OWL: Outlined White Letter.



CF700	CF500	CF510	CF610	CF300	CF350
UHP	HP	HP	HP	Commercial/VAN	Commercial/VAN
					
205/45ZR17	185/55R15	185/70R13 205/55R15	165/70R13	185R14C 8PR	155R13C
215/45ZR17	195/55R15	185/70R14 195/50R15	175/70R13	WSW 185R14C 8PR	165R13C
225/45ZR17	205/55R15	195/70R14 205/50R15	165/65R13	195R14C 8PR	165R14C
235/45ZR17	195/55R16	205/70R14 195/60R16	165/70R14	WSW 195R14C 8PR	175R13C
245/45ZR18	205/55R16	215/70R14 205/60R16	175/70R14	205R14C 8PR	175/75R16C
245/45ZR19	215/55R16	185/65R14 215/60R16	175/65R14	195R15C 8PR	215/75R16C
195/40ZR17	225/55R16	195/65R14 225/60R16	165/55R14	WSW 195R15C 8PR	165/70R13C
205/40ZR17	205/55R17	185/60R14 235/60R16	175/65R15	WSW 205/75R14C 8PR	165/70R14C
215/40ZR17	215/55R17	195/60R14 205/55R16	165/60R15	WSW 205/75R15C 8PR	175/70R14C
245/40ZR17	225/55R17	205/70R15	165/55R15	185/75R16C 8PR	185/70R14C
225/40ZR18	235/55R17	215/70R15		195/75R16C 8PR	175/65R14C
235/40ZR18	195/50R15	185/65R15		WSW 205/75R16C 8PR	205/65R15C
255/40ZR19	205/50R15	195/65R15		225/75R16C 10PR	215/60R16C
275/40ZR19	185/50R16	205/65R15		195/70R15C 8PR	215/60R17C
245/40ZR20	195/50R16	215/65R15		WSW 205/70R15C 8PR	235/60R17C
215/35ZR18	205/50R16	185/60R15		215/70R15C 8PR	185R14C
235/35ZR19	225/50R16	195/60R15		225/70R15C 8PR	195R14C
225/35ZR20	205/50R17	205/60R15		195/65R16C 8PR	195R15C
245/35ZR20	215/50R17	215/60R15		205/65R16C 8PR	
275/35ZR20	225/50R17	225/60R15		215/65R16C 8PR	
225/30ZR20	195/45R15	185/55R15		225/65R16C 8PR	
		195/55R15		235/65R16C 8PR	
	205/55RF16 RFT				
	225/55RF17 RFT				
	225/50RF17 RFT				
21 Sizes	24 Sizes	31 Sizes	10 Sizes	22 Sizes	18 Sizes
Page:33	Page:34	Page:35	Page:36	Page:37	Page:38

[illegible]

Note: WSW: White Sidewall . OWL: Outlined White Letter.

CF3000 M/T



Applicable models



Unique shoulder blocks

protection strip and 3D side-wall, enhancing traction in muddy conditions and snowy conditions.



Uni-directional depth pattern groove, Increasing traction



specifications

coverage from 15 to 26 inch; maximum specification, maximum size



Shoulder design for stone prevention under severe road conditions



Solidify tire body for protection

Drainage and mud shedding



Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max. Press (kPa)	Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max. Press (kPa)
				OD	SW	NSD	Single	Dual						OD	SW	NSD	Single	Dual	
255/55R19	111R XL	—	8.0	763	265	15.0	1090	—	340	33x12.50R17LT	114Q	8PR	10.0	832	318	15.0	1180	—	350
215/85R16LT	115/112Q	10PR	6.0	778	216	14.0	1215	1120	550	33x12.50R18LT	118Q	10PR	10.0	832	318	15.0	1320	—	450
235/85R16LT	120/116Q	10PR	6.5	812	235	15.0	1380	1260	550	33x12.50R20LT	114Q	10PR	10.0	832	318	15.0	1180	—	450
215/75R15LT	100/97Q	6PR	6.0	709	216	14.0	800	730	350	33x12.50R22LT	109Q	10PR	10.0	832	318	15.0	1030	—	450
235/75R15LT	104/101Q	6PR	6.5	739	235	14.0	900	825	350	33x12.50R24LT	104Q	10PR	10.0	832	318	15.0	900	—	450
225/75R16LT	115/112Q	10PR	6.0	750	223	14.0	1215	1120	550	35x12.50R15LT	113Q	6PR	10.0	883	318	16.0	1150	—	250
245/75R16LT	120/116Q	10PR	7.0	780	248	15.0	1380	1260	550	35x12.50R17LT	121Q	10PR	10.0	883	318	16.0	1450	—	450
265/75R16LT	123/120Q	10PR	7.5	810	267	15.0	1550	1400	550	35x12.50R18LT	123Q	10PR	10.0	883	318	16.0	1550	—	450
285/75R16LT	126/123Q	10PR	8.0	840	286	15.0	1700	1550	550	35x12.50R20LT	121Q	10PR	11.0	883	318	16.0	1450	—	450
315/75R16LT	127/124Q	10PR	8.5	884	313	15.0	1750	1600	450	35x12.50R22LT	117Q	10PR	10.0	883	318	16.0	1285	—	450
205/70R15LT	96/93Q	6PR	6.0	675	209	14	710	650	350	35x12.50R24LT	113Q	10PR	10.0	883	318	16.0	1150	—	450
235/70R16LT	110/107Q	8PR	7.0	742	240	14.0	1060	975	450	35x13.50R20LT	124Q	10PR	11.0	883	345	16.0	1600	—	450
245/70R16LT	118/115Q	10PR	7.0	756	248	14.0	1320	1215	550	37x12.50R17LT	124Q	8PR	10.0	934	318	16.0	1600	—	350
305/70R16LT	118/115Q	8PR	9.0	840	311	15.0	1320	1215	350	37x13.50R20LT	127Q	10PR	11.0	934	345	16.0	1750	—	450
265/70R17LT	121/118Q	10PR	8.0	810	272	15.0	1450	1320	550	37x13.50R22LT	123Q	10PR	11.0	934	345	16.0	1550	—	450
285/70R17LT	121/118Q	8PR	8.5	838	292	15.0	1450	1320	450	37x13.50R24LT	120Q	10PR	11.0	934	345	16.0	1400	—	450
265/65R17LT	120/117Q	10PR	8.0	782	272	14.0	1400	1285	550	37x13.50R26LT	117Q	10PR	11.0	934	345	16.0	1285	—	450
275/65R18LT	123/120Q	10PR	8.0	821	279	15.0	1550	1400	550	38x15.50R20LT	125Q	8PR	12.0	959	390	14.0	1650	—	350
285/65R18LT	125/122Q	10PR	8.5	833	292	15.0	1650	1500	550	40x15.50R24LT	128P	10PR	12.0	1010	390	16.0	1800	—	450
31x10.50R15LT	109Q	6PR	8.5	781	268	15.0	1030	—	350	40x15.50R26LT	127P	10PR	12.0	1010	390	16.0	1750	—	450
32x11.50R15LT	113Q	6PR	9.0	807	290	15.0	1150	—	350	42x15.50R28LT	128P	10PR	12.0	1061	390	14.0	1800	—	450
33x12.50R15LT	108Q	6PR	10.0	832	318	15.0	1000	—	250										

THRUSTER Off-Road Competition



Applicable models



Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max.Press (kPa)	UTQG
				OD	SW	NSD	Single	Dual		
31X10.50-16LT	—	—	—	—	—	—	—	—	—	—
33X10.50-16LT	—	—	—	—	—	—	—	—	—	—
35X10.50-16LT	—	—	—	—	—	—	—	—	—	—



Widen flat pattern block with depth groove
having stronger pressure resistance and better drainage and mud shedding ability



COC China Off-road Championship



Anti pressure, cutting resistance, durability



Jig-saw tread pattern
helps to improve tire's gripping and driving performance

CF1000 A/T

DESIGNED
FOR
ALL TERRAIN
HOT

Applicable
models



Sidewall	Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max.Press (kPa)	UTQG
					OD	SW	NSD	Single	Dual		
OWL	P215/75R15	100S	—	6.0	703	216	10.5	790	—	300	420AB
OWL	P235/75R15	105S	—	6.5	733	235	10.8	920	—	300	420AB
OWL	P215/70R16	99T	—	6.5	708	221	10.5	775	—	300	420AB
OWL	225/70R15	100T	—	6.5	697	228	10.8	800	—	300	420A/B
OWL	P235/70R16	104T	—	7.0	736	240	10.8	900	—	300	420AB
OWL	P245/70R16	106T	—	7.0	750	248	10.8	950	—	300	420AB
OWL	255/70R16	111T	—	7.5	764	260	10.8	1090	—	300	420AA
OWL	P265/70R16	111T	—	8.0	778	272	10.8	1090	—	300	420AB
OWL	P265/65R17	110T	—	8.0	776	272	10.8	1060	—	300	420AB
OWL	225/60R17	99H	—	6.5	702	228	10.8	775	—	300	420A/B
OWL	235/60R16	100H	—	7	688	240	10.8	800	—	300	420A/B
OWL	255/60R18	112H XL	—	7.5	763	260	10.8	1120	—	340	420AA
OWL	285/60R18	116T	—	8.5	799	292	10.8	1250	—	300	420A/B
OWL	235/55R16	98H	—	7.5	674	255	10.8	750	—	300	420A/B
OWL	265/50R20	107T	—	8.5	774	277	9.8	975	—	300	420A/B
OWL	235/85R16LT	120/116S	10PR	6.5	806	235	13.0	1380	1260	550	—
OWL	245/75R16LT	120/116S	10PR	7.0	774	248	13.0	1380	1260	550	—
OWL	265/75R16LT	123/120S	10PR	7.5	804	267	13.0	1550	1400	550	—
OWL	285/75R16LT	126/123S	10PR	8.0	834	286	13.0	1700	1550	550	—
OWL	265/70R16LT	121/118S	10PR	8.0	778	272	13.0	1450	1320	550	—
OWL	265/70R17LT	121/118S	10PR	8.0	804	272	13.0	1450	1320	550	—
OWL	285/70R17LT	121/118S	10PR	8.5	832	292	13.0	1450	1320	550	—
OWL	30 × 9.50R15LT	104R	6PR	7.5	750	240	13.0	900	—	350	—
OWL	31 × 10.50R15LT	109S	6PR	8.5	775	268	13.0	1030	—	350	—
OWL	35 × 12.50R17LT	121S	10PR	10.0	877	318	13.0	1450	—	450	—
OWL	35 × 12.50R18LT	123S	10PR	10.0	877	318	13.0	1550	—	450	—
OWL	35 × 12.50R20LT	121S	10PR	10.0	877	318	13.0	1450	—	450	—



Complete
specifications



3D block design
enhances the grip ability
on both wet and dry road,
protect the thread against
injury under severe road
conditions



Double carcasses,
obdurability



Sidewall
protection,
beauty

CF4000 SUV/CUV

FOR
SUV AND CUV
HOT

Applicable
models



Asymmetric tread design

for excellent riding stability and precise handling on wet roads.



4 Circumferential grooves

for excellent water evacuation, minimize the risk of aquaplaning at high speed.



Various sipes and lateral grooves

efficiently reduce the rinding noise.



Silica tread compound

for lower rolling resistance and better grip performance.



Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
225/60R18	104V	XL	6.5	727	228	8.3	900	340	320AA
245/60R18	105V	Std	7.0	751	248	8.3	925	300	320AA
275/40R20	106W	XL	9.5J	728	278	8.5	950	340	320AA
225/55ZR18	102W	XL	7.0	705	233	8.3	850	340	320AA
255/55ZR18	109W	XL	8.0	737	265	8.3	1030	340	320AA
255/55ZR19	111W	XL	8.0	763	265	8.3	1090	340	320AA
275/55ZR20	117W	XL	8.5J	810	284	8.3	1285	340	320AA
245/50ZR18	104W	XL	7.5J	703	253	8.3	900	340	320AA
265/50ZR20	111W	XL	8.5J	774	277	8.3	1090	340	320AA
285/50ZR20	116W	XL	9J	794	297	8.3	1250	340	320AA
275/45ZR20	110W	XL	9.0	756	273	8.5	1060	340	320AA
295/35ZR21	107W	XL	10.5	739	301	8.5	975	340	320AA
245/50RF18 RFT	100V	/	7.5	703	253	8.2	800	300	320AA
255/55RF18 RFT	105V	/	8	737	265	8.2	925	300	320AA

CF2000 H/T

FOR
HIGHWAY
TERRAIN
HOTApplicable
models

Designed for
paved
road use



**Zigzag sipes on the
shoulder block and
tread**

are for reducing noise level
and improving traction in both
wet and dry conditions.



**4 circumferential
grooves**
for excellent water evacu-
ation for good wet
traction.



Wider center rib
for stable handling at
high speed straight
line driving.



Size	LI/SS	PR	Dimensions (mm)			Max.Load (kg)		Max. Press (kPa)	UTQG	Size	LI/SS	PR	Dimensions (mm)			Max.Load (kg)		Max. Press (kPa)	UTQG
			OD	SW	NSD	Single	Dual						OD	SW	NSD	Single	Dual		
215/75R15	100H	6.0	703	216	8.5	800	—	300	420AA	265/65R17	112H	8.0	776	272	8.8	1120	—	300	420AA
225/75R15	102H	6.0	719	223	8.5	850	—	300	420AA	275/65R17	119H XL	8.0	790	279	8.8	1360	—	340	420AA
235/75R15	105H	6.5	733	235	8.5	925	—	300	420AA	285/65R17	116H	8.5	802	292	8.8	1250	—	300	420AA
265/75R16	116T	7.5	804	267	8.8	1250	—	300	420AA	275/65R18	116H	8.0	815	279	8.8	1250	—	300	420AA
205/70R14	95H	6.0	644	209	8.5	690	—	300	420AA	205/60R16	92V	6.0	652	209	8.5	630	—	300	420AA
205/70R15	96H	6.0	669	209	8.5	710	—	300	420AA	215/60R17	96V	6.5	690	221	8.5	710	—	300	420AA
215/70R16	100H	6.5	708	221	8.5	800	—	300	420AA	225/60R17	103H XL	6.5	702	228	8.5	875	—	340	420AA
225/70R16	103H	6.5	722	228	8.5	875	—	300	420AA	235/60R18	107H XL	7.0	739	240	8.5	975	—	340	420AA
235/70R16	106H	7.0	736	240	8.5	950	—	300	420AA	265/60R18	114H XL	8.0	775	272	8.8	1180	—	340	420AA
245/70R16	107H	7.0	750	248	8.5	975	—	300	420AA	275/60R20	115H	8.0	838	279	8.8	1215	—	300	420AA
255/70R16	111H	7.5	764	260	8.8	1090	—	300	420AA	235/55R17	103W XL	7.5	690	245	8.5	875	—	340	420AA
265/70R16	112H	8.0	778	272	8.8	1120	—	300	420AA	215/55R18	99W XL	7.0	693	226	8.5	775	—	340	420AA
275/70R16	114H	8.0	792	279	8.8	1180	—	300	420AA	235/55R18	104W XL	7.5	715	245	8.5	900	—	340	420AA
205/65R16	95H	6.0	672	209	8.5	690	—	300	420AA	235/50R18	101W XL	7.5	693	245	8.5	825	—	340	420AA
215/65R16	102H XL	6.5	686	221	8.5	850	—	340	420AA	235/60R17	106H XL	7.0	714	240	8.5	950	—	340	420AA
225/65R17	102H	6.5	724	228	8.5	850	—	300	420AA	215/75R15LT	116/114S 10PR	6	703	216	8.5	1250	1180	550	—
235/65R17	108H XL	7.0	738	240	8.5	1000	—	340	420AA	245/70R17LT	119/116S 10PR	7.0	776	248	10.8	1360	1250	550	—
245/65R17	107H	7.0	750	248	8.5	975	—	300	420AA	265/70R17LT	121/118S 10PR	8.0	804	272	10.8	1450	1320	550	—
255/65R17	110H	7.5	764	260	8.8	1060	—	300	420AA										

CF710 UHP/RFT

ULTRA HIGH
PERFORMANCE
/ RUN FLAT
NEW

Applicable
models



3+1 Longitudinal grooves

enhance the wet grip performance to prevent the aquaplaning.



Asymmetric tread design

outside with strong shoulder for good turning stability, inside shoulder with multisipes for excellent water drainage.



Variable pitch design

from inside and outside greatly reduces the riding noise.



Wider centre rib

for stable handling with straight line driving at high speed.



Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	UTQG	Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	UTQG
205/55R16	91V	Std	6.5J	632	214	8.2	615	300	380/A/A	235/45ZR18	98W	XL	8J	669	236	8.2	750	340	380/A/A
215/55R16	97V	XL	7J	642	226	8.0	730	340	380/A/A	245/45ZR18	100W	XL	8J	677	243	8.2	800	340	380/A/A
225/55R16	95V	Std	7J	654	233	8.0	690	300	380/A/A	255/45ZR18	103W	XL	8.5J	687	255	8.5	875	340	380/A/A
185/50R16	81V	Std	6J	592	194	8.0	462	300	380/A/A	205/40ZR18	86W	XL	7.5J	621	212	8.0	530	340	380/A/A
195/50R16	84V	Std	6J	602	201	8.0	500	300	380/A/A	215/40ZR18	89W	XL	7.5J	629	218	8.0	580	340	380/A/A
205/50R16	87V	Std	6.5J	612	214	8.0	545	300	380/A/A	225/40ZR18	92W	XL	8J	637	230	8.0	630	340	380/A/A
195/45R16	80V	Std	6.5J	582	195	8.0	450	300	380/A/A	235/40ZR18	95W	XL	8.5J	645	241	8.2	690	340	380/A/A
205/45R16	83V	Std	7J	590	206	8.0	487	300	380/A/A	245/40ZR18	97W	XL	8.5J	653	248	8.2	730	340	380/A/A
215/55R17	94V	Std	7J	668	226	8.0	670	300	380/A/A	255/40ZR18	99W	XL	9J	661	260	8.5	775	340	380/A/A
225/55R17	101W	XL	7J	680	233	8.0	825	340	380/A/A	245/45ZR19	102W	XL	8J	703	243	8.2	850	340	380/A/A
235/55R17	103W	XL	7.5J	690	245	8.2	875	340	380/A/A	225/40ZR19	93W	XL	8J	663	230	8.0	650	340	380/A/A
205/50R17	89V	Std	6.5J	638	214	8.0	580	300	380/A/A	235/40ZR19	96W	XL	8.5J	671	241	8.2	710	340	380/A/A
215/50R17	91V	Std	7J	648	226	8.0	615	300	380/A/A	245/40ZR19	98W	XL	8.5J	679	248	8.2	750	340	380/A/A
225/50R17	94W	Std	7J	658	233	8.0	670	300	380/A/A	275/40ZR19	105W	XL	9.5J	703	278	8.5	925	340	380/A/A
235/50R17	100W	XL	7.5J	668	245	8.2	800	340	380/A/A	245/35ZR19	93W	XL	8.5J	655	248	8.2	650	340	380/A/A
205/45R17	84V	Std	7J	616	206	8.0	500	300	380/A/A	295/30ZR19	100W	XL	10.5J	661	301	8.5	800	340	380/A/A
215/45ZR17	91W	XL	7J	626	213	8.0	615	340	380/A/A	245/35ZR20	95W	XL	8.5J	680	248	8.2	690	340	380/A/A
225/45ZR17	94W	XL	7.5J	634	225	8.0	670	340	380/A/A	255/35ZR20	97W	XL	9J	686	260	8.5	730	340	380/A/A
235/45ZR17	97W	XL	8J	644	236	8.2	730	340	380/A/A	205/55RF16 RFT	91V	/	6.5	632	214	8.2	615	300	380 A A
245/45ZR17	99W	XL	8J	652	243	8.2	775	340	380/A/A	225/55RF17 RFT	101V	XL	7.0	680	233	8.2	825	340	380 A A
255/45ZR17	102W	XL	8.5J	662	255	8.3	850	340	380/A/A	225/50RF17 RFT	98V	XL	7.0	658	233	8.2	750	340	380 A A
205/40ZR17	84W	XL	7.5J	596	212	8.0	500	340	380/A/A	245/45RF18 RFT	100V	XL	8	677	248	8.2	800	340	380 A A
215/45ZR18	93W	XL	7J	651	213	8.0	650	340	380/A/A	225/40RF18 RFT	92W	XL	8	637	230	8.2	630	340	380 A A
225/45ZR18	96W	XL	7.5J	659	225	8.0	690	340	380/A/A	245/40RF18 RFT	97V	XL	8.5	653	248	8.2	730	340	380 A A

CF720 UHP

ULTRA
HIGH
PERFORMANCE
NEW

Applicable
models



4+4 circumferential grooves
for excellent water drainage in wet conditions.



Flowing uni-directional tread design

on road driving considered high speed stability, off road driving, and strong traction. Given tough tread block.



Newly developed shoulder design

solve irregular wear problem and minimize noise level.



Silica tread compound

for better grip performance on both dry and wet surface.



Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
305/45ZR22	118W	XL	10J	833	303	8.5	1320	340	420 A A
305/40ZR22	114W	XL	11J	803	313	8.5	1180	340	420 A A
265/35ZR22	102W	XL	9.5J	745	271	8.5	850	340	420 A A
245/30ZR22	92W	XL	8.5J	707	248	8.5	630	340	420 A A
295/35ZR24	110W	XL	10.5J	816	301	8.5	1060	340	420 A A
305/35ZR24	112W	XL	11J	824	313	8.5	1120	340	420 A A
255/30ZR24	97W	XL	9J	764	260	8.5	730	340	420 A A
295/30ZR26	107W	XL	10.5J	838	301	8.5	975	340	420 A A
305/30ZR26	109W	XL	11J	844	313	8.5	1030	340	420 A A
275/25ZR26	98W	XL	10J	798	283	8.5	750	340	420 A A
295/25ZR28	103Y	XL	10.5J	859	301	8.5	875	340	420 A A
325/30ZR28	115Y	XL	11.5	729	331	8.5	1215	340	420 A A
305/25ZR28	105Y	XL	11J	812	313	8.5	925	340	420 A A
245/40ZR22	101W	XL	8.5J	755	248	8.5	825	340	420 A A
245/35ZR22	97W	XL	8.5J	731	248	8.5	730	340	420 A A
295/30ZR22	103W	XL	10.5J	737	301	8.5	875	340	420 A A
295/25ZR22	97W	XL	10.5J	707	301	8.5	730	340	420 A A
275/25ZR24	96W	XL	10J	748	283	8.5	710	340	420 A A

RF500 RUN-FLAT



Applicable
models



Prevent irregular wear

newly developed directional tread design solved irregular wear.



Aggressive uni-directional tread design

for excellent water evacuation and reduces aquaplaning at high speed.



Variable pitch

combination on the shoulder blocks and sipes on the tread surface for quiet riding.



Silica tread compound

for lower rolling resistance and excellent road holding.

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
205/55RF16 RFT	94W	XL	6.5	632	214	8.2	670	350	380 A A
225/55RF17 RFT	101W	XL	7.0	680	233	8.2	825	350	380 A A
225/50RF17 RFT	98W	XL	7.0	658	233	8.2	750	350	380 A A

CF600 HP

HIGH
PERFORMANCE
NEWApplicable
models**Uni-directional tread design levels up symmetrical pattern design**

for excellent water evacuation and reduces aquaplaning at high speed.

**4 circumferential straight grooves**

LEVEL UP

**Prevent irregular wear**
newly developed directional tread design solved irregular wear.**Variable pitch**
combination on the shoulder blocks and siping on the tread surface for quiet riding.**Silica tread compound**
for lower rolling resistance and lower fuel consumption.

★ LEVEL UP

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
★ 155/70R13	75T	Std	4.5	548	157	7.8	387	300	380 A A
155/80R13	79T	Std	5.0	578	157	7.9	437	300	380 A A
★ 165/70R13	79T	Std	5.0	562	170	7.8	437	300	380 A A
★ 175/70R13	82H	Std	5.0	576	177	7.8	475	300	380 A A
★ 165/70R14	81H	Std	5.0	588	170	7.8	462	300	380 A A
★ 175/70R14	84H	Std	5.0	602	177	7.8	500	300	380 A A
★ 185/70R14	88H	Std	5.5	616	189	8.0	560	300	380 A A
215/70R15	98H	Std	6.5	683	221	8.2	750	300	380 A A
★ 195/70R14	91H	Std	6.0	630	201	8.0	615	300	380 A A
★ 175/65R14	82H	Std	5.0	584	177	7.8	475	300	380 A A
★ 185/65R14	86H	Std	5.5	596	189	8.2	530	300	380 A A
★ 175/65R15	84H	Std	5.0	609	177	7.8	500	300	380 A A
★ 185/65R15	88H	Std	5.5	621	189	8.2	560	300	380 A A
★ 195/65R15	91H	Std	6.0	635	201	8.2	615	300	380 A A
★ 205/65R15	94H	Std	6.0	647	209	8.2	670	300	380 A A
215/65R15	96H	Std	6.5	661	221	8.2	710	300	380 A A
★ 185/60R14	82H	Std	5.5	578	189	8.2	475	300	380 A A
★ 185/60R15	84H	Std	5.5	603	189	8.2	500	300	380 A A
★ 195/60R15	88H	Std	6.0	615	201	8.2	560	300	380 A A
★ 205/60R15	91H	Std	6.0	627	209	8.2	615	300	380 A A
215/60R15	94H	Std	6.5	639	221	8.2	670	350	380 A A
225/60R15	96V	Std	6.5	651	228	8.2	710	300	380 A A
★ 195/60R16	89H	Std	6.0	640	201	8.2	580	300	380 A A
★ 205/60R16	92V	Std	6.0	652	209	8.2	630	300	380 A A
215/60R16	95H	Std	6.5	664	221	8.2	690	300	380 A A
225/60R16	98V	Std	6.5	676	228	8.2	750	350	380 A A
235/60R16	100H	Std	7.0	688	240	8.2	800	300	380 A A

CF930 Winter HP



Applicable models



Special Y-style directional pattern design



Advanced silica compound



Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)
				OD	SW	NSD							OD	SW	NSD		
165/70R13	79T	Std	5.0	562	170	8.4	437	300	225/55R16	99H	XL	7.0	654	233	8.7	775	340
165/70R14	81T	Std	5.0	588	170	8.4	462	300	215/55R17	98H	XL	7.0	668	226	8.7	750	340
175/70R14	88T	XL	5.0	602	177	8.4	560	340	225/55R17	101H	XL	7.0	680	233	8.7	825	340
185/70R14	88T	Std	5.5	616	189	8.5	560	300	195/50R15	82H	Std	6.0	577	201	8.7	475	300
175/65R14	82T	Std	5.0	584	177	8.4	475	300	205/50R17	93H	XL	6.5	638	214	8.7	650	340
185/65R14	86T	Std	5.5	596	189	8.5	530	300	225/50R17	98H	XL	7.0	658	233	8.7	750	340
175/65R15	84T	Std	5.0	609	177	8.4	500	300									
185/65R15	88T	Std	5.5	621	189	8.5	560	300									
195/65R15	91T	Std	6.0	635	201	8.7	615	300									
205/65R15	94T	Std	6.0	647	209	8.7	670	300									
185/60R14	82T	Std	5.5	578	189	8.5	475	300									
185/60R15	88H	XL	5.5	603	189	8.5	560	340									
195/60R15	88H	Std	6.0	615	201	8.7	560	300									
205/60R16	96H	XL	6.0	652	209	8.7	710	340									
215/60R16	99H	XL	6.5	664	221	8.7	775	340									
195/55R15	85H	Std	6.0	595	201	8.7	515	300									
195/55R16	91H	XL	6.0	620	201	8.7	615	340									
205/55R16	91T	Std	6.5	632	214	9	615	300									
215/55R16	97H	XL	7.0	642	226	8.7	730	340									

CF960 Winter SUV/UHP

DESIGNED
FOR WINTER
SUV/UHP
NEW

Applicable
models



Asymmetric tread design

provides balanced performance for different driving conditions.



Advanced silica compound

keeps rubber flexible for maximum performance in extreme cold temperatures in winter.



High density 3D sipes

ensure the general rigidity of the tread, improve the adhesive power between wheel and the ice-snow ground, and strengthen the holding ability.



Well-designed footprint

for excellent handling ability in both ice-snow and dry-wet road conditions.

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)
				OD	SW	NSD							OD	SW	NSD		
215/75R15	100T	Std	6J	703	216	11.5	800	300	245/55R19	107H	XL	7.5J	753	253	9.5	975	340
235/70R16	106T	Std	7J	736	240	11.5	950	300	235/50R19	103V	XL	7 1/2J	719	245	11.5	875	340
245/75R17	112T	Std	7J	800	248	11.5	1120	300	255/45R19	104V	XL	8 1/2J	713	255	11.5	900	340
285/70R17	117T	Std	8 1/2J	832	292	11.5	1285	300	225/45R19	96H	XL	7 1/2J	685	225	9.5	710	340
235/55R17	103H	XL	7 1/2J	690	245	11.5	875	340	245/45R19	102V	XL	8J	703	243	9.5	850	340
215/50R17	91H	Std	7J	648	226	9.5	615	300	275/40R19	105V	XL	9 1/2J	703	278	9.5	925	340
235/45R17	97V	XL	8J	644	236	9.5	730	340	245/50R20	105V	XL	7.5J	754	253	11.5	925	340
235/65R18	106T	/	7.0J	763	240	11.5	950	300	285/50R20	116V	XL	9J	794	297	11.5	1250	340
265/60R18	110T	Std	8J	775	272	11.5	1060	300	245/45R20	103V	XL	8J	728	243	11.5	875	340
285/60R18	116T	Std	8 1/2J	799	292	11.5	1250	300	275/45R20	110V	XL	9J	756	273	11.5	1060	340
215/55R18	99H	XL	7J	693	226	11.5	775	340	245/40R20	99V	XL	8 1/2J	704	248	9.5	775	340
235/55R18	104H	XL	7 1/2J	715	245	11.5	900	340	275/40R20	106V	XL	9 1/2J	728	278	11.5	950	340
245/50R18	101V	XL	7 1/2J	693	245	11.5	825	340	275/35R20	102V	XL	9 1/2J	700	278	9.5	850	340
245/50R18	104V	XL	7 1/2J	703	253	9.5	900	340	315/35R20	110V	XL	11J	728	320	11.5	1060	340
275/45R18	107V	XL	9J	705	273	9.5	975	340	275/50R21	113V	XL	8.5J	809	284	11.5	1150	340
255/45R18	103V	XL	8 1/2J	687	255	9.5	875	340	275/45R21	110V	XL	9J	781	273	11.5	1060	340
225/45R18	95H	XL	7 1/2J	659	225	9.5	690	340	275/40R22	107V	XL	9 1/2J	779	278	11.5	975	340
255/40R18	99V	XL	9J	661	260	9.5	775	340									
275/55R19	111H	Std	8 1/2J	785	284	11.5	1090	300									

CF700

UHP



Applicable models

Handling

Silence

Wet Traction

Braking

Silica

CF500

HP



Applicable models

Winter

Silence

Comfort

Wet Traction

Silica

Product Detail

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
205/45ZR17	88W	XL	7.0	616	206	8.2	560	350	380 A A
215/45ZR17	91W	XL	7.0	626	213	8.2	615	350	380 A A
225/45ZR17	94W	XL	7.5	634	225	8.5	670	350	380 A A
235/45ZR17	97W	XL	8.0	644	236	8.5	730	350	380 A A
245/45ZR18	100W	XL	8.0	677	243	8.5	800	350	380 A A
245/45ZR19	102W	XL	8.0	703	243	8.5	850	350	380 A A
195/40ZR17	81W	XL	7.0	588	200	8.0	462	350	380 A A
205/40ZR17	84W	XL	7.5	596	212	8.5	500	350	380 A A
215/40ZR17	87W	XL	7.5	604	218	8.5	545	350	380 A A
245/40ZR17	95W	XL	8.5	628	248	8.5	690	350	380 A A
225/40ZR18	92W	XL	8.0	637	230	8.5	630	350	380 A A
235/40ZR18	95W	XL	8.5	645	241	8.5	690	350	380 A A
255/40ZR19	100W	XL	9.0	687	260	8.5	800	350	380 A A
275/40ZR19	105W	XL	9.5	703	278	8.5	925	350	380 A A
245/40ZR20	99W	XL	8.5	704	248	8.5	775	350	380 A A
215/35ZR18	84W	XL	7.5	607	218	8.5	500	350	380 A A
235/35ZR19	91W	XL	8.5	647	241	8.5	615	350	380 A A
225/35ZR20	90W	XL	8.0	666	230	8.5	600	350	380 A A
245/35ZR20	95W	XL	8.5	680	248	8.5	690	350	380 A A
275/35ZR20	102W	XL	9.5	700	278	8.5	850	350	380 A A
225/30ZR20	85W	XL	8.0	644	230	8.5	515	350	380 A A

Product Detail

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
185/55R15	82V	Std	6.0	585	194	8.2	475	350	380 A A
195/55R15	85V	Std	6.0	595	201	8.2	515	350	380 A A
205/55R15	88V	Std	6.5	607	214	8.2	560	350	380 A A
195/55R16	87V	Std	6.0	620	201	8.2	545	350	380 A A
205/55R16	94W	XL	6.5	632	214	8.2	670	350	380 A A
215/55R16	97W	XL	7.0	642	226	8.2	730	350	380 A A
225/55R16	99W	XL	7.0	654	233	8.2	775	350	380 A A
205/55R17	95W	XL	6.5	658	214	8.2	690	350	380 A A
215/55R17	98W	XL	7.0	668	226	8.2	750	350	380 A A
225/55R17	101W	XL	7.0	680	233	8.2	825	350	380 A A
235/55R17	103W	XL	7.5	690	245	8.2	875	350	380 A A
195/50R15	82V	Std	6.0	577	201	8.0	475	350	380 A A
205/50R15	86V	Std	6.5	587	214	8.0	530	350	380 A A
185/50R16	81V	Std	6.0	592	194	8.0	462	350	380 A A
195/50R16	84V	Std	6.0	602	201	8.0	500	350	380 A A
205/50R16	87W	Std	6.5	612	214	8.2	545	350	380 A A
225/50R16	92W	Std	7.0	632	233	8.2	630	350	380 A A
205/50R17	93W	XL	6.5	638	214	8.2	650	350	380 A A
215/50R17	95W	XL	7.0	648	226	8.2	690	350	380 A A
225/50R17	98W	XL	7.0	658	233	8.2	750	350	380 A A
195/45R15	82V	XL	6.5	557	195	8.0	475	350	380 A A
205/55RF16 RFT	94W	XL	6.5	632	214	8.2	670	350	380 A A
225/55RF17 RFT	101W	XL	7.0	680	233	8.2	825	350	380 A A
225/50RF17 RFT	98W	XL	7.0	658	233	8.2	750	350	380 A A

CF510

HP



Applicable models



Wet Traction



Silence



Economy



High Mileage

CF610

HP



Applicable models



Economy



Silence



Comfort



Wet Traction

Product Detail

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
185/70R13	86H	Std	5.5J	590	189	8.0	530	300	440 A A
185/70R14	88H	Std	5.5J	616	189	8.0	560	300	440 A A
195/70R14	91H	Std	6J	630	201	8.0	615	300	440 A A
205/70R14	95H	Std	6J	644	209	8.2	690	300	440 A A
215/70R14	96H	Std	6.5J	658	221	8.2	710	300	440 A A
185/65R14	86H	Std	5.5J	596	189	8.2	530	300	440 A A
195/65R14	89H	Std	6J	610	201	8.2	580	300	440 A A
185/60R14	82H	Std	5.5J	578	189	8.2	475	300	440 A A
195/60R14	86H	Std	6J	590	201	8.2	530	300	440 A A
205/70R15	96H	Std	6J	669	209	8.2	710	300	440 A A
215/70R15	98H	Std	6.5J	683	221	8.2	750	300	440 A A
185/65R15	88H	Std	5.5J	621	189	8.2	560	300	440 A A
195/65R15	91H	Std	6J	635	201	8.2	615	300	440 A A
205/65R15	94H	Std	6J	647	209	8.2	670	300	440 A A
215/65R15	96H	Std	6.5J	661	221	8.2	710	300	440 A A
185/60R15	84H	Std	5.5J	603	189	8.2	500	300	440 A A
195/60R15	88H	Std	6J	615	201	8.2	560	300	440 A A
205/60R15	91V	Std	6J	627	209	8.2	615	300	440 A A
215/60R15	94H	Std	6.5J	639	221	8.2	670	300	440 A A
225/60R15	96V	Std	6.5J	651	228	8.2	710	300	440 A A
185/55R15	82V	Std	6J	585	194	8.0	475	300	440 A A
195/55R15	85V	Std	6J	595	201	8.2	515	300	440 A A
205/55R15	88V	Std	6.5J	607	214	8.2	560	300	440 A A
195/50R15	82V	Std	6J	577	201	8.0	475	300	440 A A
205/50R15	86V	Std	6.5J	587	214	8.2	530	300	440 A A
195/60R16	89H	Std	6J	640	201	8.2	580	300	440 A A
205/60R16	92V	Std	6J	652	209	8.2	630	300	440 A A
215/60R16	95V	Std	6.5J	664	221	8.2	690	300	440 A A
225/60R16	98H	Std	6.5J	676	228	8.2	750	300	440 A A
235/60R16	100H	Std	7J	688	240	8.2	800	300	440 A A
205/55R16	91V	Std	6.5J	632	214	8.2	615	300	440 A A

Product Detail

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
165/70R13	79T	Std	5	562	170	7.8	437	300	440 A A
175/70R13	82T	Std	5	576	177	7.8	475	300	440 A A
165/65R13	77T	Std	5	544	170	7.8	412	300	440 A A
165/70R14	81H	Std	5	588	170	7.8	462	300	440 A A
175/70R14	84H	Std	5	602	177	7.8	500	300	440 A A
175/65R14	82H	Std	5	584	177	7.8	475	300	440 A A
165/55R14	72H	Std	5	538	170	7.8	355	300	440 A A
175/65R15	84H	Std	5	609	177	7.8	500	300	440 A A
165/60R15	77H	Std	5	579	170	7.8	412	300	440 A A
165/55R15	75V	Std	5	563	170	7.8	387	300	440 A A


CF300

Commercial/VAN



CF350

Commercial/VAN

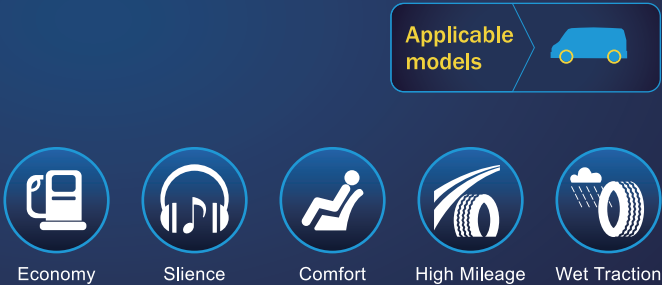

Product Detail

Size	LI/SS	PR	Rim	Dimensions (mm)		Max.Load(kg)		Max.Press (kPa)
				OD	SW	Single	Dual	
185R14C 8PR	102/100Q	8PR	5.5	650	188	850	800	450
WSW 185R14C 8PR	102/100Q	8PR	5.5	650	188	850	800	450
195R14C 8PR	106/104Q	8PR	5.5	666	198	950	900	450
WSW 195R14C 8PR	106/104Q	8PR	5.5	666	198	950	900	450
205R14C 8PR	107/105R	8PR	6.0	686	208	975	925	450
WSW 195R15C 8PR	106/104R	8PR	5.5	693	196	950	900	450
195R15C 8PR	106/104R	8PR	5.5	693	196	950	900	450
WSW 205/75R14C 8PR	109/107R	8PR	5.5	664	203	1030	975	475
WSW 205/75R15C 8PR	110/108R	8PR	5.5	689	203	1060	1000	475
185/75R16C 8PR	104/102R	8PR	5.0	684	184	900	850	475
195/75R16C 8PR	107/105R	8PR	5.5	698	196	975	925	475
WSW 205/75R16C 8PR	110/108R	8PR	5.5	714	203	1060	1000	475
225/75R16C 10PR	121/120R	10PR	6.0	744	223	1450	1400	575
195/70R15C 8PR	104/102R	8PR	6.0	655	201	900	850	450
WSW 205/70R15C 8PR	106/104R	8PR	6.0	669	209	950	900	450
215/70R15C 8PR	109/107S	8PR	6.5	683	221	1030	975	450
225/70R15C 8PR	112/110R	8PR	6.5	697	228	1120	1060	450
195/65R16C 8PR	104/102R	8PR	6.0	660	201	900	850	475
205/65R16C 8PR	107/105T	8PR	6.0	672	209	975	925	475
215/65R16C 8PR	109/107T	8PR	6.5	686	221	1030	975	475
225/65R16C 8PR	112/110T	8PR	6.5	698	228	1120	1060	475
235/65R16C 8PR	115/113T	8PR	7.0	712	240	1215	1150	475

Product Detail

Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max.Press (kPa)
				OD	SW	NSD	Single	Dual	
155R13C	90/88S	8PR	4.5	578	157	10.0	600	560	450
165R13C	94/93S	8PR	4.5	594	165	10.0	670	650	450
165R14C	96/95S	8PR	4.5	620	165	10.0	710	690	450
175R13C	97/95S	8PR	5.0	610	177	10.0	730	690	450
175/75R16C	101/99R	8PR	5.0	668	177	9.0	825	775	475
215/75R16C	116/114S	10PR	6.0	728	216	9.0	1250	1180	525
165/70R13C	88/86S	6PR	5.0	562	170	10.0	560	530	375
165/70R14C	84/80S	6PR	5.0	588	170	10.0	500	450	350
175/70R14C	98/96S	8PR	5.0	602	177	10.0	750	710	450
185/70R14C	102/100S	8PR	5.5	616	189	10.0	850	800	450
175/65R14C	90/88T	6PR	5.0	584	177	10.0	600	560	375
205/65R15C	102/100T	6PR	6.0	647	209	9.0	850	800	375
215/60R16C	108/106T	8PR	6.5	664	221	9.0	1000	950	475
215/60R17C	109/107T	8PR	6.5	690	221	9.0	1030	975	475
235/60R17C	117/115T	10PR	7.0	714	240	9.0	1285	1215	525
185R14C	102/100Q	8PR	5.5	650	188	9.0	850	800	450
195R14C	106/104Q	8PR	5.5	666	198	9.0	950	900	450
195R15C	106/104R	8PR	5.5	693	198	9.0	950	900	450

Sports K4 HP



Applicable models



Economy



Handling



Silence



Comfort

CF950 Winter SUV



Applicable models



Economy



Winter



Wet Traction



Braking



Silica


Product Detail

Size	LI/SS	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
			OD	SW	NSD			
185/75R14	89H	5.0	634	184	7.3	580	300	380 A A
155/65R14	75S	4.5	558	157	7.2	387	300	380 A A
165/65R14	79S	5.0	570	170	7.2	437	300	380 A A
165/65R15	81H	5.0	595	170	7.2	462	300	380 A A
165/60R14	75H	5.0	554	170	7.2	387	300	380 A A
155/60R15	74H	4.5	567	157	7.2	375	300	380 A A
165/60R15	77H	5.0	579	170	6.8	412	300	380 A A
175/60R15	81H	5.0	591	177	7.1	462	300	380 A A
165/55R14	72V	5.0	538	170	6.8	355	300	380 A A
165/55R15	75V	5.0	563	170	6.8	387	300	380 A A
175/55R15	77V	5.5	573	182	7.2	412	300	380 A A
165/50R15	73V	5.0	547	170	6.8	365	300	380 A A
165/50R16	75V	5.0	572	170	6.8	387	340	380 A A
165/45R15	68V	5.5	529	165	6.8	315	300	380 A A
165/45R16	74VXL	5.5	554	165	6.8	375	340	380 A A
165/40R16	73VXL	6.0	538	170	6.8	365	340	380 A A

Product Detail

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)
				OD	SW	NSD		
215/70R16	100T	Std	6.5	708	221	8.7	800	300
245/70R16	111T	XL	7.0	750	248	9.2	1090	340
215/65R16	98H	Std	6.5	686	221	8.7	750	300
225/65R17	106H	XL	6.5	724	228	8.7	950	340
235/65R17	108H	XL	7.0	738	240	9.5	1000	340
265/65R17	112T	Std	8.0	776	272	9.2	1120	300
215/60R17	96H	Std	6.5	690	221	8.7	710	300
225/60R17	99H	Std	6.5	702	228	9.0	775	300
235/60R17	102H	Std	7.0	714	240	9.2	850	300
235/60R18	107H	XL	7.0	739	240	9.2	975	340
255/55R18	109H	XL	8.0	737	265	9.2	1030	340
255/50R19	107V	XL	8.0	739	265	9.2	975	340
225/45R17	94H	XL	7.5	634	225	9	670	340
245/45R18	100V	XL	8.0	677	243	9.2	800	340
225/40R18	92V	XL	8.0	637	230	9	630	340

CF970 Winter Studdable

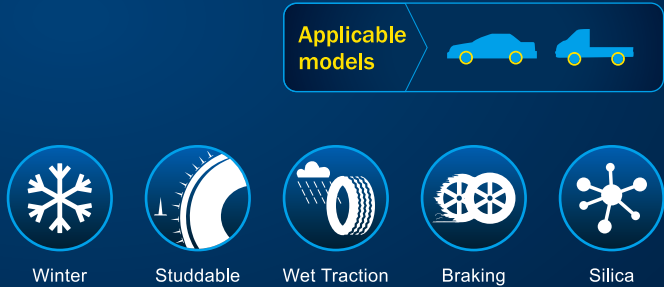

CF900 Winter HP




Product Detail

Size	LI/SS	Rim	Dimensions (mm)			Max.Load(kg)		Max.Press (kPa)
			OD	SW	NSD	Single	Dual	
195/65R15	91T	6.0	635	201	10.2	615	—	300
185/75R16C 8PR	104/102R	5.0	684	184	10.5	900	850	475

Product Detail

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)
				OD	SW	NSD		
185/65R14	86T	Std	5.5	596	189	9.3	530	300
185/65R15	88T	Std	5.5	621	189	9.3	560	300
195/65R15	91T	Std	6.0	635	201	9.3	615	300
205/65R15	94T	Std	6.0	647	209	9.3	670	300
215/65R16	98T	Std	6.5	686	221	9.3	750	300

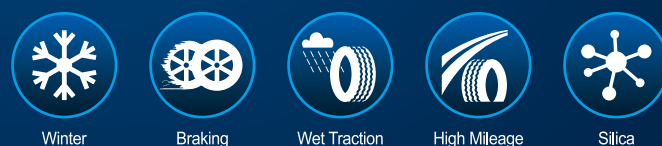

4

SPECIFICATION TAG & MARKING METHOD

TAG detail

Tire Brand Comforser

Specification 245/45ZR18 100W

Series CF700

245 / 45 ZR 18 100 W

245 Section Width	ZR/Z means Speed Over 240km/h	100 = LI W = SS 18 = RIM (inch)
45 Aspect Ratio		

Speed

Speed symbol indicates the maximum travel speed that the tire can achieve under stated condition.

SS	Maximum Speed (km/h)
L	120
Q	160
S	180
T	190
H	210
V	240
W	270
Y	300
* ZR	over 240km/h

* ZR means a certain range of speed

Maximum speed refers to the speed that the tire can achieve on flat road after normal installation.

Loading Index

Load index refers to numeral value of tire's maximum load ability under stated condition.

LI	loading capacity	LI	loading capacity	LI	loading capacity	LI	loading capacity
60	250	76	400	91	615	106	950
61	257	77	412	92	630	107	975
62	265	78	425	93	650	108	1000
63	272	79	437	94	670	109	1030
64	280	80	450	95	690	110	1060
65	290	81	462	96	710	111	1090
66	300	82	475	97	730	112	1120
67	307	83	487	98	750	113	1150
68	315	84	500	99	775	114	1180
69	325	85	513	100	800	115	1215
70	335	86	530	101	825	116	1250
71	345	87	545	102	850	117	1285
72	355	88	560	103	875	118	1320
73	365	89	580	104	900	119	1360
74	375	90	600	105	925	120	1400
75	387						

SAFE&ECO DRIVING

Safety Driving

Please obey the traffic laws and regulations, keep cautious and respect the other drivers and pedestrians.

Eco Driving

The idea of "Green and Environment" is always recommended, and the advice below will save maintenance costs, extend service life of tire and save fuel.

TIRE USAGE

Tire Maintenance

For the sake of safety, you should check the tire regularly at least once a month. Be cautious about the damage and uneven wear, tire pressure abnormality, positioning, balance or suspension failure will affect overall tire performance and cause danger. Tire is the only contact surface between vehicles and ground, and it should be in a good condition.

- Check the tire pressure regularly, especially before long time driving. If tire is incorrectly inflated, it will lead to increase of rolling resistance and extra fuel consumption.
- Faster driving speed will result in greater air resistance so as to increase fuel consumption.
- Keep smooth driving will avoid abrupt acceleration and sudden braking.
- Convert to higher gear as soon as possible to prevent the engine running fast at lower gear.
- Use air conditioner properly. If you don't need it, turn off all electrical equipment, for example the electrically heated rear window.
- Get ready for starting the engine. Switch off the engine if you predict the car will park longer than a few minutes.
- Check the wheel positioning and wheel camber angle by professional tire maintenance personnel regularly, and make sure that the car running smoothly and stably, which is a important factor for fuel saving.

Tire Rotation

Tire rotation is a simple and effective way to prolong tire service life through balancing degree of wear.

